

A3		LENGTH	0.5-6	6-30	30-120	120-315	315-1000	1000-2000	RAD/CHAMF	0.5-3	3-6	6-30	30-120	120-315	ANGLE(shorter side length)	0.5-10	10-50	50-120	120-400
		TOLERANCE	±0.2	±0.3	±0.4	±0.7	±2.0	±4.0	TOLERANCE	±0.2	±0.5	±1	±2	±4	TOLERANCE	±1°	±0.5°	±0.3°	±0.2°

Roly-Tray


PVC CHANNEL



TYPE - R1

AVAILABLE IN TYPE

Sr. No.	Size H x W mm
1.	15 x 15
2.	25 x 25
3.	30 x 25
4.	45 x 25
5.	45 x 45
6.	45 x 60
7.	60 x 25
8.	60 x 45
9.	60 x 60
10.	75 x 25
11.	75 x 45
12.	75 x 75
13.	80 x 25
14.	80 x 45
15.	80 x 60
16.	80 x 80
17.	100 x 100

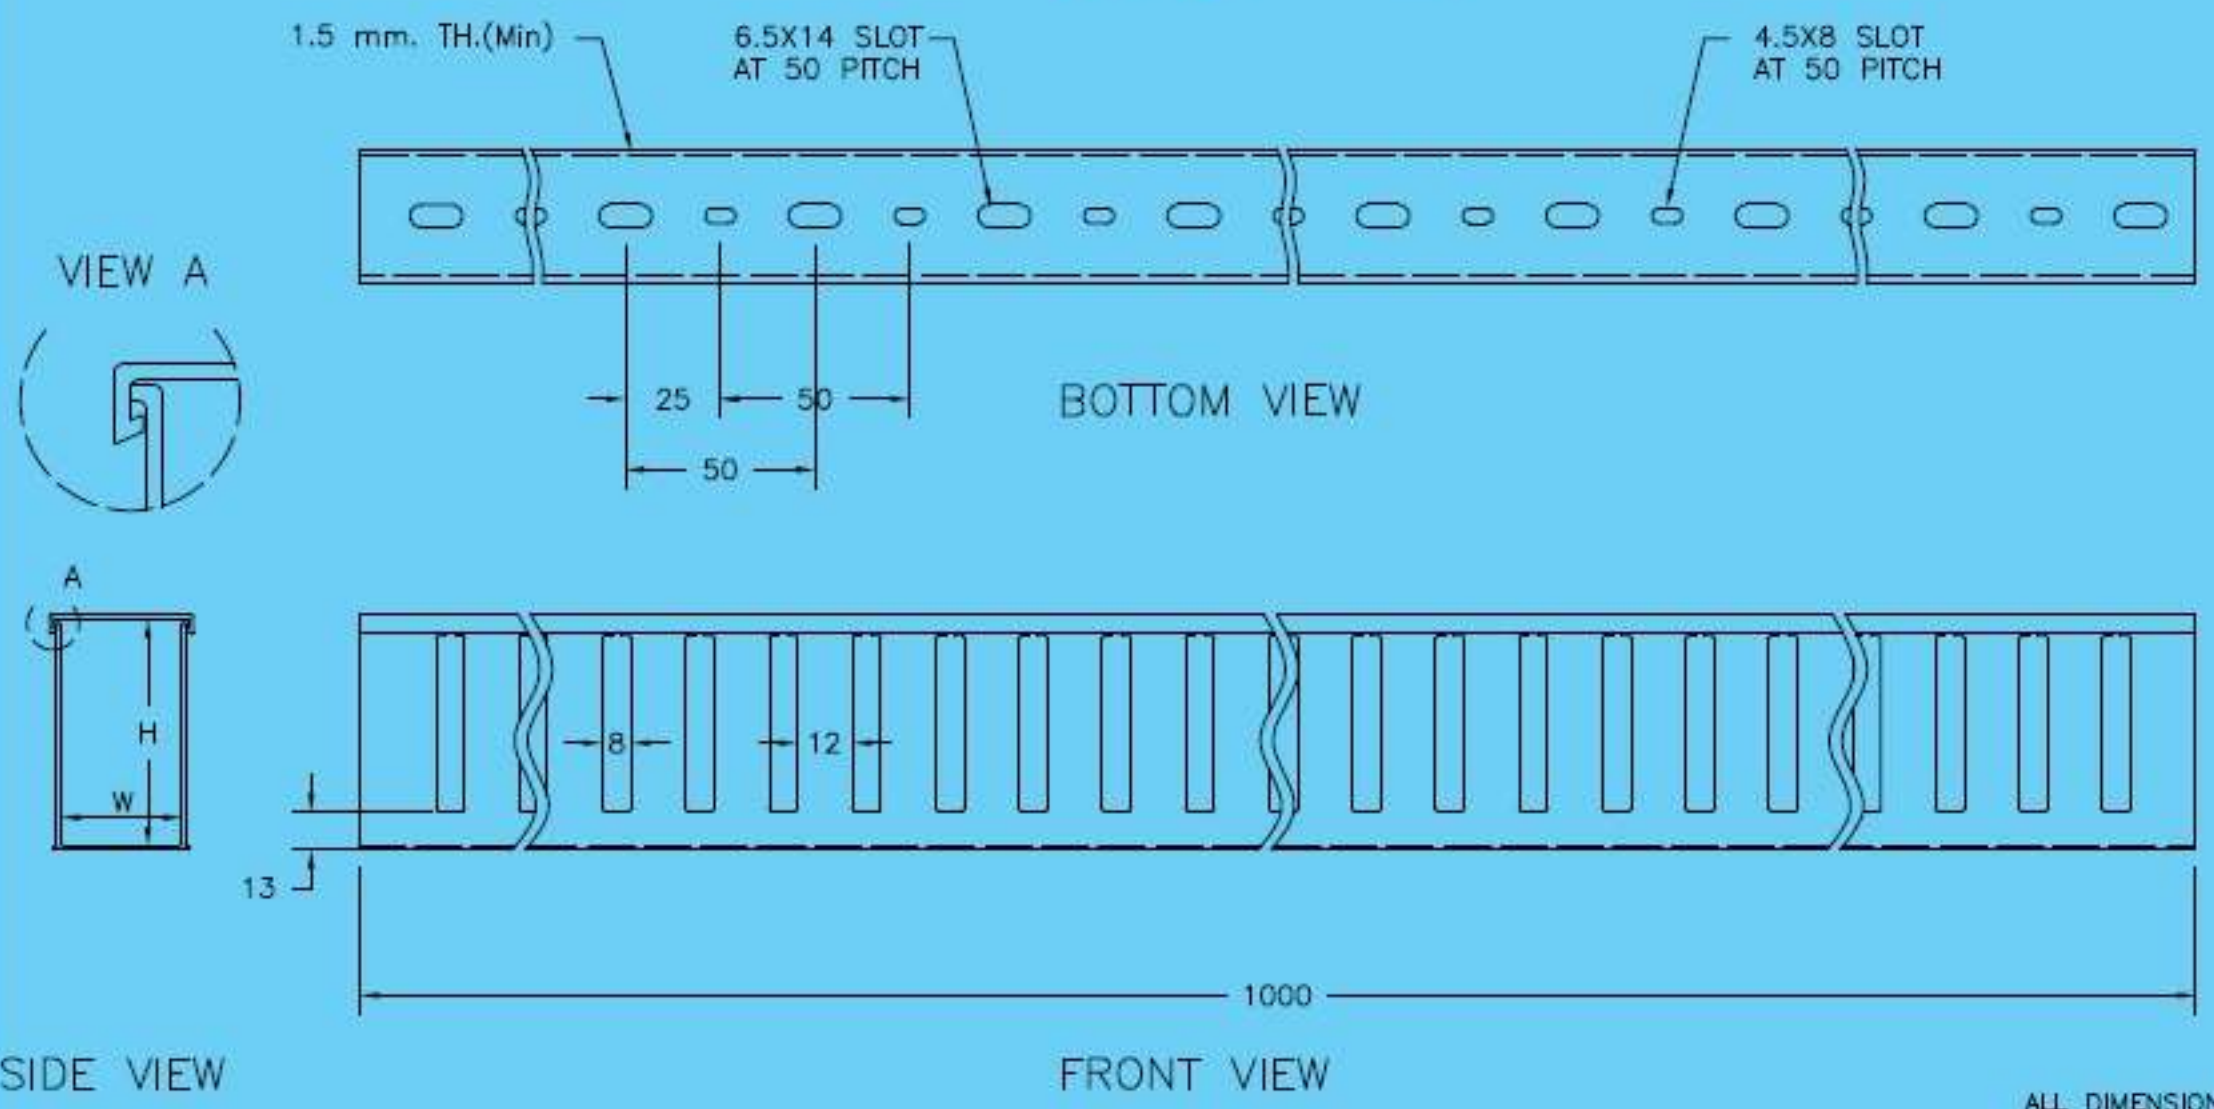

ALL DIMENSION METRIC

COLOUR/LENGTH: LIGHT GREY / ONE METRE. MECHANICAL PROPERTIES: TENSILE STRENGTH - >320 KG / SQ CM. IZOD IMPACT STRENGTH - > 7 CM / CM	ELECTRICAL PROPERTIES: DIELECTRIC STRENGTH - >12KV/MM. SPECIFIC RESISTANCE - 6.1X10 OHM/CM THERMAL PROP.: FLAMMABILITY-UL94V-0.	WARNING THIS WORK & THE INFORMATION IT CONTAINS ARE THE PROPERTY OF THE ROLY-TRAY COMPANY. IT IS DELIVERED TO OTHERS ON THE EXPRESS CONDITION THAT IT WILL BE USED ONLY FOR OR ON BEHALF OF ROLY TRAY THAT NEITHER IT NOR THE INFORMATION IT CONTAINS WILL BE REPRODUCED OR DISCLOSED, IN WHOLE OR IN PART, WITHOUT THE PRIOR WRITTEN CONSENT OF ROLY-TRAY, AND THAT ON DEMAND IT & ANY COPIES STILL BE PROMPTLY RETURNED TO ROLY-TRAY.	DWG. NO. 006/R1/2007							
		ROLY-TRAY INDUSTRIES	PVC TROUGH MATERIAL: RIGID POLYVINYLCHLORIDE (PVC) FLAME RETARDANT COLOUR GREY	<table border="1"> <tr> <td>VM</td> <td>ORIGINAL DATE</td> </tr> <tr> <td>CHD: KBS/SCS</td> <td>08-05-09</td> </tr> <tr> <td>APPD: SRR</td> <td>3 SHEETS</td> </tr> <tr> <td>ORDER:</td> <td>SHEET 1</td> </tr> </table>	VM	ORIGINAL DATE	CHD: KBS/SCS	08-05-09	APPD: SRR	3 SHEETS
VM	ORIGINAL DATE									
CHD: KBS/SCS	08-05-09									
APPD: SRR	3 SHEETS									
ORDER:	SHEET 1									


A3		LENGTH	0.5-6	6-30	30-120	120-315	315-1000	1000-2000	RAD/CHAMF	0.5-3	3-6	6-30	30-120	120-315	ANGLE(shorter side length)	0.5-10	10-50	50-120	120-400
		TOLERANCE	±0.2	±0.3	±0.4	±0.7	±2.0	±4.0	TOLERANCE	±0.2	±0.5	±1	±2	±4	TOLERANCE	±1°	±0.5°	±0.3°	±0.2°



Roly-Tray
PVC CHANNEL



TYPE - R2

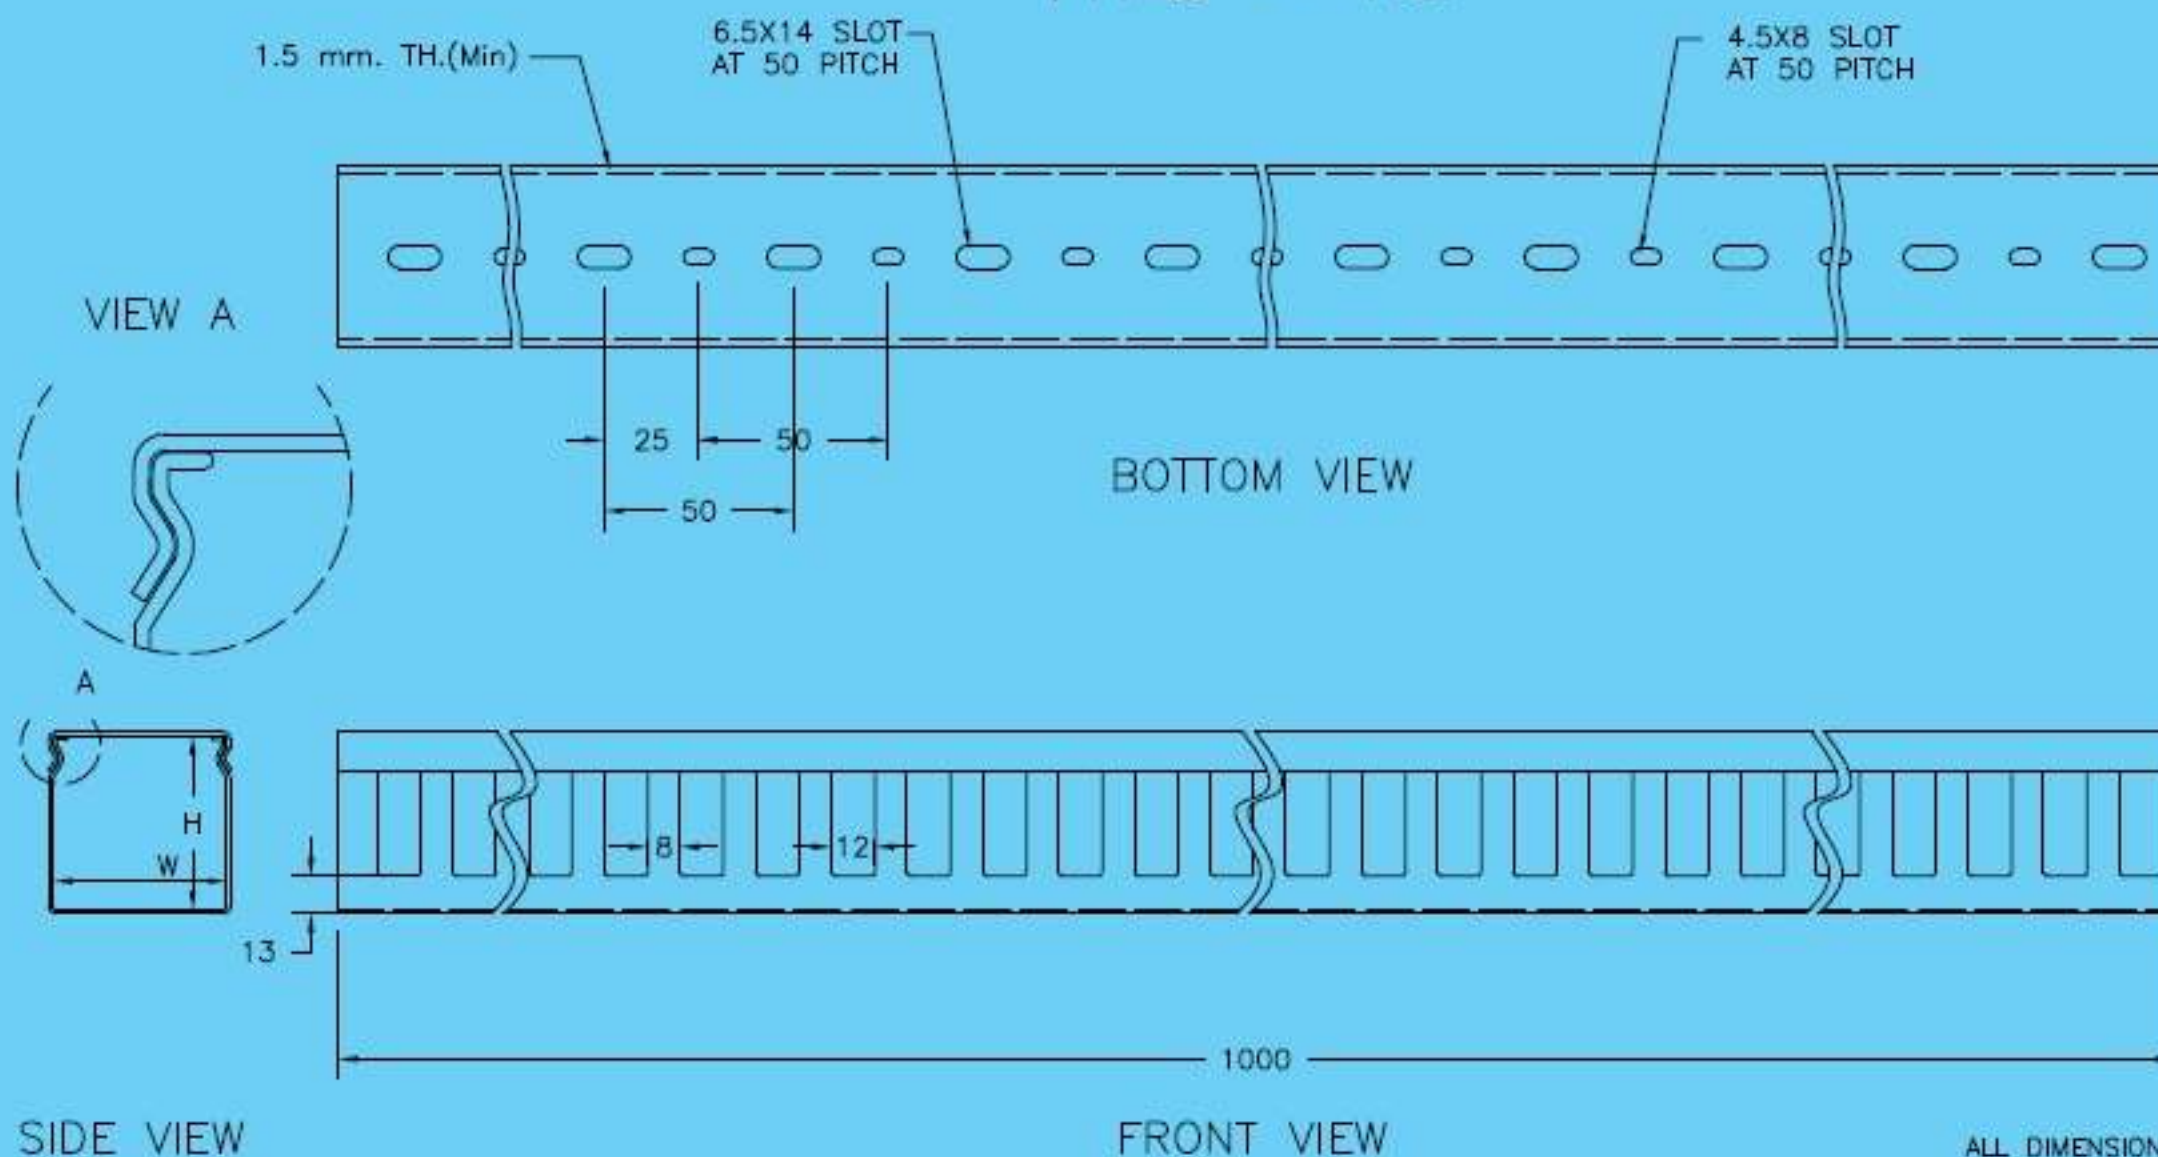

AVAILABLE IN TYPE

Sr. No.	Size H x W mm
1.	15 x 15
2.	25 x 25
3.	30 x 25
4.	45 x 25
5.	45 x 45
6.	45 x 60
7.	60 x 25
8.	60 x 45
9.	60 x 60
10.	75 x 25
11.	75 x 45
12.	75 x 60
13.	75 x 75
14.	80 x 80
15.	100 x 100
16.	150 x 150

COLOUR/LENGTH: LIGHT GREY / ONE METRE.
MECHANICAL PROPERTIES:
TENSILE STRENGTH - >320 KG / SQ CM.
IZOD IMPACT STRENGTH - > 7 CM / CM

ELECTRICAL PROPERTIES:
DIELECTRIC STRENGTH - >12KV/MM.
SPECIFIC RESISTANCE - 6.1X10 OHM/CM
THERMAL PROP.: FLAMMABILITY-UL94V-0.

WARNING

THIS WORK & THE INFORMATION IT CONTAINS ARE THE PROPERTY OF THIS ROLY-TRAY COMPANY. IT IS DELIVERED TO OTHERS ON THE EXPRESS CONDITION THAT IT WILL BE USED ONLY FOR OR ON BEHALF OF ROLY TRAY THAT NEITHER IT NOR THE INFORMATION IT CONTAINS WILL BE REPRODUCED OR DISCLOSED, IN WHOLE OR IN PART, WITHOUT THE PRIOR WRITTEN CONSENT OF ROLY-TRAY, AND THAT ON DEMAND IT & ANY COPIES STILL BE PROMPTLY RETURNED TO ROLY-TRAY.

ROLY-TRAY
INDUSTRIES

PVC TROUGH

MATERIAL:
RIGID POLYVINYLCHLORIDE (PVC)
FLAME RETARDANT
COLOUR GREY

DWG.
007/R2/2007

DRAWN: VM	ORIGINAL DATE
CHD: KBS/SCS	08-05-09
APPD: SRR	3 SHEETS
ORDER:	SHEET 2

A3		LENGTH	0.5-6	6-30	30-120	120-315	315-1000	1000-2000	RAD/CHAMF	0.5-3	3-6	6-30	30-120	120-315	ANGLE(shorter side length)	0.5-10	10-50	50-120	120-400
		TOLERANCE	±0.2	±0.3	±0.4	±0.7	±2.0	±4.0	TOLERANCE	±0.2	±0.5	±1	±2	±4	TOLERANCE	±1°	±0.5°	±0.3°	±0.2°

HEIGHT >	30	45	60	80	100
WIDTH >	25	45	60	80	100
TOLERANCE	±2.00	±2.00	±2.00	±2.00	±2.00

THICKNESS	1.50 to 2.00	2.00 to 2.50	2.50 to 3.00
TOLERANCE	±0.20	±0.30	±0.40



Roly-Tray




PVC CHANNEL



TYPE - R3

AVAILABLE SIZES


Sr. No.	Height	Width	Thickness	Slotting
1.	30	25	1.70	TS
2.	45	25	1.80	TS
3.	45	45	1.80	TS
4.	45	60	1.90	TS
5.	60	25	1.90	TS
6.	60	45	2.20	TS
7.	60	60	2.20	TS
8.	80	25	2.40	TS
9.	80	45	2.40	TS
10.	80	60	2.40	TS
11.	80	80	2.70	TS
12.	100	45	2.70	SS
13.	100	60	2.70	SS
14.	100	80	2.80	SS
15.	100	100	2.80	SS

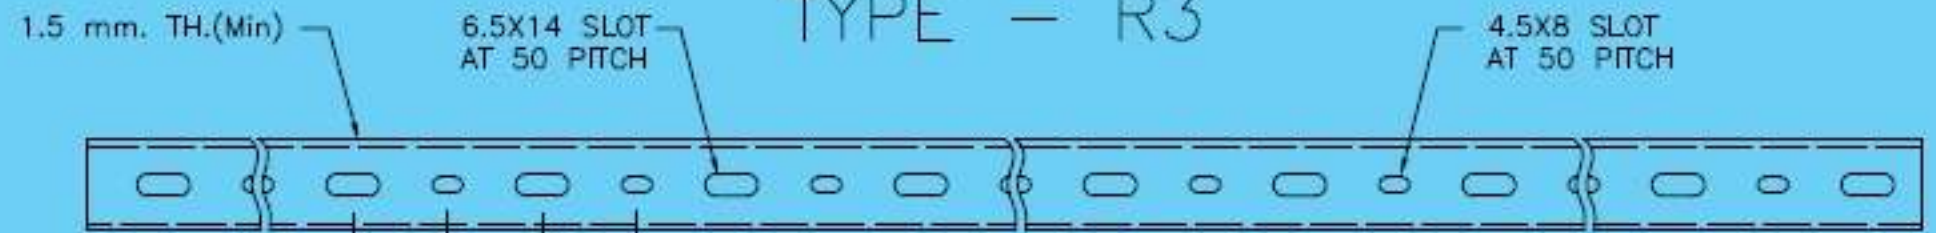

BOTTOM VIEW



SIDE VIEW

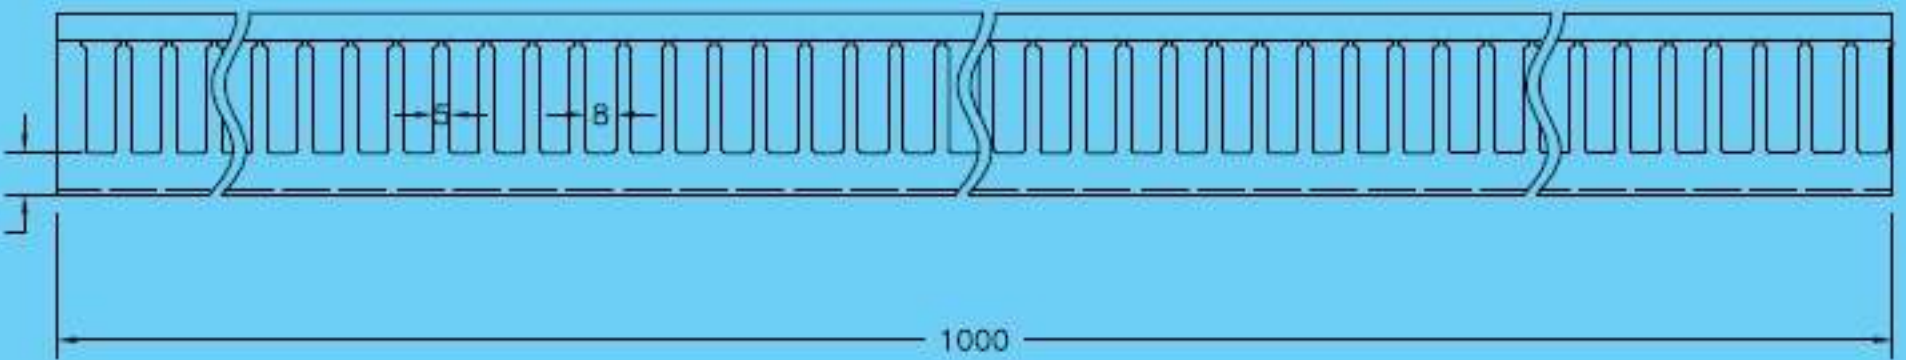

FRONT VIEW

TS- THIN SLOTTING = 5X8mm
SS- STANDARD SLOTTING = 8X12mm

ALL DIMENSIONS METRIC

COLOUR/LENGTH: LIGHT GREY / ONE METRE. MECHANICAL PROPERTIES: TENSILE STRENGTH - >320 KG / SQ CM. IZOD IMPACT STRENGTH - > 7 CM / CM	ELECTRICAL PROPERTIES: DIELECTRIC STRENGTH - >12KV/MM. SPECIFIC RESISTANCE - 6.1X10 OHM/CM THERMAL PROP.: FLAMMABILITY-UL94V-0.	WARNING THIS WORK & THE INFORMATION IT CONTAINS ARE THE PROPERTY OF THE ROLY-TRAY COMPANY. IT IS DELIVERED TO OTHERS ON THE EXPRESS CONDITION THAT IT WILL BE USED ONLY FOR OR ON BEHALF OF ROLY TRAY THAT NEITHER IT NOR THE INFORMATION IT CONTAINS WILL BE REPRODUCED OR DISCLOSED, IN WHOLE OR IN PART, WITHOUT THE PRIOR WRITTEN CONSENT OF ROLY-TRAY, AND THAT ON DEMAND IT & ANY COPIES STILL BE PROMPTLY RETURNED TO ROLY-TRAY.	DWG. 010/R3/2009
		PVC TROUGH	26/06/10
		MATERIAL: RIGID POLYVINYLCHLORIDE (PVC) FLAME RETARDANT COLOUR GREY	DRAWN: VM CHD: KBS/SCS APPD: SRR ORDER:
		ROLY-TRAY INDUSTRIES	ORIGINAL DATE 10-11-09 3 SHEETS SHEET 3