(A TE-Connectivity - RPG Enterprises JV)

Raychem RPG

Reliable Connections. Always...

A Brighter Tomorrow

Through Stronger Connections




Price List

Energy Product | 1ST October, 2026


Raychem RPG

PURPOSE

Reliable Connections. Always...

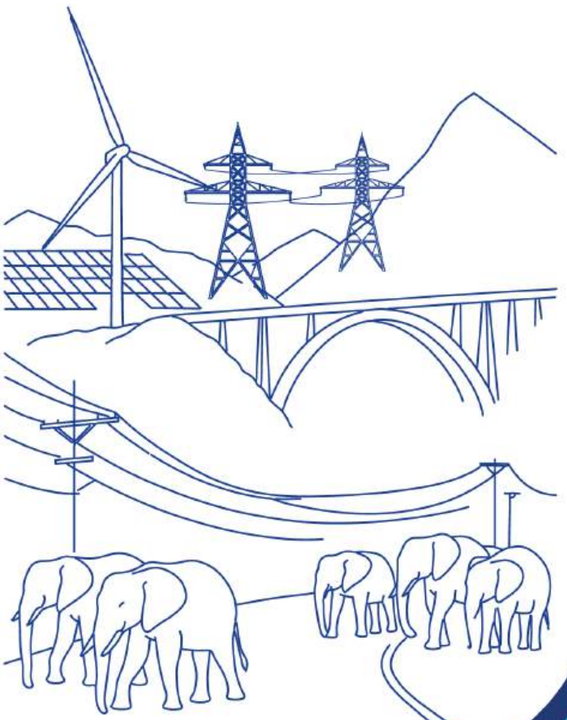

MISSION

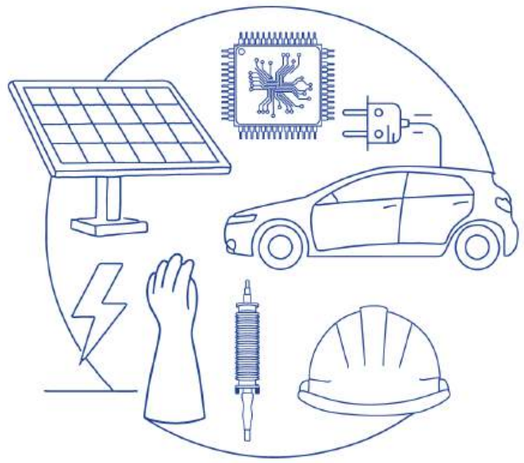


Deliver Exceptional Value

by fostering collaboration, agility & innovation

VISION

To Grow


2X in topline and
3X in bottomline
by 2030

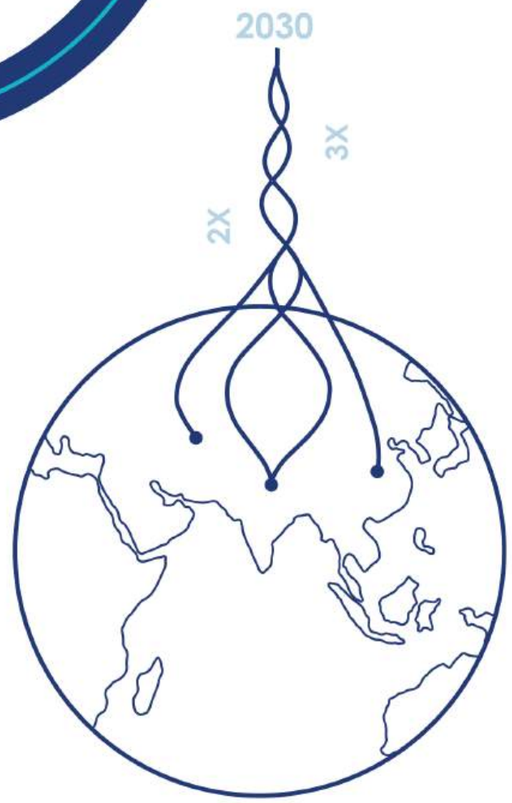

VALUES

Collaboration

- Seek help & solve together
- Allow the best idea to win
- Ensure outcomes





Customer Intimacy

- Listen to understand
- Solve for long term
- Delight customers

Always Relentless

- Continue to improve
- Speak up even if it's the hard truth
- Act with urgency





Forward Thinking

- Anticipate for tomorrow
- Plan ahead
- Embrace change

CONTENT

INSULATION & PROTECTION
01-12

LOW VOLTAGE CABLE ACCESSORIES
15-21

ENCLOSURES
64-75

ELECTRICAL SAFETY
79-111

MEDIUM VOLTAGE CABLE ACCESSORIES
22-45

HIGH VOLTAGE CABLE ACCESSORIES
47

SERVICE OFFERINGS & INSTALLATION
113-116

INSTALLATION CHARGES - INCLUSION & EXCLUSION
117

EXTRA HIGH VOLTAGE CABLE ACCESSORIES
48-49

SOLAR CONNECTOR
50

INSTALLATION CHARGES - TERMS & CONDITIONS
118

GENERAL TERMS & WARRANTY POLICY
120

CONNECTORS & FITTINGS
52-56

AMPACT C-WEDGE CONNECTORS
59-62

Get the **Smart Installation** Service Edge!

Aimed at maximizing productivity, conserving energy, minimizing costs, and enhancing safety, our **Raychem RPG** Cable Accessories Installation Service have benefitted many Industries and Power Distribution Companies in the last two decades.

So gain the advantage of professional services, Installation of Raychem RPG Energy products.







We go the extra mile!

For more information please contact the nearest regional office.

Explore Our Product Range

Please contact the nearest branch office for information on the following products:

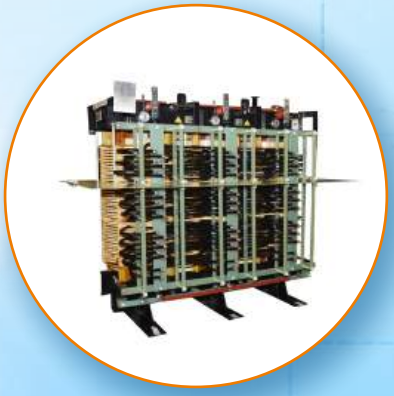

Energy Products

Insulation and Protection

Connectors and Fittings

- Railway Connector
- Transformer Connector



Other Products

Earthing and Lightning Protection Systems

Transformer

- Oil Filled transformers
- Dry Type transformer






INSULATION & PROTECTION



HEAT-SHRINKABLE TUBES

Heat-Shrinkable Busbar Insulation Tubing - MODEL **BPTM**






- Suitable for voltage up to 25 kV, application ø 6.5-150 mm
- Excellent flexibility can be installed on a wide range of curved or bent busbars without cracking or creasing
- Exceptional insulation and long term reliability even at high continuous operating temperature
- Good thermal emissivity and contact with busbars means no derating is required
- Excellent anti-tracking properties
- Flame retardant and non-halogen based material

Model	Size- Expanded/ Recovered (in mm)	* Rectangular bars Ø L +T (in mm) (min. - max.)	* Round bars Ø D (in mm) (min. - max.)	# Roll Length (in meter)	PCN	List Price (INR) Per Meter
BPTM	15/6	12-18	6.5-12	30	**JAA0090009**	**1350**
	30/12	22-38	13.5-25	30	**JAA0090327**	**1600**
	50/20	36-65	22-43	30	**JAA0090328**	**2250**
	75/30	55-95	33-63	20	**JAA0090329**	**3200**
	100/40	70-130	44-86	25	**JAA0090324**	**4350**
	120/50	90-165	55-105	25	**JAA0090325**	**6850**
	175/70	125-235	80-150	15	**JAA0090326**	**11400**

* To be used on the busbar sizes
\# Supplied In continuous length

Heat-Shrinkable Busbar Insulation Tubing - MODEL **RBPM**





- Suitable for voltage up to 25 kV, application ø 6.5-150 mm
- Excellent flexibility can be installed on a wide range of curved or bent busbars without cracking or creasing
- Exceptional insulation and long term reliability even at high continuous operating temperature
- Good thermal emissivity and contact with busbars means no derating is required
- Excellent anti-tracking properties
- Flame retardant material


Model	Size- Expanded/ Recovered (in mm)	* Rectangular bars Ø L +T (in mm) (min. - max.)	* Round bars Ø D (in mm) (min. - max.)	# Roll Length (in meter)	PCN	List Price (INR) Per Meter
RBPM	30/12	22-38	13.5-25	30	**DGA6000004**	**850**
	50/20	36-65	22-43	30	**DGA6000001**	**1150**
	75/30	55-95	33-63	20	**DGA6000002**	**1600**
	100/40	70-130	44-86	25	**DGA6000003**	**2150**
	120/50	90-165	55-105	25	**DGA6000011**	**4400**
	175/70	125-235	80-150	15	**DGA6000009**	**5600**

* To be used on the busbar sizes
\# Supplied In continuous length

HEAT-SHRINKABLE TUBES

Heat-Shrinkable Busbar Insulation Tubing - MODEL **BBIT**





- Suitable for voltage up to 36 kV, application ø 11-125 mm
- Excellent flexibility can be installed on a wide range of curved or bent busbars without cracking or creasing
- Exceptional insulation and long term reliability even at high continuous operating temperature
- Good thermal emissivity and contact with busbars means no derating is required
- Excellent anti-tracking properties
- Flame retardant and non-halogen based material

Model	Size-Expanded/ Recovered (in mm)	* Rectangular bars Ø L +T (in mm) (min. - max.)	* Round bars Ø D (in mm) (min. - max.)	# Roll Length (in meter)	PCN	List Price (INR) Per Meter
BBIT	25/10	17-18	11-20	25	**AAA9000006**	**3800**
	40/16	28-45	18-32	20	**JAA0090322**	**4450**
	65/25	44-69	28-47	15	**JAA0090323**	**4700**
	100/40	69-102	44-72	15	**JAA0090320**	**7000**
	150/60	102-148	65-105	15	**JAA0090002**	**11200**
	175/80	133-196	85-125	10	**JAA0090321**	**20000**

* To be used on the busbar sizes
\# Supplied In continuous length

Medium Wall Insulating Uncoated Tube - MODEL **MWTM**



- Medium-wall low voltage insulation and core protection tubing up to medium voltage
- Suitable for general sealing and rejacketing of insulated cables
- 3:1 shrink ratio with high shelf life
- REACH and RoHS compliant

Model	Size-Expanded/ Recovered (in mm)	Cable Use Range (min. - max.) (in mm)	# Roll Length (in meter)	PCN	List Price (INR) Per Meter
MWTM	10/3	3-9	40	**AAA0000905**	**800**
	16/5	6-14	40	**JAA0010323**	**800**
	25/8	9-22	40	**JAA0010331**	**850**
	35/12	13-32	30	**JAA0010334**	**900**
	50/16	17-43	25	**JAA0010336**	**1250**
	85/25	25-74	20	**JAA0010342**	**3500**
	115/34	36-99	20	**JAA0010319**	**6750**
	140/42	46-119	20	**JAA0010321**	**6850**

\# Supplied In continuous length

HEAT-SHRINKABLE TUBES

Outer Protection Insulating Coated Tube - MODEL **WCSM**




- Thick-wall low voltage insulation and outer sealing tubing
- Available in-line coated with hot melt adhesive
- High material hardness with semi rigid flexibility
- 3:1 shrink ratio with high shelf life
- REACH and RoHS compliant

Model	Size- Expanded/ Recovered (in mm)	Cable Use Range (min. - max.) (in mm)	PCN	List Price (INR) Per Nos.
WCSM	24/6	6.5-22	JAA0010403	2700
	33/8	9-31	JAA0010404	3000
	48/12	13-44	JAA0010405	3000
	56/16	17.5-50	JAA0010407	3100
	90/25	27-81	JAA0010410	5250
	130/35	38-118	JAA0010396	13800
	160/50	55-144	JAA0010400	14250
	180/50	55-162	JAA0010402	14700

Note : Supplied in standard length of 1500mm

HEAT-SHRINKABLE WRAPAROUND SLEEVE

Cable Outer Jacket Repair Sleeve - MODEL **IRJ**



- Suitable for Standard Poly or elastomeric insulated cables
- Fast & Labour saving installation
- Moisture vapor transmission barrier
- Fitting and sealing all in one step
- Abrasion and corrosion resistant

Model	Cable Outer Dia (in mm)	Length (in mm)	PCN	List Price (INR) Per Nos.
IRJ	10-40	525	AAA9000042	950
	10-40	700	AAA9000043	1300
	24-56	700	AAA9000044	1950
	32-82	910	AAA9000046	3450
	40-110	965	AAA9000047	4600
	57-145	1100	AAA9000049	5550
	57-145	1500	AAA0135009	7600

MEDIUM VOLTAGE LINE COVER

Medium Voltage Line Cover - MODEL MVLC

- Presenting the pre-engineered Medium Voltage Line Covers MVLC Retrofit Solution.
- MVLC provides state-of-the-art insulation to help prevent electrical outages caused by trees or wildlife or civil structure coming into contact with distribution lines.
- It can be applied selectively on problem area such as distribution lines passing very closely to any civil structure, cyclone or natural calamity prone region, forest, etc.
- It is made up of a cross-linked material to create an extremely robust insulation system, ensuring many years of reliable operation in the harshest environments.



- Three sizes cover wide range of conductors from 16-800 Sq. mm.
- Cost-effective solution no need of replacing conductor & line hardware
- UV stable as well as tracking and erosion resistant
- REACH and RoHS Compliant

Model	Size (in mm.)	System Voltage (kV)	Spool length (in meter)	PCN	List Price (INR) Per Meter
MVLC (Coated)	14-A/241	33kV	100	JAA0010285	3950
	18-A/241		75	JAA0010286	4650
	38-A/241		50	AAA9764007	8050

MEDIUM VOLTAGE CONDUCTOR COVERS

Medium Voltage Conductor Covers - MODEL MVCC




- Suitable for applications up to 25 kV phase to ground
- Protection for leads and jumpers Four sizes are available and will fit conductors with diameters up to 44 mm (1.75")
- Made from a non-tracking silicone material
- Superior tracking resistance
- Simple, quick, tool free and wrap around installation

Model	Description	Use Range UOM: mm (Inches)	Supplied Length UOM: M	PCN	List Price (INR) Per Nos.
MVCC - Grey Colour	MVCC-G-19/.75 x 15	11 (0.45) - 19 (0.75)	1 Piece - 15 Mtr	AJA7050029	56700
	MVCC-G-25/1.0 x 9	19 (0.75) - 28 (1.125)	1 Piece - 09 Mtr	AJA7050024	47200
	MVCC-G-45/1.75 x 9	28 (1.125) - 44 (1.75)	1 Piece - 09 Mtr	AJA7050022	60200

RIGID RED BARRIER BOARD

Rigid Red Barrier Board - MODEL RRBB

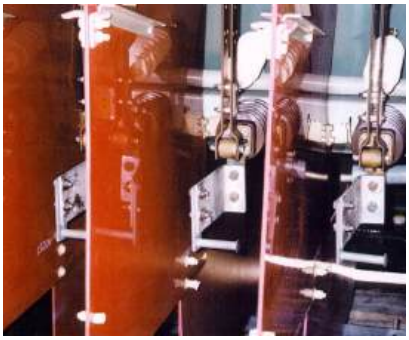

- Excellent tracking-resistant properties provide longevity
- Innovative cross-linking polymer withstands power-arcs without compromising its physical shape
- High temperature resistant
- Superior tracking resistance
- The use of RRBB barriers allows switchgear cabinets to be protected against interphase flashovers that can be caused by contaminants, moisture, and animals
- The RRBB board is made from a homogenous polymer & has excellent track resistance, especially following a power-arc

Model	Catalog Number	Supplied Length	Thickness	PCN	List Price (INR) Per No.
RRBB	RRBB- 2050/775-5-B	775 x 2050 MM	5 MM	**AAA9063002**	**436050**

INSULATING COVERS

Bus/Bushing Connection Insulating Covers - MODEL BCIC









- Designed to protect energized conductors or busbars from flashovers due to contact with birds, squirrels, and other wildlife
- BCIC parts are made from a UV-stable, track-resistant, high performance material to ensure years of reliable service
- A variety of different shapes and sizes are available to cover circuit breaker bushings, bus standoff insulators, capacitors, transformer bushings, voltage regulators, potential transformers and more
- Installation can be made quickly in the field by trimming the entry and exit holes to the required dimensions
- The BCIC covers can be re-entered for other maintenance needs and then reused, thus lowering overall lifetime costs

* For price please contact the nearest regional office.

HEAT SHRINKABLE TAPE

Busbar Insulation Tape - MODEL **HVBT**



- A single layer of tape with two-third overlapped is suitable for 17.5 kV AC voltage and dual layer for 36 kV AC voltage
- Wide operating temperature -40˚C to 90˚C
- Excellent thermal emissivity means no busbar derating is required
- Adhesive-coating produce a complete lap to lap seal
- Non-Adhesive to metal or porcelain, allowing easy removal for maintenance

Model	Description	Tape Width (in mm.)	PCN	List Price (INR) Per Meter
HVBT	12-A	25	**AAB0000369**	**1100**
	14-A	50	**AAB0000370**	**2200**
	15-A	75	**AAB0000371**	**4750**
	16-A	100	**AAB0000372**	**5100**

Note : Supplied in standard roll length of 10 meter

COLD APPLIED TAPE

Medium Voltage Fusion Tape - MODEL **MVFT**



- Silicone self-amalgamating fusion tape
- A single layer of tape with two-third overlapped is suitable for 15 kV AC voltage and dual layer for 35 kV AC voltage
- Wide operating temperature 0 C to 90 C
- Designed to combine the integrity of a Silicone polymer with the versatility of a wraparound product
- It sticks to itself and other insulating materials, it will not adhere to metal or porcelain allowing easy removal for maintenance
- Offers easy installation over a wide variety of shapes including complex connections

Model	Tape Width (in mm.)	PCN	List Price (INR) Per Meter
MVFT	50	**JAP0050006**	**1350**

Note : Supplied in standard roll length of 10 meter

COLD APPLIED BOOT

Elastomeric Insulating Bushing Boot - MODEL **SE-CAB, E-CAB & CAB**



- Easy tool free installation
- One product for straight and right angle application
- Ideal for switchgear and transformer cable boxes
- Non-tracking elastomeric housing having high erosion resistance

Model	System Voltage (kV)	Cable Size (in sq. mm)	PCN	List Price (INR) Per Set
SE-CAB	11kV	25-400	**AAA9066009**	**4650**
E-CAB			**AAA9000032**	**4850**
CAB			**AAA9000030**	**4850**

* One set contain 3 Nos.

HEAT SHRINKABLE END CAP

Cable End Sealing Caps



- Suitable for all cable types
- High resistance to moisture, fungus and weathering
- Suitable for underwater and underground application

Model	Cable Outer Dia Range (in mm)	PCN	List Price (INR) Per Nos.
Cable End Caps	4-8	**DBA0060309**	**100**
	8-17	**DBA0060269**	**150**
	15-30	**DBA0060226**	**200**
	25-50	**DBA0060289**	**300**
	35-70	**DBA0060147**	**500**
	45-95	**DBA0060148**	**650**
	70-105	**DBA0060149**	**750**
	90-150	**DBA0060531**	**1600**
	130-220	**DBA0060532**	**1850**

Raychem RPG



Prevent accidents, Ensure safety -

Trust our Insulating Covers for high voltage connections



Tried & Tested solutions for extreme field conditions

Raysulate

Electrical Insulation Enhancement Solution

Bus / Bushing Connection Insulating Covers - BCIC

- Designed to protect energized conductors or busbars from flashovers due to contact with birds, squirrels, and other wildlife. BCIC parts are made from a UV-stable, track-resistant, high-performance material to ensure years of reliable service in the harshest environments
- A variety of different shapes and sizes are available to cover circuit breaker bushings, bus standoff insulators, capacitors, transformer bushings, voltage regulators, potential transformers, and more. Installation can be made quickly in the field by trimming the entry and exit holes to the required dimensions
- The BCIC covers can be reentered for other maintenance needs and then reused, Thus lowering overall lifetime costs

Why wait? Contact us now.

Follow us on:

SURGE ARRESTERS & ACCESSORIES

Indoor Distribution High Class (DH) - Class 1 - Model **DA1**



- Conforms to IEC 60099-4
- Range from 3kV to 15kV
- Distribution High Class (DH) (Class 1)
- Low residual Voltage
- Safe non-shattering short circuit behavior to higher current levels
- Direct moulded housing to prevent moisture ingress
- Hydrophobic silicone housing (Tracking and erosion resistant)
- Excellent cantilever and tensile performance

System Voltage	Rating	LD Class	Model	PCN	List Price (INR)
3.3 kV	4kV, 10kA	Distribution High (DH) (Class 1)	DA1 (Housing A - 147mm creepage)	**AJA1010380**	**4700**
6.6 kV	6kV, 10kA			**AJA1010381**	**5360**
	7.2kV, 10kA			**AJA1010440**	**5460**
11 kV	10kV, 10kA			**AJA1010382**	**5880**
	12kV, 10kA			**AJA1010377**	**6400**
	15kV, 10kA		DA1(Housing B- 172mm creepage)	**AJA1010378**	**7240**

Indoor Station Low Class (SL) - Class 2 - MODEL **MCPA2**



- Conforms to IEC 60099-4
- Range from 3kV to 15kV
- Station Low Class (SL) (Class 2)
- Low residual Voltage
- Safe non-shattering short circuit behavior to higher current levels
- Direct moulded housing to prevent moisture ingress
- Hydrophobic silicone housing (Tracking and erosion resistant
- Excellent cantilever and tensile performance

System Voltage	Rating	LD Class	Model	PCN	List Price (INR)
3.3 kV	3kV, 10kA	Station Low (SL) (Class 2)	MCPA2 (Housing A – 147mm creepage)	**AJA1010383**	**6030**
6.6 kV	6kV, 10kA			**AJA1010384**	**6270**
	7.2kV, 10kA			**AJA1010493**	**6360**
11 kV	9kV, 10kA			**AJA1010385**	**7260**
	12kV, 10kA			**AJA1010386**	**7650**
	15kV, 10kA		MCPA2 (Housing B- 172mm creepage)	**AJA1010387**	**10000**

SURGE ARRESTERS & ACCESSORIES

Indoor Station Medium Class (SM) - Class 3 - Model **PCA**



- Conforms to IEC 60099-4
- Range from 6kV to 36kV
- Station Medium Class (SM) (Class 3)
- Low residual Voltage
- Safe non-shattering short circuit behavior to higher current levels
- Direct moulded housing to prevent moisture ingress
- Hydrophobic silicone housing (Tracking and erosion resistant)
- Excellent cantilever and tensile performance

System Voltage	Rating	LD Class	Model	PCN	List Price (INR)
6.6 kV	6kV, 10kA	Station Medium (SM) (Class 3)	PCA (Housing 0 - 208mm creepage)	**AJA1090142**	**19110**
11 kV	9kV, 10kA			**AJA1090143**	**20490**
	12kV, 10kA			**AJA1090144**	**22450**
	15kV, 10kA		PCA (Housing 1 - 377mm creepage)	**AJA1090145**	**25410**
22 kV	18kV, 10kA			**AJA1090146**	**31750**
33 kV	30kV, 10kA			**AJA1090150**	**25750**
	36kV, 10kA			**AJA1090152**	**36250**

Note: all indoor station class surge arrester models are without bracket and disconnector.

Outdoor Distribution High Class (DH) - Class 1 - Model **DOV**



- Conforms to IEC 60099-4
- Range from 3kV to 36kV
- Distribution High Class (DH) (Class 1)
- Low residual Voltage
- Safe non-shattering short circuit behavior to higher current levels
- Direct moulded housing to prevent moisture ingress
- Hydrophobic silicone housing (Tracking and erosion resistant)
- Excellent cantilever and tensile performance

System Voltage	Rating	LD Class	Model	Surge Arrester PCN	List Price (INR)	Surge Arrester with Bracket PCN	List Price (INR)	Surge Arrester with Bracket and disconnector PCN	List Price (INR)
11 kV	9kV, 10kA	Class DH	DOV (Housing type A - 405 mm creepage)	**AJA1100206**	**6880**	**AJA1100240**	**8490**	**AJA1100241**	**9200**
	12kV, 10kA			**AJA1100207**	**7660**	**AJA1100192**	**8730**	**AJA1100198**	**10630**
	15kV, 10kA			**AJA1100242**	**10060**	**AJA1100243**	**9860**	**AJA1100244**	**15530**
22 kV	18kV, 10kA		DOV (Housing type B - 697 mm creepage)	**AJA1100208**	**12680**	**AJA1100245**	**14200**	**AJA1100246**	**15360**
33 kV	30kV, 10kA		DOV (Housing type D - 945 mm creepage)	**AJA1100209**	**16070**	**AJA1100247**	**18660**	**AJA1100248**	**21070**
	36kV, 10kA		DOV (Housing type E - 1128 mm creepage)	**AJA1100249**	**19370**	**AJA1100250**	**21390**	**AJA1100199**	**22110**

SURGE ARRESTERS & ACCESSORIES

Outdoor Station Low Class (SL) - Class 2 - Model **OCP2**



- Conforms to IEC 60099-4
- Range from 6kV to 45kV
- Station Low Class (SL) (Class 2)
- Low residual Voltage
- Safe non-shattering short circuit behavior to higher current levels
- Direct moulded housing to prevent moisture ingress
- Hydrophobic silicone housing (Tracking and erosion resistant)
- Cage Construction: Excellent cantilever and tensile performance

System Voltage	Rating	LD Class	Model	Surge Arrester PCN	List Price (INR)	Surge Arrester with Bracket PCN	List Price (INR)	Surge Arrester with Bracket and disconnector PCN	List Price (INR)
11 kV	10kV, 10kA	Station Low (SL) (Class 2)	OCP2 (Housing type S- 380mm creepage)	**AJA1050357**	**8400**	**AJA1050412**	**12860**	**AJA1050390**	**13840**
22 kV	18kV, 10kA		OCP2 (Housing type L- 758mm creepage)	**AJA1050422**	**15420**	**AJA1050600**	**17580**	**AJA1050742**	**18330**
33 kV	30kV, 10kA		OCP2 (Housing type L- 900mm creepage)	**AJA1050380**	**15410**	**AJA1050385**	**19500**	**AJA1050423**	**24850**
	36kV, 10kA		OCP2 (Housing type M- 970mm creepage)	**AJA1050402**	**21580**	**AJA1050586**	**26280**	**AJA1050403**	**27040**
	38.75kV, 10kA			**AJA1050621**	**25860**	**AJA1050514**	**27790**	**AJA1050743**	**28800**
	45kV, 10kA			**AJA1050537**	**28370**	**AJA1050447**	**30940**	**AJA1050744**	**31680**
	36kV, 10kA		OCP2 (Housing type ML- 1125mm creepage)	**AJA1050362**	**24950**	**AJA1050388**	**29320**	**AJA1050657**	**27170**

Outdoor Station Low Class (SL) - Class 2 - Model **PAA**



- Conforms to IEC 60099-4
- Range from 60kV to 216kV
- Station Low Class (SL) (Class 2)
- Low residual Voltage
- Safe non-shattering short circuit behavior to higher current levels
- Direct moulded housing to prevent moisture ingress
- Hydrophobic silicone housing (Tracking and erosion resistant)
- Cage Construction : Excellent cantilever and tensile performance

System Voltage	Rating	LD Class	Model	Terminal Type	Surge Arrester PCN	List Price (INR)	Remarks
66 kV	60kV, 10kA	Station Low (SL) (Class 2)	PAA11 (1940mm creepage)	Surge arrester with base and L5 terminal connector	**AJA1070192**	**62990**	SA with base and L5 terminal connector
110 kV	96kV, 10kA		PAA333 (3837mm creepage)		**AJA1070358**	**95020**	
132 kV	120kV, 10kA				**AJA1070332**	**117690**	

SURGE ARRESTERS & ACCESSORIES

Outdoor Distribution Medium Class (SM) - Class 3 - Model **PCA**



- Conforms to IEC 60099-4
- Range from 6kV to 216kV
- Station Low Class (SL) (Class 3)
- Low residual Voltage
- Safe non-shattering short circuit behavior to higher current levels
- Direct moulded housing to prevent moisture ingress
- Hydrophobic silicone housing (Tracking and erosion resistant)
- Cage Construction: Excellent cantilever and tensile performance

System Voltage	Rating	LD Class	Model	Terminal Type	Surge Arrester PCN	List Price (INR)	Remarks
11kV	9kV, 10kA	Station Medium (SM) (Class 3)	PCA1 (1100mm creepage)	Surge arrester with base and L2 terminal connector	**AJA1090107**	**45840**	SA with base and L2 terminal connector
33kV	30kV, 10kA			Surge arrester with base and L5 terminal connector	**AJA1090007**	**55790**	SA with base and L5 terminal connector
	36kV, 10kA				**AJA1090077**	**61590**	
66kV	60kV, 10kA		PCA2 (1815mm creepage)		**AJA1090012**	**97110**	
110kV	96kV,10kA		PCA2L2L (3730mm creepage)		**AJA1090031**	**220100**	
132kV	120kV,10kA				**AJA1090034**	**141330**	
220kV	198kV, 10kA		PCA2L2L2L1 (6695mm creepage)		**AJA1090037**	**275130**	
	216kV,10kA				**AJA1090040**	**359040**	

Outdoor Distribution Class - Model **PSO**



- Conforms to IEC 60099-4
- Range 3kV to 9kV 5kA, LD 75A, 1000µSec
- Direct moulded housing to prevent moisture ingress
- Hydrophobic silicone housing (Tracking and erosion resistant)
- Low residual Voltage

System Voltage	Rating	LD Class	Model	Surge Arrester PCN	List Price (INR)	Surge Arrester with Bracket PCN	List Price (INR)	Surge Arrester with Bracket and disconnector PCN	List Price (INR)
11kV	9 kV, 5kA	75A, 1000 µSec	PSO (DM) (300mm Creepage)	**AGA6000016**	**4650**	**AGA6000017**	**5650**	**AGA6000025**	**6360**

SURGE ARRESTERS & ACCESSORIES

Outdoor Distribution Medium Class (DM) - Model **DA0**



- Conforms to IEC 60099-4
- Range from 3kV to 18kV, LD 150A, 1000µSec, Distribution medium class
- Safe non-shattering short circuit behavior to higher current levels
- Direct moulded housing to prevent moisture ingress
- Hydrophobic silicone housing (Tracking and erosion resistant)
- Excellent cantilever and tensile performance

System Voltage	Rating	Model	LD Class	Surge Arrester PCN	List Price (INR)	Surge Arrester with Bracket PCN	List Price (INR)	Surge Arrester with Bracket and disconnector PCN	List Price (INR)
6.6 kV	6kV, 5kA	DA0 (320mm Creepage)	Distribution Medium (DM)	**AJA1010355**	**1600**	**AJA1010640**	**4150**	**AJA1010641**	**4490**
11 kV	9kV, 5kA			**AJA1010411**	**3230**	**AJA1010356**	**4270**	**AJA1010350**	**4620**
	12kV, 5kA			**AJA1010428**	**4450**	**AJA1010401**	**5150**	**AJA1010642**	**5460**

Surge Counter **SC12**



- No auxiliary supply required
- Weather proof sealed model
- High degree of resistance to corrosion

Surge Monitor **SC13**



- No auxiliary supply require
- Weather proof sealed model
- High degree of resistance to corrosion
- Leakage measurement scale for leakage current

Surge Monitor **SC13AC**



- No auxiliary supply required
- Weather proof sealed model
- High degree of resistance to corrosion
- Leakage measurement scale for leakage current
- With NO/NC contact

Surge Monitor **SC003**



- No auxiliary supply required
- Weather proof sealed model
- High degree of resistance to corrosion

Description	PCN	List Price (INR)
SC003 Surge Counter with Leakage current Indicator (0-5mA)	**LBG0010018**	**18870**
SC12 Surge Counter	**LBG0010004**	**35150**
SC13 Surge Counter with Leakage current Indicator (0-30mA)	**LBG0010005**	**54230**
SC13/AC Surge Counter with Leakage current Indicator and with auxiliary contact	**LBG0010006**	**66140**

Raychem RPG

First Indian manufacturer to have **E3, C3, F1** certifications, for Cast Resin Transformers

» Our specialized offering



Cast Resin Dry Type Transformers
(upto 20 MVA, 33kV Class)

Oil Filled Transformers
(upto 50 MVA, 145kV Class)

Vacuum Pressure Impregnated Dry Type Transformers
(upto 15 MVA, 17.5kV Class)

Powering India **with specialized transformers**

Why wait? Contact us now.

Follow us on:

CABLE ACCESSORIES



LOW VOLTAGE CABLE ACCESSORIES

Heat Shrinkable Termination Kit

Indoor / Outdoor 1.1 kV Termination Kit - Model **EPKT**

- Conforms to - Generally as per IS 13573-1
- Suitable for voltage upto 1.1 kV, cable range of 4 - 630 Sq. mm.
- Suitable for PVC/XLPE Power Cables
- Built-in Tin plated Cu earthing braid
- Connector Type - Al Crimp
- Sleeve type : Tubular
- Core Sleeve - Optional (reqd for outdoor purpose) - To be ordered separately



Model	Cable Size (in sq. mm)	Termination Type	For 3.5 Core Cable		For 4 Core Cable	
			PCN	List Price (INR) Per Unit	PCN	List Price (INR) Per Unit
EPKT	4	Indoor/ Outdoor Termination	-	-	AAA4108004	2500
	6		AAA4109001	2450	AAA4109003	2500
	10		AAA4111001	2450	AAA4111003	2500
	16		AAA4113001	2450	AAA4113005	2500
	25		AAA4115003	3350	AAA4115008	3400
	35		AAA4117002	3350	AAA4117006	3400
	50		AAA4119001	3400	AAA4119005	3400
	70		AAA4121003	3550	AAA4121006	3500
	95		AAA4123001	3650	AAA4123005	3700
	120		AAA4125003	3650	AAA4125008	3800
	150		AAA4127001	3750	AAA4127006	3850
	185		AAA4129002	5350	AAA4129008	5550
	240		AAA4133002	5400	AAA4133015	5750
	300		AAA4135002	5750	AAA4135013	6000
	400		AAA4137003	6700	AAA4137011	7050
	500		AAA4139002	9900	AAA4139004	11150
	630		AAA4141004	9950	AAA4141008	11250

LOW VOLTAGE CABLE ACCESSORIES

Heat Shrinkable Termination Kit

Indoor / Outdoor 1.1 kV Termination Kit - Model **SFKT**

- Conforms to - Generally as per IS 13573-1
- Suitable for voltage upto 1.1 kV, cable range of 4 - 630 Sq. mm.
- Suitable for PVC/XLPE Power Cables
- Built-in Tin plated Cu earthing braid
- Connector Type - Al Crimp
- Sleeve type : Tubular
- Core Sleeve - Optional (reqd for outdoor purpose) - To be ordered out separately




Model	Cable Size (in sq. mm)	Termination Type	For 3.5 Core Cable		For 4 Core Cable	
			PCN	List Price (INR) Per Unit	PCN	List Price (INR) Per Unit
SFKT	4	Indoor/ Outdoor Termination	-	-	-	-
	6		-	-	-	-
	10		-	-	AAA4111007	1500
	16		AAA4113024	1000	AAA4113023	1500
	25		AAA4115015	2050	AAA4115013	2250
	35		AAA4117012	2150	AAA4117013	2250
	50		AAA4119016	2250	AAA6119002	2350
	70		AAA4121014	2300	AAA6121008	2350
	95		AAA4123012	2300	AAA4123013	2350
	120		AAA4125016	2400	AAA4125017	2350
	150		AAA4127012	2400	AAA4127015	2450
	185		AAA4129015	3100	AAA4129016	3200
	240		AAA4133025	3250	AAA4133026	3300
	300		AAA4135022	3550	AAA4135023	3700
	400		AAA4137019	4000	AAA4137015	3750
	500		AAA4139006	7050	AAA4139007	8150
	630		AAA4141006	7300	AAA4141007	8900

LOW VOLTAGE CABLE ACCESSORIES

Cold Applied (Insulation) Joint Kit

Straight Through Joint - Model **RLVJ**

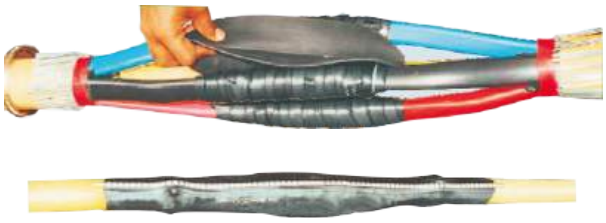

- RLVJ kit comes with Cold Applied unique mastic coated insulating tape and Heat Shrinkable wraparound sleeve
- Suitable for voltage upto 1.1 kV, Seven sizes cover wide range of cable from 6-400 Sq. mm.
- Conforms to IS 13573-1 / EN 50393
- Suitable for XLPE / PVC Power Cables
- Connector Type - Al Crimp

Model	Earthing Braid Material	Aluminum		Tin plated Copper		Aluminum		Tin plated Copper	
	No. of Cable Core	3.5 Core				4 Core			
	Cable Size (in sq. mm)	PCN	List Price (INR) Per Unit	PCN	List Price (INR) Per Unit	PCN	List Price (INR) Per Unit	PCN	List Price (INR) Per Unit
RLVJ	6	AAA2109024	3300	-	-	AAA2109023	3500	AAA2109013	4300
	10	AAA2111025	3550	AAA2111008	3800	AAA2111026	3700	AAA2111012	4450
	16	AAA2113130	3550	AAA2113022	3900	AAA2113122	3800	AAA2113026	4650
	25	AAA2115077	3800	AAA2115025	4450	AAA2115079	4000	AAA2115031	4850
	35	AAA2117062	3850	AAA2117031	4550	AAA2117061	4000	AAA2117035	4900
	50	AAA2119058	3900	AAA2119024	4600	AAA2121067	4050	AAA2119030	5000
	70	AAA2121068	5300	AAA2121025	6100	AAA2121070	4450	AAA2121030	6850
	95	AAA2123049	5450	AAA2123022	6850	AAA2123056	6000	AAA2123030	6850
	120	AAA2125073	7450	AAA2125029	8850	AAA2125075	9000	AAA2125034	9150
	150	AAA2127070	7600	AAA2127025	9600	AAA2127071	9050	AAA2127029	10000
	185	AAA2129041	7700	AAA2129018	9700	AAA2129049	9150	AAA2129023	10150
	240	AAA2133062	8050	AAA2133024	9700	AAA2133064	10350	AAA2133029	10450
	300	AAA2135078	9350	AAA2135029	11500	AAA2135080	11200	AAA2135036	11650
	400	AAA2137043	12900	AAA2137021	16200	AAA2137049	16150	AAA2137025	16400

Note : For 1 and 3 core kit please contact the nearest regional office

LOW VOLTAGE CABLE ACCESSORIES

Cold Applied (Insulation) Joint Kit

Patent Pending

Straight Through Joint - Model **LVC** NEW





- Kit comes with Cold Applied unique mastic coated insulating tape and cold applied armour cast tape
- Suitable for voltage upto 1.1kV, Several sizes cover wide range of cable from 6-400 Sq.mm.
- Conforms to IS13573-1 / EN 50393
- Suitable for XLPE / PVC Power Cable
- Connector Type- Al Crimp
- Aluminium Earth braid

Model	Earthing Braid Material	Aluminum		Aluminum	
	No. of Cable Core	3.5 Core		4 Core	
	Cable Size (in sq. mm)	PCN	List Price (INR) Per Unit	PCN	List Price (INR) Per Unit
LVC	6	EPALVM1002	2350	EPALVM1016	2550
	10	EPALVM1003	2350	EPALVM1017	2550
	16	EPALVM1004	2350	EPALVM1018	2550
	25	EPALVM1005	2350	EPALVM1019	2550
	35	EPALVM1006	3250	EPALVM1020	3650
	50	EPALVM1007	4050	EPALVM1021	4450
	70	EPALVM1008	4850	EPALVM1022	5200
	95	EPALVM1009	4950	EPALVM1023	5300
	120	EPALVM1010	5000	EPALVM1024	5350
	150	EPALVM1011	5050	EPALVM1025	5500
	185	EPALVM1012	5200	EPALVM1026	5550
	240	EPALVM1013	5200	EPALVM1027	5600
	300	EPALVM1014	6100	EPALVM1028	6550
	400	EPALVM1015	7950	EPALVM1029	8300

Note : For 1 and 3 core kit please contact the nearest regional office

LOW VOLTAGE CABLE ACCESSORIES

Heat Shrinkable Joint Kit

Straight Through Joint - Model **EPKJ**



- Conforms to IS 13573-1 / EN 50393
- Suitable for voltage upto 1.1 kV, cable range of 2.5 - 630 Sq. mm.
- Suitable for XLPE / PVC Power Cables
- Built-in Tin plated Cu earthing braid
- Connector Type - Al Crimp
- Sleeve type: Tubular

Model	No. of Cable Core	3.5 Core		4 Core	
	Cable Size (in sq. mm)	PCN	List Price (INR) Per Unit	PCN	List Price (INR) Per Unit
EPKJ	2.5	AAA2105006	2100	AAA2106082	2850
	4	AAA2108013	2100	AAA2108016	3250
	6	AAA2109006	2150	AAA2110012	3750
	10	AAA2112013	5000	AAA2112017	5250
	16	AAA2113006	5350	AAA2113011	5700
	25	AAA2115004	9650	AAA2115007	10000
	35	AAA2117004	10750	AAA2117007	11050
	50	AAA2119002	11150	AAA2119005	11500
	70	AAA2121004	14800	AAA2121006	15300
	95	AAA2123002	15000	AAA2123004	15500
	120	AAA2125004	15450	AAA2125006	15800
	150	AAA2127004	15600	AAA2127006	15950
	185	AAA2129004	24450	AAA2129007	26200
	240	AAA2133004	28500	AAA2133008	27500
	300	AAA2135005	28850	AAA2135009	29700
	400	AAA2137005	29500	AAA2137007	30400
	500	-	-	AAA2139006	30800
	630	AAA2441005	31850	-	-

Note: For1, 2 & 3 core kit please contact the nearest regional office

Straight Through Joint - Model **SFKJ**



- Conforms to IS 13573-1 / EN 50393
- Suitable for voltage upto 1.1 kV, cable range of 4 - 500 Sq. mm.
- Suitable for XLPE / PVC Power Cables
- Built-in Al earthing braid
- Connector Type - Al Crimp
- Sleeve type: Tubular

Model	No. of Cable Core	3.5 Core		4 Core	
	Cable Size (in sq. mm)	PCN	List Price (INR) Per Unit	PCN	List Price (INR) Per Unit
SFKJ	4	-	-	AAA2107009	900
	6	-	-	AAA2109032	950
	10	-	-	AAA2111033	1450
	16	AAA2113124	1200	AAA2113141	1500
	25	AAA2115091	1550	AAA2115090	1950
	35	AAA2117075	2650	AAA2117074	3000
	50	AAA2119069	3300	AAA2119068	3650
	70	AAA2121081	4000	AAA1121007	4300
	95	AAA2123068	4050	AAA2123067	4350
	120	AAA2125087	4100	AAA2125086	4400
	150	AAA1127011	4150	AAA2127088	4550
	185	AAA2129062	4250	AAA1129006	4550
	240	AAA2133079	4300	AAA2133078	4600
	300	AAA2135102	4300	AAA2135101	4650
	400	AAA2137056	5600	AAA2137055	5900
	500	AAA2139009	8300	AAA2139008	9250

Note: For1, 2 & 3 core kit please contact the nearest regional office

Raychem RPG







Ensure your network reliability with smart Rayvolve RVSJ kits

Applications

- **Direct burial** distribution network applications
- Connections to **secondary network protection devices**
- Joint covers for connections in **street lighting circuits**
- Cable connection for **overhead bundled cable**

Performance

- Suitable for voltage upto 1.1 kV, cable from 25-400 Sq. mm.
- Conforms to EN 50393
- Suitable for XLPE / PVC Power Cables
- Available in Connector Type - Al Crimp or Al Mechanical
- Sleeve type : Armour cast tape

Convenience - Easy, Tool-free installation

- Thanks to the smart dual-wall design with an entrapped lubricant, making installation without any special tools
- Hassle free installation without need of gas or electric heating devices
- The Rayvolve sleeve rolls quickly and easily onto the cable. No more need of time-consuming taping

Reliable & Repeatable

- The gripping force of the specially formulated EPDM elastomer combines with a high-performance sealant to form a reliable, water & dirt resistant, insulating sleeve.
- The pre-engineered wall thickness of the Rayvolve sleeve assures consistent field installations. Compared to conventional tape, where insulation is dependent on The number of layers applied



Model	Connector Type	Al Mechanical			
	No. of Cable Core	3.5 Core		4 Core	
	Cable Size (in sq. mm)	PCN	List Price (INR) Per Unit	PCN	List Price (INR) Per Unit
RVSJ-M1	25	-	-	AAA2115099	12900
RVSJ-M2	35	-	-	AAA2121087	14700
	50-70	AAA2121088	14700		
RVSJ-M3	95-150	AAA2127100	17550	AAA2127099	17750
RVSJ-M4	185-300	AAA2135115	29550	AAA2135114	32450

Model	Connector Type	Al Crimp			
	No. of Cable Core	3.5 Core		4 Core	
	Cable Size (in sq. mm)	PCN	List Price (INR) Per Unit	PCN	List Price (INR) Per Unit
RVSJ-C1	25	-	-	AAA2115097	8150
RVSJ-C2	35	-	-	AAA2117076	9700
	50	AAA2119074	9900	AAA2119073	9950
RVSJ-C3	70	AAA2121086	10900	AAA2121085	11050
	95	AAA2123073	11150	AAA2123072	11350
RVSJ-C4	120	AAA2125091	12150	AAA2125090	12200
	150	AAA2127098	13050	AAA2127097	13200
	185	AAA2129064	13750	AAA2129063	13850
RVSJ-C5	240	AAA2133082	15600	AAA2133081	15650
	300	AAA2135113	16500	AAA2135112	16600
RVSJ-C6	400	AAA2137059	16950	AAA2137058	17150

Note: For 1 and 3 core kit please contact the nearest regional office

Easy, "roll-on" way to insulate and seal cable connections up to 1.1kV

Follow us on:

LOW VOLTAGE CABLE ACCESSORIES

Heat Shrinkable Joint Kit

Straight Through Joint - Model **ECKJ**



- Conforms to IS 13573-1 / EN 50393
- Suitable for voltage upto 1.1 kV, cable range of 1.5 & 2.5 Sq. mm
- Suitable for Multicore Control Cables
- Built-in tin plated Cu earthing braid
- Connector Type - Cu Crimp
- Sleeve type: Tubular

Model	Cable Size (in sq. mm)	1.5 sq. mm		2.5 sq. mm	
	No. of Cable Core	PCN	List Price (INR) Per Unit	PCN	List Price (INR) Per Unit
ECKJ	2	AAA2104001	4700	AAA2106012	4750
	3	AAA2104003	4850	AAA2106014	4850
	4	AAA2104005	4900	AAA2106016	4950
	5	AAA2104008	5000	AAA2106018	5000
	6	AAA2104011	5050	AAA2106022	5100
	7	AAA2104012	5050	AAA2106023	5100
	8	AAA2104023	5200	AAA2106030	5250
	9	-	-	AAA2106031	5300
	10	AAA2104015	5350	AAA2106024	5400
	12	AAA2104017	5600	AAA2106026	5700
	14	AAA2104020	5800	AAA2106027	5850
	16	AAA2104068	8150	AAA2106032	8150
	19	AAA2104025	8400	AAA2106035	8400
	20	-	-	AAA2106037	8750
	21	AAA2104028	9050	AAA2106038	9050
	24	AAA2104029	9150	AAA2106040	9150
	27	AAA2104030	9450	AAA2106044	9500
	30	AAA2104032	9800	AAA2106045	9850
	32	-	-	AAA2106046	10250
	37	AAA2104035	10700	AAA2106047	10750
	40	AAA2103010	11150	AAA2106048	11150
	48	AAA2104038	12700	-	-
	50	-	-	AAA2106051	13450
	61	AAA2104041	14150	-	-
	75	AAA2104043	14800	AAA2106052	14850

MEDIUM VOLTAGE CABLE ACCESSORIES

Heat Shrinkable Termination Kit

Indoor/Outdoor 11kV Termination Kit - Model **EPKT-S & EPKT-C**



- Conforms to IS 13573-2
- Suitable for voltage upto 11 kV cable range of 35 - 1000 Sq. mm.
- Suitable for XLPE Power Cables
- Built-in Tin plated Cu earthing braid
- Connector Type - Al Crimp
- Sleeve Type: Tubular

Model		EPKT-S				EPKT-C			
		For 1 Core Cable		For 3 Core Cable		For 1 Core Cable		For 3 Core Cable	
Cable Size (in sq. mm)	Termination Type	PCN	List Price (INR) Per Unit	PCN	List Price (INR) Per Unit	PCN	List Price (INR) Per Unit	PCN	List Price (INR) Per Unit
35	Indoor Termination	AAA3417018	4250	AAA4417048	12000	AAA3417017	3700	AAA4417047	11700
50		AAA3419013	4300	AAA4419050	12500	AAA3419012	3700	AAA4419047	11750
70		AAA4421056	4550	AAA4421055	12650	AAA3421013	3750	AAA4421054	11950
95		AAA3423021	4750	AAA4423083	12900	AAA3423020	3950	AAA4423082	12250
120		AAA3425020	4850	AAA4425086	13900	AAA3425019	4000	AAA4425085	12850
150		AAA3427020	4900	AAA4427077	14100	AAA3427019	4100	AAA4427076	13050
185		AAA3429020	5200	AAA4429134	15750	AAA3429019	4200	AAA4429133	13400
240		AAA3433027	5650	AAA4433129	16600	AAA3433026	4550	AAA4433128	13950
300		AAA3435028	5750	AAA4435155	17150	AAA3435027	5000	AAA4435153	14800
400		AAA3437032	6300	AAA4437090	19150	AAA3437031	5350	AAA4437088	17400
500		AAA3439029	6700	-	-	AAA3439028	6000	-	-
630		AAA3441049	8600	-	-	AAA3441048	7100	-	-
800		AAA3443013	9050	-	-	AAA3443012	7800	-	-
1000		AAA3445034	10150	-	-	AAA3445033	9450	-	-
35	Outdoor Termination	AAA5417009	5550	AAA6417053	17050	AAA5417008	5250	AAA6417052	17050
50		AAA5419013	6850	AAA6419043	21600	AAA5419012	5300	AAA6419042	17200
70		AAA5421013	7150	AAA6421046	21650	AAA5421012	5300	AAA6421045	17250
95		AAA5423029	7400	AAA6423076	22000	AAA5423028	5550	AAA6423075	18250
120		AAA5425023	7450	AAA6425079	23000	AAA5425022	5600	AAA6425078	18250
150		AAA5427017	7550	AAA6427060	23150	AAA5427016	5600	AAA6427059	18400
185		AAA5443004	7600	AAA6429093	24650	AAA5429014	5750	AAA6429092	18750
240		AAA5433017	8000	AAA6433085	25500	AAA5433016	6400	AAA6433084	20200
300		AAA5435012	8200	AAA6435119	26000	AAA5435011	6750	AAA6435117	21050
400		AAA5437011	8750	AAA6437059	28050	AAA5437010	7200	AAA6437058	24150
500		AAA5439009	8800	-	-	AAA5439008	7600	-	-
630		AAA5441015	10800	-	-	AAA5441014	8750	-	-
800		AAA5443005	12350	-	-	AAA5443003	9900	-	-
1000		AAA5445017	13150	-	-	AAA5445016	11550	-	-

MEDIUM VOLTAGE CABLE ACCESSORIES

Heat Shrinkable Termination Kit

Indoor/Outdoor 11kV Termination Kit - Model **EPKT-C-CU**



- Conforms to IS 13573-2
- Suitable for voltage upto 11 kV, cable range of 35 - 1000 Sq. mm.
- Suitable for XLPE Power Cables
- Built-in Tin plated Cu earthing braid
- Connector Type - Cu Crimp
- Sleeve type: Tubular

Model		EPKT-C-CU			
		For 1 Core Cable		For 3 Core Cable	
Cable Size (in sq. mm)	Termination Type	PCN	List Price (INR) Per Unit	PCN	List Price (INR) Per Unit
35	Indoor Termination	AAA3418008	3800	AAA4418031	8850
50		AAA3420007	3850	AAA4420026	12100
70		AAA3422008	4000	AAA4422025	12500
95		AAA3424009	4400	AAA4424039	13700
120		AAA3426010	4700	AAA4426027	14400
150		AAA3428011	5200	AAA4428026	14750
185		AAA3430019	5300	AAA4430040	16900
240		AAA3434015	6650	AAA4434035	21950
300		AAA3436017	6850	AAA4436021	22650
400		AAA3438019	9050	AAA4438015	28750
500		AAA3440019	10750	-	-
630		AAA3442017	13050	-	-
800		AAA3444006	18700	-	-
1000		AAA3446005	28050	-	-
35	Outdoor Termination	AAA5418002	5350	AAA6418009	17150
50		AAA5420001	5450	AAA6420015	17500
70		AAA5422003	5650	AAA6422012	17950
95		AAA5424006	6000	AAA6424018	19150
120		AAA5426003	6300	AAA6426005	20450
150		AAA5428005	6850	AAA6428013	22100
185		AAA5430006	6950	AAA6430022	22350
240		AAA5434008	9150	AAA6434016	28600
300		AAA5436008	10000	AAA6436010	29100
400		AAA5438006	11150	AAA6438008	35850
500		AAA5440014	12450	-	-
630		AAA5442009	15900	-	-
800		AAA5444003	21000	-	-
1000		AAA5446001	30350	-	-

MEDIUM VOLTAGE CABLE ACCESSORIES

Heat Shrinkable Termination Kit

Indoor/Outdoor 11kV Termination Kit - Model **HVT-M**



- Conforms to IS 13573-2
- Suitable for voltage upto 11 kV, cable range of 35 - 1000 Sq. mm.
- Suitable for XLPE Power Cables
- Built-in Tin plated Cu earthing braid
- Connector Type - Al Crimp
- Sleeve type: Tubular

Indoor/Outdoor 11kV Termination Kit - Model **HST**



- Conforms to IS 13573-2
- Suitable for voltage upto 11 kV, cable range of 35 - 1000 Sq. mm.
- Suitable for XLPE Power Cables
- Built-in Tin plated Cu earthing braid
- Connector Type - Al Crimp
- Sleeve type: Tubular

Model		HVT-M				HST			
		For 1 Core Cable		For 3 Core Cable		For 1 Core Cable		For 3 Core Cable	
Cable Size (in sq. mm)	Termination Type	PCN	List Price (INR) Per Unit	PCN	List Price (INR) Per Unit	PCN	List Price (INR) Per Unit	PCN	List Price (INR) Per Unit
35	Indoor Termination	AAA3417019	3150	AAA4417049	8700	AAA3417020	2150	AAA4417054	5950
50		AAA3419014	3250	AAA4419051	8800	AAA3419016	2250	AAA4419054	6400
70		AAA3421015	3250	AAA4421057	8900	AAA3421016	2300	AAA4421059	6450
95		AAA3423022	3350	AAA4423084	9000	AAA3423024	2400	AAA4423093	6550
120		AAA3425021	3400	AAA4425087	9050	AAA3425022	2450	AAA4425096	6600
150		AAA3427021	3500	AAA4427078	9650	AAA3427022	2500	AAA4427083	6800
185		AAA3429021	3650	AAA4429135	9750	AAA3429024	2650	AAA4429145	6950
240		AAA3433028	4200	AAA4433130	9850	AAA3433030	2750	AAA4433137	7050
300		AAA3435029	4250	AAA4435156	10800	AAA3435030	3050	AAA4435171	7500
400		AAA3437033	4600	AAA4437091	13050	AAA3437034	3400	AAA4437098	8950
500		AAA3439030	5250	-	-	AAA3439036	3800	-	-
630		AAA3441051	6050	-	-	AAA3441057	4500	-	-
800		AAA3443014	6600	-	-	AAA3443018	4900	-	-
1000		AAA3445035	8300	-	-	AAA3445038	6400	-	-
35	Outdoor Termination	AAA5417010	4100	AAA6417054	11500	AAA5417012	2850	AAA6417058	8050
50		AAA5419014	4200	AAA6419044	11650	AAA5419016	3000	AAA6419047	8200
70		AAA5421014	4250	AAA6421047	11900	AAA5421016	3050	AAA6421049	8450
95		AAA5423030	4300	AAA6423077	12000	AAA5423033	3200	AAA6423083	8950
120		AAA5425024	4350	AAA6425080	12250	AAA5425026	3250	AAA6425083	9000
150		AAA5427018	4500	AAA6427061	12500	AAA5427021	3300	AAA6427065	9200
185		AAA5429015	4600	AAA6429094	13200	AAA5429018	3450	AAA6429097	9250
240		AAA5433018	5450	AAA6433086	13800	AAA5433019	3600	AAA6433090	9300
300		AAA5435013	5500	AAA6435120	14800	AAA5435015	3800	AAA6435127	9850
400		AAA5437012	5700	AAA6437060	16650	AAA5437013	3950	AAA6437064	11250
500		AAA5439010	6300	-	-	AAA5439015	4700	-	-
630		AAA5441016	7250	-	-	AAA5441018	5300	-	-
800		AAA5443006	7950	-	-	AAA5443008	6000	-	-
1000		AAA5445018	9700	-	-	AAA5445020	7550	-	-

MEDIUM VOLTAGE CABLE ACCESSORIES

Heat Shrinkable Termination Kit

Indoor / Outdoor 22kV Termination Kit - Model **EPKT-S & EPKT-C**



- Conforms to IS 13573-2
- Suitable for voltage upto 22 kV, cable range of 35 - 1000 Sq. mm.
- Suitable for XLPE Power Cables
- Built-in Tin plated Cu earthing braid
- Connector Type - Al Crimp
- Sleeve type: Tubular
- Indoor & Outdoor both versions come with rain skirts

Model		EPKT-S				EPKT-C			
		For 1 Core Cable		For 3 Core Cable		For 1 Core Cable		For 3 Core Cable	
Cable Size (in sq. mm)	Termination Type	PCN	List Price (INR) Per Unit	PCN	List Price (INR) Per Unit	PCN	List Price (INR) Per Unit	PCN	List Price (INR) Per Unit
35	Indoor Termination	AAA3617009	5700	AAA4617012	17300	AAA3617010	4750	AAA4617013	15500
50		AAA3619007	5700	AAA4619017	17400	AAA3619009	4750	AAA4619018	15500
70		AAA3621010	5750	AAA4621017	18150	AAA3621011	4850	AAA4621018	16300
95		AAA3623014	6000	AAA4623038	18300	AAA3623015	5000	AAA4623039	16450
120		AAA3625013	6300	AAA4625033	20600	AAA3625014	5250	AAA4625034	17250
150		AAA3627012	6400	AAA4627023	21050	AAA3627013	5600	AAA4627024	19150
185		AAA3629013	6500	AAA4629035	21400	AAA3629015	5650	AAA4629036	19600
240		AAA3633021	6700	AAA4633037	23600	AAA3633022	5850	AAA4633038	20500
300		AAA3635028	6800	AAA4635059	24250	AAA3635029	5950	AAA4635060	21250
400		AAA3637025	7850	AAA4637031	25650	AAA3637026	6450	AAA4637032	22450
500		AAA3639017	9000	-	-	AAA3639018	7450	-	-
630		AAA3641027	10200	-	-	AAA3641028	8600	-	-
800		AAA3643010	10700	-	-	AAA3643011	9300	-	-
1000		AAA3645013	13250	-	-	AAA3645014	11700	-	-
35	Outdoor Termination	AAA5617003	8000	AAA6617010	25550	AAA5617004	5800	AAA5617002	19900
50		AAA5619003	8100	AAA6619014	25650	AAA5619004	5900	AAA6619015	19950
70		AAA5621004	8150	AAA6621018	25750	AAA5621005	5950	AAA6621019	20750
95		AAA5623006	8450	AAA6623026	25950	AAA5623007	6300	AAA6623027	20900
120		AAA5625006	8800	AAA6625024	28600	AAA5625007	7000	AAA6625025	22550
150		AAA5627004	8900	AAA6627019	29000	AAA5627005	7050	AAA6627020	24800
185		AAA3629014	9100	AAA6629032	29400	AAA5629003	7150	AAA6629033	25250
240		AAA5633006	9250	AAA6633026	31700	AAA5633007	7400	AAA6633027	26850
300		AAA5635006	9350	AAA6635040	31750	AAA5635007	7450	AAA6635041	26900
400		AAA5637005	10200	AAA6637023	32650	AAA5637006	8150	AAA6637024	27150
500		AAA5639007	12500	-	-	AAA5639008	9250	-	-
630		AAA5641007	13700	-	-	AA5641008	10450	-	-
800		AAA5643003	14200	-	-	AAA5643004	11600	-	-
1000		AAA5645010	16650	-	-	AAA5645011	13450	-	-

MEDIUM VOLTAGE CABLE ACCESSORIES

Heat Shrinkable Termination Kit

Indoor / Outdoor 22kV Termination Kit - Model **EPKT-C-CU**



- Conforms to IS 13573-2
- Suitable for voltage upto 22 kV, cable range of 35 - 1000 Sq. mm.
- Suitable for XLPE Power Cables
- Built-in Tin plated Cu earthing braid
- Connector Type - Cu Crimp
- Sleeve type: Tubular

Model		EPKT-C-CU			
		For 1 Core Cable		For 3 Core Cable	
Cable Size (in sq. mm)	Termination Type	PCN	List Price (INR) Per Unit	PCN	List Price (INR) Per Unit
35	Indoor Termination	AAA3618003	4850	AAA4618005	15500
50		AAA3620006	4950	AAA4620005	15800
70		AAA3622007	5100	AAA4622010	17200
95		AAA3624009	5350	AAA4624009	17850
120		AAA3626006	6200	AAA4626012	19450
150		AAA3628008	6700	AAA4628008	22700
185		AAA3630011	6750	AAA4630016	23050
240		AAA3634007	8500	AAA4634014	29150
300		AAA3636008	8500	AAA4636021	30700
400		AAA3638012	8800	AAA4638006	33750
500		AAA3640008	12350	-	-
630		AAA3642010	15400	-	-
800		AAA3644003	20600	-	-
1000		AAA3646003	30350	-	-
35	Outdoor Termination	AAA5618001	5950	AAA6618003	19900
50		AAA5620002	6050	AAA6620006	20250
70		AAA5622001	6200	AAA6622005	21600
95		AAA5624005	6550	AAA6624008	22350
120		AAA5626002	7750	AAA6626007	25150
150		AAA5628003	8300	AAA6628007	28700
185		AAA5630006	8300	AAA6630003	29050
240		AAA5634002	9200	AAA6634007	35150
300		AAA3636009	10600	AAA6636008	37450
400		AAA5638006	11750	AAA6638003	38650
500		AAA5640005	14350	-	-
630		AAA5642003	17650	-	-
800		AAA5644001	22450	-	-
1000		AAA5646001	32150	-	-

MEDIUM VOLTAGE CABLE ACCESSORIES

Heat Shrinkable Termination Kit

Indoor / Outdoor 22kV Termination Kit - Model **HVT-M**



- Conforms to IS 13573-2
- Suitable for voltage upto 22 kV, cable range of 35 - 1000 Sq. mm.
- Suitable for XLPE Power Cables
- Built-in Tin plated Cu earthing braid
- Connector Type - Al Crimp
- Sleeve type: Tubular
- Indoor & Outdoor both versions come with rain skirts

Model		HVT-M			
		For 1 Core Cable		For 3 Core Cable	
Cable Size (in sq. mm)	Termination Type	PCN	List Price (INR) Per Unit	PCN	List Price (INR) Per Unit
35	Indoor Termination	AAA3617011	4200	AAA4617014	12850
50		AAA3619008	4250	AAA4619019	12900
70		AAA3621012	4300	AAA4621019	13300
95		AAA3623016	4800	AAA4623040	13400
120		AAA3625015	5250	AAA4625035	13450
150		AAA3627014	5250	AAA4627025	16300
185		AAA3629016	5350	AAA4629037	16700
240		AAA3633023	5500	AAA4633039	18050
300		AAA3635030	5550	AAA4635061	18150
400		AAA3637027	6450	AAA4637033	19250
500		AAA3639019	7050	-	-
630		AAA3641029	7900	-	-
800		AAA3643012	9150	-	-
1000		AAA3645015	11150	-	-
35	Outdoor Termination	AAA5617005	5600	AAA6617011	17650
50		AAA5619005	5650	AAA6619016	17650
70		AAA5621006	5700	AAA6621020	18050
95		AAA5623008	6300	AAA6623028	18200
120		AAA5625008	7000	AAA6625026	19950
150		AAA5627006	7050	AAA6627021	22450
185		AAA5629004	7150	AAA6629034	22800
240		AAA5633008	7350	AAA6633028	24200
300		AAA5635008	7400	AAA6635042	24300
400		AAA5637007	7900	AAA6637025	24350
500		AAA5639009	9050	-	-
630		AAA5641009	9900	-	-
800		AAA5643005	11250	-	-
1000		AAA5645012	13300	-	-

MEDIUM VOLTAGE CABLE ACCESSORIES

Heat Shrinkable Termination Kit

Indoor / Outdoor 33kV Termination Kit - Model **EPKT-S & EPKT-C**



- Conforms to IS 13573-2
- Suitable for voltage upto 33 kV, cable range of 35 - 1000 Sq. mm.
- Suitable for XLPE Power Cables
- Built-in Tin plated Cu earthing braid
- Connector Type - Al Crimp
- Sleeve type: Tubular
- Indoor & Outdoor both versions come with rain skirts

Model		EPKT-S				EPKT-C			
		For 1 Core Cable		For 3 Core Cable		For 1 Core Cable		For 3 Core Cable	
Cable Size (in sq. mm)	Termination Type	PCN	List Price (INR) Per Unit	PCN	List Price (INR) Per Unit	PCN	List Price (INR) Per Unit	PCN	List Price (INR) Per Unit
35	Indoor Termination	AAA3717006	7150	AAA4717009	22800	AAA3717007	5900	AAA4717010	18750
50		AAA3719012	7200	AAA4719017	24800	AAA3719013	6100	AAA4719018	19400
70		AAA3721010	7600	AAA4721013	25150	AAA3721011	6450	AAA4721014	20400
95		AAA3723022	7650	AAA4723024	25350	AAA3723023	6700	AAA4723025	22400
120		AAA3725015	7750	AAA4725023	26100	AAA3725016	6750	AAA4725024	23650
150		AAA3727015	7800	AAA4727020	26450	AAA3727016	6850	AAA4727021	23750
185		AAA3729026	7900	AAA4729031	26850	AAA3729027	6900	AAA4729032	24300
240		AAA3733029	8800	AAA4733036	28050	AAA3733030	7100	AAA4733037	24350
300		AAA3735041	9250	AAA4735065	31900	AAA3735042	7850	AAA4735066	28500
400		AAA3737035	10500	AAA4737105	34450	AAA3737036	8400	AAA4737106	29950
500		AAA3739031	11150	-	-	AAA3739032	9900	-	-
630		AAA3741048	13450	-	-	AAA3741049	12150	-	-
800		AAA3743015	13850	-	-	AAA3743016	12500	-	-
1000		AAA3745020	16050	-	-	AAA3745021	14250	-	-
35	Outdoor Termination	AAA5717005	10350	AAA6717015	34350	AAA5717006	7900	AAA6717016	24750
50		AAA5719012	10450	AAA6719011	36800	AAA5719013	8100	AAA6719012	25350
70		AAA5721008	10700	AAA6721013	36850	AAA5721009	8200	AAA6721014	27900
95		AAA5723014	10750	AAA6723022	37200	AAA5723015	8800	AAA6723023	29850
120		AAA5725018	10800	AAA6725017	38600	AAA5725019	8850	AAA6725018	30200
150		AAA5727013	10900	AAA6727017	38650	AAA5727014	8900	AAA6727018	30400
185		AAA5729023	10950	AAA6729029	39000	AAA5729024	8950	AAA6729030	30450
240		AAA5733019	11750	AAA6733032	39250	AAA5833012	9000	AAA6733033	30750
300		AAA5735025	14250	AAA6735055	46600	AAA5735026	10250	AAA6735056	34850
400		AAA5737025	14700	AAA6737120	49450	AAA5737026	11250	AAA6737121	37850
500		AAA5739022	15300	-	-	AAA5739023	12650	-	-
630		AAA5741029	17600	-	-	AAA5741030	14500	-	-
800		AAA5743010	17800	-	-	AAA5743011	14850	-	-
1000		AAA5745021	19900	-	-	AAA5745022	16650	-	-

MEDIUM VOLTAGE CABLE ACCESSORIES

Heat Shrinkable Termination Kit

Indoor / Outdoor 33kV Termination Kit - Model **EPKT-C-CU**



- Conforms to IS 13573-2
- Suitable for voltage upto 33 kV, cable range of 35 - 1000 Sq. mm.
- Suitable for XLPE Power Cables
- Built-in Tin plated Cu earthing braid
- Connector Type - Cu Crimp
- Sleeve type: Tubular

Model		EPKT-C-CU			
		For 1 Core Cable		For 3 Core Cable	
Cable Size (in sq. mm)	Termination Type	PCN	List Price (INR) Per Unit	PCN	List Price (INR) Per Unit
35	Indoor Termination	AAA3718001	5900	AAA4718003	19050
50		AAA3720004	6200	AAA4720006	19900
70		AAA3722004	6600	AAA4722008	22900
95		AAA3724008	7150	AAA4724019	24350
120		AAA3726012	7550	AAA4726008	26300
150		AAA3728006	8100	AAA4728004	27300
185		AAA3730015	8150	AAA4730012	27850
240		AAA3734030	9900	AAA4734014	32350
300		AAA3736015	10600	AAA4736020	37250
400		AAA3738027	12450	AAA4738015	42500
500		AAA3740014	14550	-	-
630		AAA3742021	18950	-	-
800		AAA3744006	23200	-	-
1000		AAA3746009	32700	-	-
35	Outdoor Termination	AAA5718002	7700	AAA6718004	25100
50		AAA5720005	8000	AAA6720007	25950
70		AAA5722004	8400	AAA6722010	29100
95		AAA5724005	9350	AAA6724014	31800
120		AAA5726011	9700	AAA6726004	34000
150		AAA5728003	10000	AAA6728004	35150
185		AAA5730011	10050	AAA6730008	37350
240		AAA5734023	11800	AAA6733038	38950
300		AAA5736012	13050	AAA6736011	45850
400		AAA5738015	14850	AAA6738013	51150
500		AAA5720006	17150	-	-
630		AAA5742017	21100	-	-
800		AAA5744007	25750	-	-
1000		AAA5746007	33000	-	-

MEDIUM VOLTAGE CABLE ACCESSORIES

Heat Shrinkable Termination Kit

Indoor / Outdoor 33kV Termination Kit - Model **HVT-M**



- Conforms to IS 13573-2
- Suitable for voltage upto 33 kV, cable range of 35 - 1000 Sq. mm.
- Suitable for XLPE Power Cables
- Built-in Tin plated Cu earthing braid
- Connector Type - Al Crimp
- Sleeve type: Tubular
- Indoor & Outdoor both versions come with rain skirts

Model		HVT-M			
		For 1 Core Cable		For 3 Core Cable	
Cable Size (in sq. mm)	Termination Type	PCN	List Price (INR) Per Unit	PCN	List Price (INR) Per Unit
35	Indoor Termination	AAA3717008	5650	AAA4717011	17150
50		AAA3719014	5950	AAA4719019	17800
70		AAA3721012	6200	AAA4721015	19350
95		AAA3723024	6250	AAA4723026	20700
120		AAA3725017	6300	AAA4725025	20850
150		AAA3727017	6400	AAA4727022	20900
185		AAA3729028	6450	AAA4729033	21250
240		AAA3733031	6850	AAA4733038	21550
300		AAA3735043	7650	AAA4735067	23350
400		AAA3737037	7950	AAA4737107	25150
500		AAA3739033	9900	-	-
630		AAA3741050	10600	-	-
800		AAA3743018	11250	-	-
1000		AAA3745022	13950	-	-
35	Outdoor Termination	AAA5717007	7900	AAA6717017	22650
50		AAA5719014	8100	AAA6719013	23300
70		AAA5721010	8200	AAA6721015	25250
95		AAA5723016	8300	AAA6723024	26500
120		AAA5725020	8350	AAA6725019	26650
150		AAA5727015	8400	AAA6727019	26850
185		AAA5729025	8500	AAA6729031	26950
240		AAA5733020	8600	AAA6733034	27450
300		AAA5735027	10250	AAA6735057	28400
400		AAA5737027	10650	AAA6737122	32250
500		AAA5739024	12650	-	-
630		AAA5741031	12650	-	-
800		AAA5743012	14000	-	-
1000		AAA5745023	16650	-	-

MEDIUM VOLTAGE CABLE ACCESSORIES

Heat Shrinkable Termination Kit

Indoor / Outdoor 33kV(UE) Termination Kit - Model **EPKT-UE**



- Conforms to - Generally as per IS 13573-2 with BIL 170 kVp
- Suitable for voltage upto 33 kV, cable range of 70 - 1000 Sq. mm.
- Suitable for XLPE Power Cables
- Built-in Tin plated Cu earthing braid
- Connector Type - Al Crimp
- Sleeve type: Tubular

Model		EPKT-UE			
		For 1 Core Cable		For 3 Core Cable	
Cable Size (in sq. mm)	Termination Type	PCN	List Price (INR) Per Unit	PCN	List Price (INR) Per Unit
70	Indoor Termination	AAA3721015	9000	AAA4721022	28700
95		AAA3723029	9050	AAA4723037	29000
120		AAA3725021	9700	AAA4725029	31950
150		AAA3727019	11000	AAA4727025	36350
185		AAA3729033	11100	AAA4729040	36700
240		AAA3733044	12650	AAA4733044	37750
300		AAA3735060	12750	AAA4735082	39000
400		AAA3737054	13150	AAA4737124	40200
500		AAA3739044	15300	-	-
630		AAA3741070	17850	-	-
800		AAA3743022	18950	-	-
1000		AAA3745026	19750	-	-
70	Outdoor Termination	AAA5721011	11000	AAA6721016	34350
95		AAA5723017	11100	AAA6723027	34650
120		AAA5725023	11700	AAA6725021	37600
150		AAA5727016	13700	AAA6727023	44100
185		AAA5729030	13800	AAA5729029	44450
240		AAA5733023	15600	AAA6733039	45450
300		AAA5735032	15750	AAA6735060	46750
400		AAA5737032	16000	AAA6737128	47950
500		AAA5739025	19600	-	-
630		AAA5741038	22200	-	-
800		AAA5743014	22650	-	-
1000		AAA5745027	24100	-	-

MEDIUM VOLTAGE CABLE ACCESSORIES

Heat Shrinkable Joint Kit

11kV Straight Through Joint Kit - Model **EPKJ-S, EPKJ-C & EPKJ-C-CU**



- Conforms to IS 13573-2
- Suitable for voltage upto 11 kV, cable range of 35 - 1000 Sq. mm.
- Suitable for XLPE Power Cables
- Built-in Tin plated Cu earthing braid
- Connector Type - Al Crimp for EPKJ-S & EPKJ-C and CU Crimp for EPKJ-C-CU
- Sleeve type: Tubular

Model		EPKJ-S				EPKJ-C			
		For 1 Core Cable		For 3 Core Cable		For 1 Core Cable		For 3 Core Cable	
Cable Size (in sq. mm)	Joint Type	PCN	List Price (INR) Per Unit	PCN	List Price (INR) Per Unit	PCN	List Price (INR) Per Unit	PCN	List Price (INR) Per Unit
35	Straight Through Joint	AAA1417011	13900	AAA2417031	33950	AAA1417010	12450	AAA2417030	32300
50		AAA1419013	13950	AAA2419032	36200	AAA1419012	12850	AAA2419031	33350
70		AAA1421017	15500	AAA2421047	36250	AAA1421016	13750	AAA2421046	35400
95		AAA1423028	16550	AAA2423058	36350	AAA2423057	14750	AAA2423056	35550
120		AAA1426002	16600	AAA2425064	44150	AAA1425019	14800	AAA2425063	35600
150		AAA1427026	17500	AAA2427069	44500	AAA1427025	14850	AAA2427068	36450
185		AAA1429018	19250	AAA2429087	47350	AAA1429017	16000	AAA2429086	46950
240		AAA1433019	20350	AAA2433107	49050	AAA1433018	17200	AAA2433106	47000
300		AAA1435021	21450	AAA2435134	49750	AAA1435020	17300	AAA2435133	47300
400		AAA1437021	23750	AAA2437076	50450	AAA1437020	21100	AAA2437075	49450
500		AAA1439013	25900	-	-	AAA1439012	23850	-	-
630		AAA1441026	30150	-	-	AAA1441025	26350	-	-
800		AAA2443001	33350	-	-	AAA1443011	28200	-	-
1000		AAA1445027	38550	-	-	AAA1445026	34150	-	-

Note: Connector Type - Al Crimp

Model		EPKJ-C-CU			
		For 1 Core Cable		For 3 Core Cable	
Cable Size (in sq. mm)	Termination Type	PCN	List Price (INR) Per Unit	PCN	List Price (INR) Per Unit
35	Straight Through Joint	AAA1418001	12300	AAA2418011	31400
50		AAA1420001	12550	AAA2420013	32600
70		AAA1422002	13450	AAA2422007	35000
95		AAA1424002	14500	AAA2424017	35650
120		AAA1426003	14800	AAA2426006	36250
150		AAA1428008	15100	AAA2428012	40550
185		AAA1430003	16700	AAA2430024	46400
240		AAA1434009	18300	AAA2434015	47750
300		AAA1436006	18950	AAA2435153	52450
400		AAA1438005	24700	AAA2438005	58950
500		AAA1440005	28150	-	-
630		AAA1442009	33450	-	-
800		AAA1444003	37200	-	-
1000		AAA1446002	55950	-	-

Note: Connector Type - Cu Crimp

MEDIUM VOLTAGE CABLE ACCESSORIES

Heat Shrinkable Joint Kit

11kV Straight Through Joint Kit - Model **HVS-X-M & HSJ**



- Conforms to IS 13573-2
- Suitable for voltage upto 11 kV, cable range of 35 - 1000 Sq. mm.
- Suitable for XLPE Power Cables
- Built-in Tin plated Cu earthing braid
- Connector Type - Al Crimp
- Sleeve type: Wraparound

Model	Cable Size (in sq. mm)	Joint Type	For 1 Core Cable		For 3 Core Cable	
			PCN	List Price (INR) Per Unit	PCN	List Price (INR) Per Unit
HVS-X-M	35	Straight Through Joint	AAA1417012	9250	AAA2417032	22150
	50		AAA1419014	9300	AAA2419033	22200
	70		AAA1421018	9350	AAA2421048	23150
	95		AAA1423029	9400	AAA2423060	23250
	120		AAA1425020	9500	AAA2425065	24950
	150		AAA1427027	9600	AAA2427070	26500
	185		AAA1429020	9700	AAA2429088	26950
	240		AAA1433020	12700	AAA2433108	27150
	300		AAA1435022	12750	AAA2435136	31250
	400		AAA1437022	13050	AAA2437077	36100
	500		AAA1439014	18850	-	-
	630		AAA1441028	20900	-	-
	800		AAA1443012	26600	-	-
	1000		AAA1445028	27700	-	-

Model	Cable Size (in sq. mm)	Joint Type	For 1 Core Cable		For 3 Core Cable	
			PCN	List Price (INR) Per Unit	PCN	List Price (INR) Per Unit
HSJ	35	Straight Through Joint	AAA1417013	5450	AAA2417036	15200
	50		AAA1419015	6200	AAA2419038	17600
	70		AAA1421019	6350	AAA2421052	17750
	95		AAA1423030	6400	AAA2423066	18150
	120		AAA1425021	6900	AAA2425070	19950
	150		AAA1427030	7100	AAA2427077	20200
	185		AAA1429021	7950	AAA2429093	20500
	240		AAA1433021	8650	AAA2433120	24650
	300		AAA1435025	8950	AAA2435146	25150
	400		AAA2437084	9200	AAA2437086	25950
	500		AAA1439017	9250	-	-
	630		AAA1441032	9350	-	-
	800		AAA1443014	12650	-	-
	1000		AAA1445029	13600	-	-

MEDIUM VOLTAGE CABLE ACCESSORIES

Heat Shrinkable Joint Kit

Straight Through Joint Kit - Model **MXSW**



- Conforms to IS 13573-2
- Suitable for voltage upto 11 kV, cable range of 35 - 1000 Sq. mm.
- Suitable for XLPE Power Cables
- Built-in Tin plated Cu earthing braid
- Built-in Al Mechanical connector
- Sleeve type: Rayfit Tubular

Model	Cable Size (in sq. mm)	Joint Type	For 1 Core Cable		For 3 Core Cable	
			PCN	List Price (INR) Per Unit	PCN	List Price (INR) Per Unit
MXSW	25-95	Straight Through Joint	AAA1419006	13800	AAA2400023	33000
	120-240		AAA1434004	17400	AAA2400024	52850
	300-400		AAA1438002	21100	AAA2400025	64300
	500		AAA1440003	30200	-	-
	630		AAA1441016	31900	-	-
	800		AAA1444001	43400	-	-
	1000		AAA1446001	43450	-	-

MEDIUM VOLTAGE CABLE ACCESSORIES

Heat Shrinkable Joint Kit

22kV Straight Through Joint Kit - Model **EPKJ-S, EPKJ-C & EPKJ-C-CU**



- Conforms to IS 13573-2
- Suitable for voltage upto 22 kV, cable range of 35 - 1000 Sq. mm.
- Suitable for XLPE Power Cables
- Built-in Tin plated Cu earthing braid
- Connector Type - Al Crimp for EPKJ-S, EPKJ-C and Cu Crimp for EPKJ-C-CU
- Sleeve type: Tubular

Model		EPKJ-S				EPKJ-C			
		For 1 Core Cable		For 3 Core Cable		For 1 Core Cable		For 3 Core Cable	
Cable Size (in sq. mm)	Joint Type	PCN	List Price (INR) Per Unit	PCN	List Price (INR) Per Unit	PCN	List Price (INR) Per Unit	PCN	List Price (INR) Per Unit
35	Straight Through Joint	-	-	AAA2617008	49450	-	-	AAA2617009	48350
50		AAA1619006	19050	AAA2619008	50100	AAA1619007	17400	AAA2619009	48650
70		AAA1621009	22700	AAA2621013	65850	AAA1621010	18650	AAA2621014	58850
95		AAA1623008	24150	AAA2623022	66550	AAA1623009	19800	AAA2623023	59550
120		AAA1625007	24200	AAA2625020	68650	AAA1625008	21600	AAA2625021	67600
150		AAA1627008	24250	AAA2627018	69300	AAA1627009	21650	AAA2627019	69300
185		AAA1629010	26450	AAA2629023	74250	AAA1629011	21700	AAA2629024	72800
240		AAA1633010	26600	AAA2633035	77000	AAA1633011	21850	AAA2633036	73550
300		AAA1635011	29800	AAA2635038	80500	AAA1635012	23150	AAA2635039	74250
400		AAA1637014	32650	AAA2637025	81850	AAA1637015	26850	AAA2637026	79800
500		AAA1639014	37200	-	-	AAA1639015	33700	-	-
630		AAA1641016	45600	-	-	AAA1641017	37500	-	-
800		AAA1643005	51150	-	-	AAA1643006	45900	-	-
1000		AAA1645010	67900	-	-	AAA1645011	62650	-	-

Note: Connector Type - Al Crimp

Model		EPKJ-C-CU			
		For 1 Core Cable		For 3 Core Cable	
Cable Size (in sq. mm)	Termination Type	PCN	List Price (INR) Per Unit	PCN	List Price (INR) Per Unit
35	Straight Through Joint	-	-	AAA2618001	47400
50		AAA1620002	16950	AAA2620002	47650
70		AAA1622002	18200	AAA2622003	57300
95		AAA1624003	19350	AAA2624002	58400
120		AAA1626004	22050	AAA2626002	68150
150		AAA1628001	22250	AAA2628003	68800
185		AAA1630001	22550	AAA2630007	70300
240		AAA1634002	23150	AAA2634004	74350
300		AAA1636004	24850	AAA2636005	75750
400		AAA1638005	31700	AAA2638001	91700
500		AAA1640004	38450	-	-
630		AAA1642005	45050	-	-
800		AAA1644002	54000	-	-
1000		AAA1646005	82650	-	-

Note: Connector Type - Cu Crimp

MEDIUM VOLTAGE CABLE ACCESSORIES

Heat Shrinkable Joint Kit

22kV Straight Through Joint Kit - Model **HVCJ-M**



- Conforms to IS 13573-2
- Suitable for voltage upto 22 kV, cable range of 35 - 1000 Sq. mm.
- Suitable for XLPE Power Cables
- Built-in Tin plated Cu earthing braid
- Connector Type - Al Crimp
- Sleeve type: Wraparound

Model	Cable Size (in sq. mm)	Joint Type	For 1 Core Cable		For 3 Core Cable	
			PCN	List Price (INR) Per Unit	PCN	List Price (INR) Per Unit
HCVJ-M	35	Straight Through Joint	-	-	AAA2617010	35700
	50		AAA1619008	13450	AAA2619010	36250
	70		AAA1621011	13850	AAA2621015	36800
	95		AAA1623010	14000	AAA2623024	37250
	120		AAA1625009	20450	AAA2625022	50050
	150		AAA1627010	20550	AAA2627020	50400
	185		AAA1629012	20600	AAA2629025	50750
	240		AAA1633012	21650	AAA2633037	51500
	300		AAA1635013	21700	AAA2635040	51850
	400		AAA1637016	23550	AAA2637027	61450
	500		AAA1639016	24600	-	-
	630		AAA1641018	24950	-	-
	800		AAA1643007	30850	-	-
	1000		AAA1645012	47100	-	-

MEDIUM VOLTAGE CABLE ACCESSORIES

Heat Shrinkable Joint Kit

22kV Straight Through Joint Kit - Model **MXSW**



- Conforms to IS 13573-2
- Suitable for voltage upto 22 kV, cable range of 35 - 1000 Sq. mm.
- Suitable for XLPE Power Cables
- Built-in Tin plated Cu earthing braid
- Built-in Al Mechanical connector
- Sleeve type : Rayfit Tubular

Model	Cable Size (in sq. mm)	Joint Type	For 1 Core Cable		For 3 Core Cable	
			PCN	List Price (INR) Per Unit	PCN	List Price (INR) Per Unit
MXSW	25-95	Straight Through Joint	AAA1624001	20000	AAA2600012	53150
	120-240		AAA1600012	20300	AAA2600013	59700
	300-400		AAA1600013	29950	AAA2600014	76350
	500		AAA1640001	36550	-	-
	630		AAA1642003	39650	-	-
	800		AAA1644001	57450	-	-
	1000		AAA1646004	57750	-	-

33kV Straight Through Joint Kit - Model **EPKJ-S & EPKJ-C**



- Conforms to IS 13573-2
- Suitable for voltage upto 33 kV, cable range of 35 - 1000 Sq. mm.
- Suitable for XLPE Power Cables
- Built-in Tin plated Cu earthing braid
- Connector Type - Al Crimp
- Sleeve type : Tubular

Model		EPKJ-S				EPKJ-C			
		For 1 Core Cable		For 3 Core Cable		For 1 Core Cable		For 3 Core Cable	
Cable Size (in sq. mm)	Joint Type	PCN	List Price (INR) Per Unit	PCN	List Price (INR) Per Unit	PCN	List Price (INR) Per Unit	PCN	List Price (INR) Per Unit
35	Straigh tthrough Joint	AAA1717004	27350	AAA2717006	71050	AAA1717005	20450	AAA2170001	59550
50		AAA1719008	27400	AAA2719010	71400	AAA1719009	23500	AAA2719011	69650
70		AAA1721008	27450	AAA2721013	80750	AAA1721009	23550	AAA2721014	70000
95		AAA1723012	31900	AAA2723012	82600	AAA1723013	28650	AAA2723013	80500
120		AAA1725009	31900	AAA2725015	83200	AAA1725010	29200	AAA2725016	81900
150		AAA1727011	31950	AAA2727020	84750	AAA1727012	29250	AAA2727021	84050
185		AAA1729017	41350	AAA2729028	90300	AAA1729018	35750	AAA2729029	89600
240		AAA1733022	41700	AAA2733042	92750	AAA1733023	36150	AAA2733043	90300
300		AAA1735025	42000	AAA2735075	93500	AAA1735026	37200	AAA2735076	90950
400		AAA1737030	42400	AAA2737085	94050	AAA1737031	37500	AAA2737086	91150
500		AAA1739012	75600	-	-	AAA1739013	64050	-	-
630		AAA1741029	76100	-	-	AAA1741030	64400	-	-
800		AAA1743007	77000	-	-	AAA1743008	65100	-	-
1000		AAA1745016	77700	-	-	AAA1745017	66150	-	-

MEDIUM VOLTAGE CABLE ACCESSORIES

Heat Shrinkable Joint Kit

33kV Straight Through Joint Kit - Model **EPKJ-C-CU**



- Conforms to IS 13573-2
- Suitable for voltage upto 33 kV, cable range of 35 - 1000 Sq. mm.
- Suitable for XLPE Power Cables
- Built-in Tin plated Cu earthing braid
- Connector Type - Cu Crimp
- Sleeve type: Tubular

Model	EPKJ-C-CU				
Cable Size (in sq. mm)	Joint Type	For 1 Core Cable		For 3 Core Cable	
		PCN	List Price (INR) Per Unit	PCN	List Price (INR) Per Unit
35	Straight Through Joint	AAA1718001	20000	AAA2718001	58400
50		AAA1720002	23000	AAA2720001	67350
70		AAA1722001	23100	AAA2722003	68000
95		AAA1724006	28050	AAA2724007	78650
120		AAA1726002	28800	AAA2726002	80950
150		AAA1728007	29000	AAA2728006	81550
185		AAA1730011	35600	AAA2730005	90150
240		AAA1734027	36450	AAA2734009	92450
300		AAA1736010	38400	AAA2736013	95000
400		AAA1738022	40700	AAA2738010	104550
500		AAA1740015	66050	-	-
630		AAA1742010	70650	-	-
800		AAA1744005	73400	-	-
1000		AAA1746004	87050	-	-

MEDIUM VOLTAGE CABLE ACCESSORIES

Heat Shrinkable Joint Kit

33kV Straight Through Joint Kit - Model **HVCJ-M**



- Conforms to IS 13573-2
- Suitable for voltage upto 33 kV, cable range of 35 - 1000 Sq. mm.
- Suitable for XLPE Power Cables
- Built-in Tin plated Cu earthing braid
- Connector Type - Al Crimp
- Sleeve type: Wraparound

Model	Cable Size (in sq. mm)	Joint Type	For 1 Core Cable		For 3 Core Cable	
			PCN	List Price (INR) Per Unit	PCN	List Price (INR) Per Unit
HCVJ-M	35	Straight Through Joint	AAA1717006	18350	AAA2717007	42350
	50		AAA1719010	22550	AAA2719012	53900
	70		AAA1721010	22600	AAA2721015	56700
	95		AAA1723014	23250	AAA2723014	60600
	120		AAA1725011	24300	AAA2725017	70500
	150		AAA1727013	25000	AAA2727022	70950
	185		AAA1729019	25200	AAA2729030	71300
	240		AAA1733024	26450	AAA2733044	71950
	300		AAA1735027	28000	AAA2735077	76550
	400		AAA1737032	29000	AAA2737087	80750
	500		AAA1739014	48550	-	-
	630		AAA1741031	51400	-	-
	800		AAA1743009	54850	-	-
	1000		AAA1745018	55150	-	-

33kV Straight Through Joint Kit - Model MXSW



- Conforms to IS 13573-2
- Suitable for voltage upto 33 kV, cable range of 35 - 1000 Sq. mm.
- Suitable for XLPE Power Cables
- Built-in Tin plated Cu earthing braid
- Built-in Al Mechanical connector
- Sleeve type: Rayfit Tubular

Model	Cable Size (in sq. mm)	Joint Type	For 1 Core Cable		For 3 Core Cable	
			PCN	List Price (INR) Per Unit	PCN	List Price (INR) Per Unit
MXSW	35-95	Straight Through Joint	AAA1700012	26400	AAA2700019	80900
	120-240		AAA1700013	35050	AAA2700020	100400
	300-400		AAA1700014	37950	AAA2700021	106100
	500		AAA1740007	58000	-	-
	630		AAA1741015	59150	-	-
	800		AAA1744001	64300	-	-
	1000		AAA1746001	64900	-	-

MEDIUM VOLTAGE CABLE ACCESSORIES

Heat Shrinkable Joint Kit

33kV(UE) Straight Through Joint Kit - Model **EPKJ-UE**



- Conforms to – Generally as per IS 13573-2 with BIL 170 kVp
- Suitable for voltage upto 33 kV, cable range of 70 - 1000 Sq. mm.
- Suitable for XLPE Power Cables
- Built-in Tin plated Cu earthing braid
- Connector Type - Al Crimp
- Sleeve type: Tubular

Model	Cable Size (in sq. mm)	Joint Type	For 1 Core Cable		For 3 Core Cable	
			PCN	List Price (INR) Per Unit	PCN	List Price (INR) Per Unit
EPKJ-UE	70	Straight Through Joint	AAA1721012	29850	AAA2721016	81850
	95		AAA1723015	35650	AAA2723019	86550
	120		AAA1725015	36250	AAA2725018	89100
	150		AAA1727015	36700	AAA2727023	90350
	185		AAA1729020	42750	AAA2729033	110100
	240		AAA1733025	42950	AAA2733047	110400
	300		AAA1735030	57600	AAA2735083	151850
	400		AAA1737037	59000	AAA2737098	156950
	500		AAA1739019	92800	-	-
	630		AAA1741036	93200	-	-
	800		AAA1743010	128500	-	-
	1000		AAA1745021	134850	-	-

MEDIUM VOLTAGE CABLE ACCESSORIES

Switchgear Plug-in Termination Kit

Switchgear Inner Cone Termination - Model **RPIT**



- Conforms to size 2 & 3 bushing as per EN50180 / EN 50181
- Plug-in single core termination for Inner cone bushing
- Separable inline connection for high current, gas insulated switchgears up to 42 kV

Model	System Voltage (kV)	Size of Bushing	Max Current Amp)	Insulation Diameter Range (in mm)	For 1/3 Core Cable	
					PCN	List Price (INR) Per Unit
RPIT	up to 36kV	Size-2	800	19.5 - 42	**Available on request**	**Available on request**
	up to 42kV	Size-3	1250	26-50		
Trifurcation Kit	up to 42kV	Size - 2/3	-	-		

Note: Cable data sheet mandatory for right product selection.

MEDIUM VOLTAGE CABLE ACCESSORIES

Switchgear Plug-in Termination Kit

Switchgear Outer Cone Termination - Model **ELBC**



- Conforms to type C bushing as per EN50180 / EN 50181
- Suitable for voltage upto 33kV & current upto 1250 Amps, wide cable range of 35 - 800 Sq. mm.
- Screened, Separable elbow connector for Type C bushing
- Built-in Trifurcation Kit for three core version
- Connector Type - Al Mechanical
- Removable rear plug with capacitive test point
- Earthing Eye and Ground lead provides a connection point for earthing the screen

Model	System Voltage (kV)	Connector Type	Cable Size (in sq.mm)	Max Current Amp)	Cable Insulation Diameter Range (in mm)	# For 1 Core Cable		For 3 Core Cable	
						PCN	List Price (INR) Per 3 Unit	PCN	List Price (INR) Per Unit
ELBC	11kV	Front Connectors For Type C Bushing	35-50	800A	13.5-18.0	AAA4119018	82750	AAA4119019	83450
			70-95		17.0-22.0	AAA4119021	85650	AAA4423085	87700
			120		17.0-22.0	AAA4125018	94800	AAA4425088	95500
			150-185		21.5-27.0	AAA3429022	94800	AAA4429136	95500
			240-300		26.0-30.0	AAA4135027	94800	AAA4435160	95500
			400		30.0-37.5	AAA3437026	94800	AAA0437011	95500
		Rear (Coupling) Connectors for Type Cbushing	35-50	800A	13.5-18.0	AAA4837002	78100	AAA4119020	80150
			70-95		17.0-22.0	AAA4123016	88800	AAA4423087	90150
			120		17.0-22.0	AAA4125020	88800	AAA4425090	90150
			150-185		21.5-27.0	AAA4129023	88800	AAA4129024	90150
			240-300		26.0-30.0	AAA4135028	88800	AAA4435163	90150
			400		30.0-37.5	AAA3437027	88800	AAA0437012	90150
	22kV	Front Connectors for Type C Bushing	35-50	800A	17.0-22.0	AAA4619013	92100	AAA4619014	92800
			70-95		21.5-27.0	AAA3623018	92100	AAA4623041	92800
			120		23.5-27.0	AAA3625016	92100	AAA4625036	92800
			150-185		26.0-30.0	AAA4129020	92100	AAA4629030	92800
			240-300		30.0-37.5	AAA4635062	92100	AAA4635064	92800
			400	1250A	33.0-38.0	AAA3637029	117500	AAA4637034	120100
			500		37.0-42.0	AAA4139008	117500	AAA4139009	120100
			630		41.0-47.0	AAA4139012	117500	AAA4139013	120100
			800		47.0-52.0	AAA4143002	167550	-	-
		Rear (Coupling) Connectors for Type C Bushing	35-50	800A	17.0-22.0	AAA4619015	86800	AAA4619016	87450
			70-95		21.5-27.0	AAA4623030	86800	AAA4623044	87450
			120		23.5-27.0	AAA4625028	86800	AAA4625029	87450
			150-185		26.0-30.0	AAA4629032	86800	AAA4629033	87450
			240-300		30.0-37.5	AAA4635051	86800	AAA4635067	87450
			400	1250A	33.0-38.0	AAA3637030	104100	AAA4137023	106150
			500		37.0-42.0	AAA4139010	104100	AAA4139011	106150
			630		41.0-47.0	AAA4139014	104100	AAA4139015	106150
			800		47.0-52.0	AAA4143003	152800	-	-

Supplied In set of 3 units.

MEDIUM VOLTAGE CABLE ACCESSORIES

Switchgear Plug-in Termination Kit

Switchgear Outer Cone Termination - Model **ELBC**



- Conforms to type C bushing as per EN50180 / EN 50181
- Suitable for voltage upto 33kV & current upto 1250 Amps, wide cable range of 35 - 800 Sq. mm.
- Screened, Separable elbow connector for Type C bushing
- Built-in Trifurcation Kit for three core version
- Connector Type - Al Mechanical
- Removable rear plug with capacitive test point
- Earthing Eye and Ground lead provides a connection point for earthing the screen

Model	System Voltage (kV)	Connector Type	Cable Size (in sq.mm)	Max Current Amp)	Cable Insulation Diameter Range (in mm)	# For 1 Core Cable		For 3 Core Cable	
						PCN	List Price (INR) Per 3 Unit	PCN	List Price (INR) Per Unit
ELBC	33kV	Front Connectors for Type C Bushing	35-70	800A	24.5-29.0	AAA1048441	100150	AAA1048446	103450
			95-150		29.0-34.0	AAA1048435	100150	AAA1048443	103450
			150-240		33.0-38.0	AAA1048442	100150	AAA4729035	103450
			240-300		37.0-41.0	AAA1048436	100150	AAA1048456	103450
			400	1250A	41.0-47.0	AAA3737040	128150	AAA4137025	131500
			500		41.0-47.0	AAA3739035	128150	AAA4139017	131500
			630		47.0-52.0	AAA3741053	128150	AAA4141010	131500
			800		52.0-59.0	AAA4143004	176800	-	-
		Rear (Coupling) Connectors for Type C Bushing	35-70	800A	24.5-29.0	AAA4719012	81450	AAA1048450	84750
			95-150		29.0-34.0	AAA4725018	91450	AAA1048454	95500
			150-240		33.0-38.0	AAA4729024	91450	AAA1048455	95500
			240-300		37.0-41.0	AAA1048449	91450	AAA1048458	95500
			400	1250A	41.0-47.0	AAA3737043	104100	AAA4137027	108150
			500		41.0-47.0	AAA4139018	104100	AAA4139019	108150
			630		47.0-52.0	AAA3741056	104100	AAA4141012	108150
			800		52.0-59.0	AAA3143002	152800	-	-

Supplied In set of 3 units.

MEDIUM VOLTAGE CABLE ACCESSORIES

Switchgear Plug-in Termination Kit

Switchgear Outer Cone Termination - Model **RSTI**



- Conforms to Type C bushing as per EN50180 / EN 50181
- Suitable for type c bushing as per voltage upto 33kV & current upto 1250 Amps, wide cable range of 35 - 800 Sq. mm.
- Screened, Separable elbow connector for Type C bushing
- Built-in Trifurcation Kit for three core version
- Connector Type - Al Mechanical
- Removable rear plug with capacitive test point
- Earthing Eye and Ground lead provides a connection point for earthing the screen

Model	System Voltage (kV)	Connector Type	Cable Size (in sq.mm)	Max Current Amp)	Cable Insulation Diameter Range (in mm)	# For 1 Core Cable		For 3 Core Cable	
						PCN	List Price (INR) Per 3 Unit	PCN	List Price (INR) Per Unit
RSTI	11kV	Front Connectors for Type C Bushing	35-95	800A	12.7-25.0	AAA3623007	112800	AAA4621015	114750
			95-120		12.7-25.0	AAA3425008	112800	AAA4425063	116000
			95-240		17-32.6	AAA3633014	112800	AAA4633025	117300
			150-240		21.3-34.6	AAA3633015	112800	AAA4633026	117300
			185-300		21.3-34.6	AAA3635020	116000	AAA4635036	120450
			400	1250A	28.9-36.4	AAA3437014	270100	AAA4437058	273250
			500		28.9-36.4	AAA3439021	270750	AAA4439011	275250
			630		34-45.4	AAA3441030	270750	AAA4441016	275250
			800		34-45.4	AAA3443009	307700	-	-
		Rear (Coupling) Connectors for Type C Bushing	35-95	800A	12.7-25.0	AAA3623008	111550	AAA4623023	114100
			95-120		12.7-25.0	AAA3425009	111550	AAA4425064	114750
			95-240		17-32.6	AAA3633016	111550	AAA4633027	116000
			150-240		21.3-34.6	AAA3633017	111550	AAA4633028	116000
			185-300		21.3-34.6	AAA3635021	114750	AAA4635037	119800
			400	1250A	28.9-36.4	AAA3437015	315350	AAA4437059	318500
			500		28.9-36.4	AAA3439022	316000	AAA4439012	320400
			630		34-45.4	AAA3441031	316000	AAA4441017	320400
			800		34-45.4	AAA3441032	352850	-	-
	22kV	Front Connectors for Type C Bushing	35-70	800A	12.7-25.0	AAA3623007	112800	AAA4621015	114750
			95-185		17-32.6	AAA3633014	112800	AAA4633025	117300
			95-240		21.3-34.6	AAA3633015	112800	AAA4633026	117300
			185-300		21.3-34.6	AAA3635020	116000	AAA4635036	120450
			400	1250A	34.0-45.4	AAA3637016	256800	AAA4637021	261200
			500		34.0-45.4	AAA3639014	257400	AAA4639007	261800
			630		39.1-59.0	AAA3641018	274650	AAA4641003	278400
			800		39.1-59.0	AAA3643007	324900	-	-
		Rear (Coupling) Connectors for Type C Bushing	35-70	800A	12.7-25.0	AAA3623008	111550	AAA4623023	114100
			95-185		17-32.6	AAA3633016	111550	AAA4633027	116000
			95-240		21.3-34.6	AAA3633017	111550	AAA4633028	116000
			185-300		21.3-34.6	AAA3635021	114750	AAA4635037	119800
			400	1250A	34.0-45.4	AAA3637017	301950	AAA4637022	306450
			500		34.0-45.4	AAA3639015	302550	AAA4639008	307050
			630		39.1-59.0	AAA3641019	319800	AAA4641004	323550
			800		39.1-59.0	AAA3643008	370050	-	-

Supplied In set of 3 units.

MEDIUM VOLTAGE CABLE ACCESSORIES

Switchgear Plug-in Termination Kit

Switchgear Outer Cone Termination - Model **RSTI**



- Conforms to Type C bushing as per EN50180 / EN 50181
- Suitable for type c bushing as per voltage upto 33kV & current upto 1250 Amps, wide cable range of 35 - 800 Sq. mm.
- Screened, Separable elbow connector for Type C bushing
- Built-in Trifurcation Kit for three core version
- Connector Type - Al Mechanical
- Removable rear plug with capacitive test point
- Earthing Eye and Ground lead provides a connection point for earthing the screen

Model	System Voltage (kV)	Connector Type	Cable Size (in sq.mm)	Max Current Amp)	Cable Insulation Diameter Range (in mm)	# For 1 Core Cable		For 3 Core Cable	
						PCN	List Price (INR) Per 3 Unit	PCN	List Price (INR) Per Unit
RSTI	33kV	Front Connectors for Type C Bushing	35-95	800A	22.4-35.5	AAA3723010	162500	AAA4723016	166300
			95-150		22.4-35.5	AAA3727008	162500	AAA4727016	166300
			120-240		28.9-42.0	AAA3733012	162500	AAA4733021	166300
			185-300		28.9-42.0	AAA3735019	162500	AAA4735038	166300
			400	1250A	34.0-45.4	AAA3737013	256900	AAA4737079	220550
			500-630		39.1-59.0	AAA3741027	261000	AAA4741001	282200
			800		39.1-59.0	AAA3743008	324900	-	-
		Rear (Coupling) Connectors for Type C Bushing	35-95	800A	22.4-35.5	AAA3723011	174000	AAA4723017	177750
			95-150		22.4-35.5	AAA3727009	174000	AAA4727017	177750
			120-240		28.9-42.0	AAA3733013	174000	AAA4733022	177750
			185-300		28.9-42.0	AAA3735020	174000	AAA4735039	177750
			400	1250A	34.0-45.4	AAA3737014	302550	AAA4737080	310200
			500-630		39.1-59.0	AAA3741028	319800	AAA4741002	327450
			800		39.1-59.0	AAA3743009	370050	-	-

Supplied In set of 3 units.

Raychem RPG



TECHNOLOGY YOU CAN RELY ON FOR CRITICAL CONNECTION

EXTRA HIGH VOLTAGE OHVT TERMINATION & EHVS JOINT - UP TO 245KV



OHVT
Outdoor High Voltage Termination

EHVS
Energy High Voltage Splice

Power supply is one of the key elements for the energy industry and cable connection is the backbone of it.

Raychem RPG's EHVS Joint & OHVT Termination are highly engineered connections that brings reliability to your EHV network.
It shows the difference that it can make. You get a greater level of reliability and the assurance that critical connection is guaranteed each time, every time.
Both OHVT & EHVS Kit Conforms to IEC 60840 and IEC 62067 Standards. Polymeric insulated cables of various designs can be adopted with respect to shielding and metal sheath.

Reap the benefits of the advanced technology today

Why wait? Contact us now.

Follow us on:

HIGH VOLTAGE CABLE ACCESSORIES

Heat Shrinkable Termination Kit

Indoor / Outdoor 52/72kV Termination Kit - Model IHVT/0HVT



- Conforms to - IEC 60840
- Suitable for voltage upto 66 kV, Approx cable range of 95 - 1600 Sq. mm.
- Suitable for XLPE Power Cables
- Built-in Tin plated Cu earthing braid
- Connector Type - Crimp (Mech Conn - Optional)
- Sleeve type : Tubular

Model	Cable size	Cable size (dia over XLPE in mm)	Cable size (dia oversheath in mm)	Termination Type	For 1 Core Cable	
					PCN	List Price (INR) Per Unit
IHVT	Size1	30-45 mm	<=60 mm	Indoor	**Available on Request**	**135950**
OHVT	Size 1	30-45 mm	<=60 mm	Outdoor		**140150**
IHVT	Size 2	38-55 mm	<=70 mm	Indoor		**140150**
OHVT	Size 2	38-55 mm	<=70 mm	Outdoor		**144650**
IHVT	Size 3	48-65 mm	<=80 mm	Indoor		**144650**
OHVT	Size 3	48-65 mm	<=80 mm	Outdoor		**155600**
IHVT	Size 4	58-77 mm	<=100 mm	Indoor		**155600**
OHVT	Size 4	58-77 mm	<=100 mm	Outdoor		**217800**
IHVT	Size 5	70-86 mm	<=110 mm	Indoor		**On Request**
OHVT	Size 5	70-86 mm	<=110 mm	Outdoor		**On Request**

52/72kV Straight Through Joint Kit - Model EHVS



- Conforms to - IEC 60840
- Suitable for voltage upto 66 kV, Approx cable range of 95 - 1600 Sq. mm.
- Suitable for XLPE Power Cables
- Built-in Tin plated Cu earthing braid
- Connector Type - Crimp / Mech Connector
- Sleeve type : Tubular

Model	Cable size	Connector Length (in mm)	Cable size (dia over XLPE in mm)	Cable Size (dia oversheath in mm)	Joint Type	For 1 Core Cable	
						PCN	List Price (INR) Per Unit
EHVS	Size 1	130 mm	30-45 mm	<=50 mm	Inline/Shield break	**Available on Request**	**189450**
	Size 2	130 mm	42-55 mm	<=70 mm			**199950**
	Size 3	130 mm	52-65 mm	<=80 mm			**215100**
	Size 3	180 mm	52-65 mm	<=80 mm			**247200**
	Size 4	180 mm	62-77 mm	<=90 mm			**274100**
	Size 5	180 mm	70-100 mm	<=115 mm			**On Request**

EXTRA HIGH VOLTAGE CABLE ACCESSORIES

Termination Kit

Outdoor 72/145/245 Oil filled Termination Kit- Model **OHVT-C**



- Conforms to - IEC 60840 / 62067
- Suitable for voltage upto 72/145/245 kV, Approx cable range of 185 - 2500 sq. mm.
- Suitable for XLPE Power Cables
- Built-in Tin plated Cu earthing braid
- Connector Type - Mechanical Connector
- Oil - Silicone / PIB
- Insulator - Composite type

Model	Cable kV	Oil	For 1 Core Cable	
			PCN	List Price (INR) Per Unit
OHVT-C	72	Silicone	Available on Request	841850
	145			1122450
	245 (S)			2677250
	245 (B)			3254000
	72	PIB		820000
	145			956300
	245 (S)			2140200
	245 (B)			2323650

Outdoor 145 Dry Self- Supporting Termination Kit - Model **OHVT-DS**



- Dry Interface – No gel or liquid
- Self-supporting design
- Extended shelf life
- Top bolt with mechanical connector
- Type tested as per latest IEC 60840
- Isolated base plate for sectionalization

Model	Cable kV	Type	For 1 Core Cable	
			PCN	List Price (INR) Per Unit
OHVT-DS	145	Dry Self-Supporting	Available on Request	1707800

EXTRA HIGH VOLTAGE CABLE ACCESSORIES

Termination Kit

Indoor 72/145/245 Dry Type plug in Termination Kit - Model **PHVS/PHVT**



- Conforms to - IEC 60840 / 62067. GIS - IEC 62271-209, En50299
- Suitable for voltage upto 72/145/245 kV, Approx cable range of 185 - 2500 sq.mm.
- Suitable for XLPE Power Cables
- Built-in Tin plated Cu earthing braid
- Connector Type - Wedge Conical Connector
- Switchgear termination - PHVS - Socket + Plug in Termination
- Transformer termination - PHVT - Socket + Plug in Termination + Corona ring
- IEC Adaptor (Extension rod) - Optional

Model	Cable kV	Type	For 1 Core Cable	
			PCN	List Price (INR) Per Unit
PHVS	72	PHVS	Available on Request	628700
	145 S (< 72 mm)			800850
	145 B (> 72 mm)			1120400
	245			1536750
PHVT	72	PHVT		657850
	145 S (< 72 mm)			858600
	145 B (> 72 mm)			1182000
	245			1591750

*** IEC Adaptor to be ordered separately**

Cold Applied Joint Kit

72/145/245 Straight Through Joint Kit - Model **EHVS**



- Conforms to - IEC 60840 / 62067
- Suitable for voltage upto 72/145/245 kV, Approx cable range of 185 - 2500 sq.mm
- Suitable for XLPE Power Cables
- Built-in Tin plated Cu earthing braid
- Connector Type - Mechanical Connector
- Outer sealing - Heat Shrink Sleeve, (Cu Casing and FRP coffin box are optional)

Model	Cable kV	Type	For 1 Core Cable	
			PCN	List Price (INR) Per Unit
EHVS	72	Inline / Shield break, Heat shrink encapsulation	Available on Request	619350
	145			743650
	245			1261200

Raychem RPG



SOLARLOK
PV4-S1 CONNECTORS



Features :

- Provides waterproof protection and is rated for IP68 (1 m / 24 hours) protection
- Minimizes power loss by providing low contact resistance
- One pole connector for 1500V DC
- Durable and UV-Resistant Housing
- Easy and secure cable connections

Cable Size (sq.mm)	PCN	Type	MOQ	List Price (INR) Per Unit	Packing Type
2.5 - 4.0	AAASOA0003	Pin	6000	117	Strip
2.5 - 4.0	AAASOA0004	Socket	6000	117	Strip
2.5 - 4.0	EPASOA1028	Pin	1000	117	Loose
2.5 - 4.0	EPASOA1029	Socket	1000	117	Loose
4.0 - 6.0	EPASOA1008	Pin	6000	117	Strip
4.0 - 6.0	EPASOA1009	Socket	6000	117	Strip
4.0 - 6.0	EPASOA1010	Pin	1000	117	Loose
4.0 - 6.0	EPASOA1011	Socket	1000	117	Loose

CONNECTORS & FITTINGS



CONNECTORS & FITTINGS FOR MVCC


Anchor Clamp



- Conforms to EN 50397-2 Standards
- Built-in Insulation Piercing mechanism
- Clamp body made of corrosion resistant aluminium alloy, bail of stainless steel, wedges of weather and UV resistant polymer

Model	Cable Range (in sq.mm)	PCN	List Price (INR) Per Unit
Anchor Clamp (Wedge type)	50-99	AJA4040662	2640
	95 - 160	EPACLM1013	5720

Suspension Clamp



- Conforms to EN 50397-2 Standards
- Built-in Insulation Piercing mechanism
- Roller provided for easy installation of covered conductor
- No need for additional pulley during installation

Model	Cable Range (in sq.mm)	PCN	List Price (INR) Per Unit
Suspension Clamp	50 - 157	AJA3020251	7450

WATERPROOF INSULATION PIERCING CONNECTORS (IPC)



- Conforms to EN 50397-2 Standard
- Components are not losable, end cap attached to body
- Insulation material made of weather and UV resistant glass fibre reinforced polymer
- Contact plates made of copper, bolt made of steel with Geomet (Chromium free) protection

Model	Connection Type	Blade Material	Main Conductor Size (sq. mm.)	Top Conductor Size (sq. mm.)	PCN	List Price (INR) Per Unit
IPC	Bare Conductor to Covered Conductor	Tin PlatedCopper	50 - 99	50 - 99	AJA4040620	1330
	Covered Conductor to Covered Conductor		50 - 99	50 - 99	AJA4040619	1330
			95 - 240	35 - 95	AJA4040552	1350
			185 - 300	150 - 240	AAA6135023	3690

CONNECTORS & FITTINGS FOR LV ABC

Deep Drawn Box



- Made of CRCA MS Sheet with no welding joint to make base & cover of the box
- Box dimensions: 418 mm x 300 mm x 120 mm.
- 3 Phase Aluminium busbar with Neutral and plastic casing for projection
- Tapered roof design to drain rainwater

Model	Type	PCN	List Price (INR) Per Unit
Deep Drawn Box	3 Phase + Neutral DB	AAA1048048	3490

Kindly reach our branch office for customized Deep Drawn Box

Anchor Clamp for LV ABC Insulated Messenger



- Conforms to EN 50483-3 and NFC 33 041 Standards
- Tool free installation
- Clamp body made of corrosion resistant aluminium alloy, bail of stainless steel, wedges of weather and UV resistant polymer

Model	Cable Range (in sq.mm)	PCN	List Price (INR) Per Unit
Anchor Clamp (Wedge type)	25 - 35	AJA4040213	985
	25 - 50	AJA4040326	985
	50 - 70	AJA4040179	985
	70 - 95	AJA4040419	1050
	95 - 120	AJA4040550	1780

Suspension Clamp for LV ABC Insulated Messenger



- Conforms to EN 50483-3 and NFC 33 040 Standards
- Tool free installation
- Clamp and movable link made of weather and UV-light resistant glass fibre reinforced polymer
- Clamp and link made of polymer giving an additional insulation between the cable and the pole

Model	Cable Range (in sq.mm)	PCN	List Price (INR) Per Unit
Suspension Clamp (boltless type)	25 - 95	AJA4040117	360

CONNECTORS & FITTINGS FOR LV ABC

Service Anchor Clamp



- Conforms to NFC 33042 Standards
- Tool free installation with wedges sliding inside the body
- Clamp made of weather and UV resistant polymer

Model	Cable Range (in sq.mm)	Load (kN)	PCN	List Price (INR) Per Unit
Suspension Clamp (boltless type)	18 - 25	3	AJA4040220	285
Accessories - Service Clamp SS bracket	-	-	AJA4030004	105

Accessories





Model	Cable Range (in sq.mm)	Strap dimension (Width x Thickness) in mm	Roll Length (meter)	PCN	List Price (INR) Per Unit
SS Steel Strap	Roll without Casing	20 x 0.7	50	AJA4040025	9200
	Roll with Casing	20 x 0.7	50	AJA4040359	6460
	Buckle for Strap	-	-	AJA4040005	28
Al Bracket for Clamp	Suspension type	-	-	AJA4040593	430
Anchor Clamp (Bolted type)	Anchor type	-	-	AJA4040132	470
Nylon Cable Tie	-	-	03	AJA4040008	24

CONNECTORS & FITTINGS FOR LV ABC

Waterproof Insulation Piercing Connectors (IPC)



- Conforms to NFC 33020 and EN 50483-4 Standards
- Components are not losable, end cap attached to body
- Insulation material made of weather and UV resistant glass fibreeinforced polymer
- Contact plates made of aluminium or copper, bolt made of steel with Geomet (Chromium free) protection

Model	Blade Material	Main Cable Size (in sq mm.)	Tap Cable Size (in sq mm.)	PCN	List Price (INR) Per Unit
IPC	Aluminium	16-95	4-50	AJA4040169	220
		16-95	16- 95	AJA4040177	380
		35-150	6-50	AJA4040176	205
		35-150	35-150	AJA4040114	460
	Tin plated Copper	16-95	1.5-10	AJA4040115	200
		16-95	6-25	AJA4040331	140
		16-95	4-50	AJA4040458	410
		16-95	16-95	AJA4040457	1030
		35-150	35-150	AJA4040217	995

Waterproof Pre-insulated Hexagonal Compression Connectors - Model MJPT




- Conforms to NFC 33-021 and EN 50483-4 Standards
- A colour code of elastomeric sealing ring allows an easy identification of the cross sections
- Inner aluminium sleeve filled with contact grease
- Insulation material made of weather and UV resistant polymer

Model	Cable Range (in sq.mm)	Colour Code	PCN	List Price (INR) Per Unit
MJPT	16	Blue	AJA4030027	215
	25	Orange	AJA4030028	215
	35	Red	AJA4030029	215
	50	Yellow	AJA4030031	215
	70	White	AJA4030034	215
	95	Grey	AJA4030135	260
	120	Pink	AJA4030101	1200

CONNECTORS & FITTINGS FOR LV ABC

Eye Hook

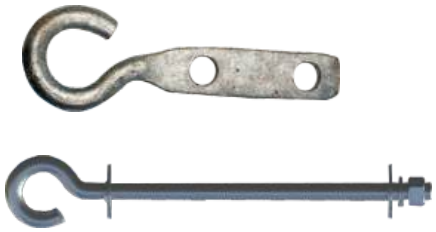

- Galvanized steel bolted and flat type
- Suitable for horizontal and vertical application

Model	Load (KN)	PCN	List Price (INR) Per Unit
Flat Eye Hook	9	AJA4040013	260
	13	AJA4040254	400
	20	AJA4040014	465
Bolted Eye Hook	12	AJA4040007	540
	18	AJA4040012	555
Pole Clamp (Rectangular)	-	AJA4040023	1280

Waterproof Pre-insulated Hexagonal Compression Bi-metallic Lugs - Model CPTAU



- Conforms to NFC 33021 and EN 50483-4 Standards
- A colour code of elastomeric sealing ring allows an easy identification of the cross sections
- Inner aluminium sleeve filled with contact grease
- Insulation material made of weather and UV resistant polymer

Model	Cable Range (in sq.mm)	Colour Code	PCN	List Price (INR) Per Unit
CPTAU	16	Blue	AJA4030010	935
	25	Orange	AJA4030011	935
	35	Red	AJA4030012	935
	50	Yellow	AJA4030013	935
	70	White	AJA4030014	935
	95	Grey	AJA4030105	935
	120	Pink	AJA4030112	2840

End Caps



- The elastomeric end caps are pre-moulded and simply pushed over the conductors
- These end caps are made of thermoplastic UV-resistant material

Model	Cable Range (in sq.mm)	Cable Dia. (mm)	PCN	List Price (INR) Per Unit
End Caps	6 - 150	6.5 – 19.0	AJA4040118	22

Raychem RPG

MARKET LEADERS FOR GENERATION



1.1 kV **CABLE ACCESSORIES** **245 kV**

for electrical power industry in India and SAARC countries, from Low voltage 1.1 kV to Extra high voltage upto 245kV

NEXT-GENERATION LOW VOLTAGE COLD APPLIED JOINT



- **SHORTER** PIT LENGTH
- **NO GAS TORCH** REQUIRED
- **2-YEAR** SHELF LIFE
- **20% FASTER** INSTALLATION

SUPPLY RESTORED **IN JUST 15 MINS**

Why wait? Contact us now.


Follow us on:

Raychem RPG



Open your world to Raychem RPG's Ampact Tap Connectors

Fired Wedge Connector | Universal Distribution Connector | Mini Wedge Connector

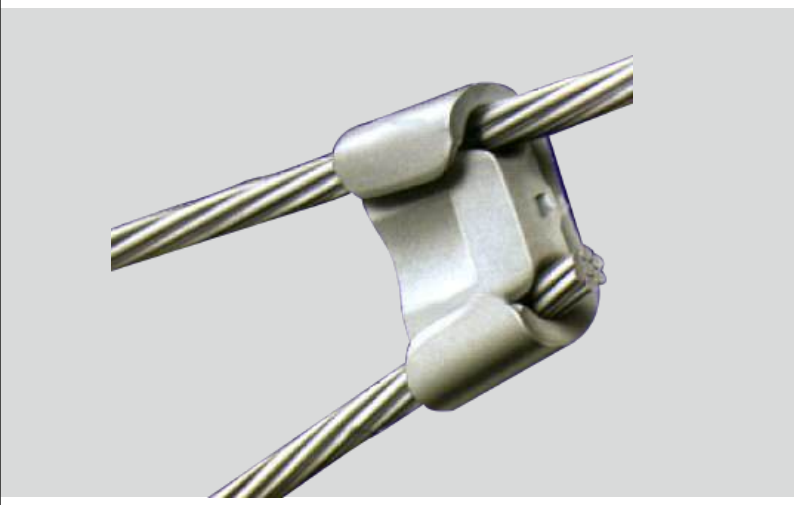

So, you save time, money & gain a host of benefits

Look at the Benefits you reap when select AMPACT connectors...

AMPACT tap connectors use the action of a metal wedge to secure the two conductors to be connected at opposing ends of the C-clamp.

The wedge is inserted at a very high-speed using the AMPACT connector tool.

High-speed insertion is very effective in abrading all sliding surfaces and in disrupting surface oxide film to generate large numbers of contact spots in the electrical interfaces.


What's more,
AMPACT taps can be used to connect multiple conductor combinations,
It's Boltless and re-usable two-piece connector

Why wait? Contact us now.

Follow us on:

TAP CONNECTORS FOR BARE OVERHEAD CONDUCTOR

Fired Mini Wedge & Fired Wedge Connector

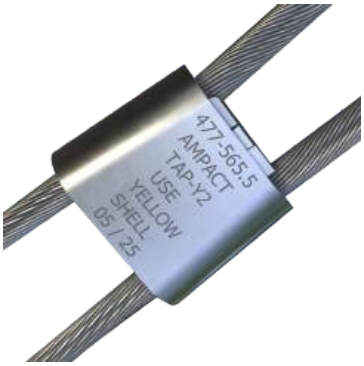


- Conforms to IS 5561 & ANSI C 119.4 (class AA)
- Taps can be used to connect multiple conductor combinations
- Re-usable two-piece connector
- Boltless & Maintenance free connection
- Smart "C" member with elastic property ensure constant force throughout the life
- The wedge is inserted at a very high-speed using the AMPACT connector tool & booster
- C body & wedge surface is coated by special inhibitor compound

Model	Type of Al Conductor Combination	Conductor Dia. (in mm)	PCN	List Price (INR) Per Unit
Fired Wedge Connector (Al)	DOG-DOG	14.15-14.15	AJA4010014	1400
	COYOTE-DIA.12PADDLE	15.89-12		
	RACOON-RACOON	12.27-12.27	AJA4010016	1550
	DOG-RABBIT	14.15-10.05		
	DOG-DIA.12PADDLE	14.15-12		
	DOG-DOG	14.15-14.15		
	LEOPARD-LEOPARD	15.81-15.81	AJA4010013	1600
	COYOTE-COYOTE	15.89-15.89		
	RABBIT-DIA.12PADDLE	10.05-12	AJA4010012	3120
	RABBIT-COYOTE	10.05-15.89		
	WOLF-DOG	18.14-14.15	AJA4010019	4130
	PANTHER-DOG	21-14.15		
	LYNX-LYNX	19.53-19.53	AJA4010020	4290
	PANTHER-DIA.18PADDLE	21-18		
	PANTHER-PANTHER	21-21		
	WOLF-DIA.18PADDLE	18.14-18	AJA4010017	4440
	WOLF-WOLF	18.14-18.14		
	WOLF-LYNX	18.14-19.53		
	LYNX-COYOTE	19.53-15.89		
	LYNX-DIA.18PADDLE	19.53-18		
	LYNX-LYNX	19.53-19.53		
	DRAKE-COYOTE	28.13-15.89	AJA4010029	4970
	ZEBRA-COYOTE	28.62-15.89		
	KUNDAH-ZEBRA	26.8-28.62	AJA4010109	5040
	DRAKE-DRAKE	28.13-28.13		
	ZEBRA-ZEBRA	28.62-28.62		
	ZEBRA-DIA.27PADDLE	28.62-27		
	DRAKE-DIA.27PADDLE	28.13-27		
	MOOSE-ZEBRA	31.77-28.62	AJA4010025	6370
	MOOSE-DRAKE	31.77-28.13		
	MOOSE-DIA.27PADDLE	31.77-27		
	MORKULLA-ZEBRA	31.6-28.62		
	MOOSE-KUNDAH	31.77-26.8		
	MOOSE-BERSIMIS	31.77-35.05	AJA4010105	6530
	TARANTULA-ZEBRA	36.62-28.62		
	FALCON-DRAKE	39.24-28.13		

TAP CONNECTORS FOR BARE OVERHEAD CONDUCTOR

Fired Mini Wedge & Fired Wedge Connector

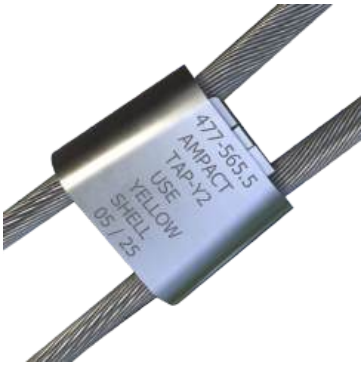


- Conforms to IS 5561 & ANSI C 119.4 (class AA)
- Taps can be used to connect multiple conductor combinations
- Re-usable two-piece connector
- Boltless & Maintenance free connection
- Smart "C" member with elastic property ensure constant force throughout the life
- The wedge is inserted at a very high-speed using the AMPACT connector tool & booster
- C body & wedge surface is coated by special inhibitor compound

Model	Type of Al Conductor Combination	Conductor Dia. (in mm)	PCN	List Price (INR) Per Unit
Fired Wedge Connector (Al)	TARANTULA-MOOSE	36.62-31.77	AJA4010106	6800
	FALCON-MOOSE	39.24-31.77		
	DRAKE-PANTHER	28.13-21	AJA4010022	7170
	DRAKE-LYNX	28.13-19.53		
	DEER-PANTHER	29.89-21		
	ZEBRA-PANTHER	28.62-21		
	MORKULLA-MORKULLA	31.6-31.6	AJA4010110	7280
	SNOWBIRD-SNOWBIRD	30.56-30.56		
	MOOSE-MOOSE	31.77-31.77		
	TARANTULA-WOLF	36.62-18.14	AJA4010146	7830
	TARANTULA-PANTHER	36.62-21		
	TARANTULA-TARANTULA	36.62-36.62	AJA4010112	8130
	LAPWING-LAPWING	38.2-38.2		
	FALCON-FALCON	39.24-39.24		
	DOG-ZEBRA	14.15-28.62	AJA4010030	8910
	GOAT-DIA.18PADDLE	25.97-18		
	MOOSE-LYNX	31.77-19.53	AJA4010063	9550
	MOOSE-PANTHER	31.77-21		
	GOAT-GOAT	25.97-25.97	AJA4010026	10550
	KUNDAH-KUNDAH	26.8-26.8		
	KUNDAH-DIA.27PADDLE	26.8-27		
	MOOSE-DOG	31.77-14.15	AJA4010093	11400
	GOAT-PANTHER	25.97-21	AJA4010028	11550
	ZEBRA-WOLF	28.62-18.14		
	DRAKE-LYNX	28.13-19.53		
	ZEBRA-LYNX	28.62-19.53		
	BERSIMIS-DRAKE	35.05-28.13	AJA4010149	11850
	BERSIMIS-ZEBRA	35.05-28.62		

TAP CONNECTORS FOR BARE OVERHEAD CONDUCTOR

Fired Mini Wedge Connector





Model	Type of Al Conductor Combination	Conductor (in sq.mm.)	PCN	List Price (INR) Per Unit
Mini Wedge (Al)	RACCON-DOG	12.27-14.15/	AJA4010167	1550
	DOG-DOG	14.15-14.15		
	RACCON-RABBIT	14.15-14.15	AJA4030023	1550
	RACCON-WEASEL	12.27-7.77	AJA4010067	1740
	50-70 SQ. MM-50-70 SQ. MM	9-10.5	AJA4030320	1000

Universal Distribution Connector



Model	Type of Al Conductor Combination	Conductor (in sq.mm.)	PCN	List Price (INR) Per Unit
UDC (Al)	WEASEL-WEASEL	7.77-7.77	AJA4010162	445
	ANT-ANT	9.3-9.3	AJA4010137	540
UDC Tinplated CU (Al)	GNAT-GNAT	6.63-6.63	AJA4010107	725
	WEASEL-WEASEL	7.77-7.77	AJA4010108	970
	ANT-ANT	9.3-9.3	AJA4010035	970
	RABBIT-RABBIT	10.05-10.05	AJA4010094	1160

TAP CONNECTORS FOR BARE OVERHEAD CONDUCTOR

AMPACT Accessories



- Paddle connectors are used to connect Ampact connector to equipment pad / palm connector
- Palm connectors are used to connect Equipment Cu studs with paddle connector

Model	Groove Dia. (in mm)	Current Rating (A)	PCN	List Price (INR) Per Unit
Paddle (Al)	12	610	AJA4010043	790
	18	895	AJA4010070	1190
	27	1400	AJA4030054	1930

Model	Equipment Cu Stud Dia. (in mm)	PCN	List Price (INR) Per Unit
Palm Connector (Brass)	22	AJA4040066	11250
	30	AJA4040089	11550
	38	AJA4040101	12450
	40	AJA4040019	13050
	50	AJA4040090	13650

ENCLOSURES



ALUMINIUM ENCLOSURES

Industrial Enclosures



- Material provide high impact strength and rigidity
- Superior working temperature of -40^0 C to 135^0 C
- Excellent dimensional stability and electrical properties
- Good resistance to chemical attack (painted)
- Good heat sinks properties

Technical Data	
Material	AlSi12, as per DIN EN 1706
Components	Fastening threads M4 / M6 in the enclosure bottom
Lid Screw	Stainless Steel, Captive Screw
Tightening Torque	5 Nm
Gasket	Neoprene / Silicone
Mechanical Strength	Accordance With EN/IEC 60079-0, Impact energy > 7 Nm
Protection Class	IEC/EN 60529, IP 66
Standard Color	Natural / Powder coated (RAL7001 - Structured)
Certified	CE UL

ALUMINIUM ENCLOSURES

Model	Size (l x b x h)	Colour	Gasket	PCN	List Price (INR) Per Unit
AL	50 x 45 x 30	Uncoated	Neoprene	DAA4000532	490
			Silicone	DAA4100174	490
		Powder Coated	Neoprene	DAA4100001	550
			Silicone	DAA4100195	550
	98 x 64 x 34	Uncoated	Neoprene	DAA4100064	920
			Silicone	DAA4100176	945
		Powder Coated	Neoprene	DAA4100012	1060
			Silicone	DAA4100197	1090
	150 x 64 x 34	Uncoated	Neoprene	DAA4100065	1560
			Silicone	DAA4100177	1580
		Powder Coated	Neoprene	DAA4100022	1780
			Silicone	DAA4100198	1800
	58 x 64 x 34	Uncoated	Neoprene	DAA4100066	675
			Silicone	DAA4100175	690
		Powder Coated	Neoprene	DAA4100087	780
			Silicone	DAA4100196	795
	75 x 80 x 57	Uncoated	Neoprene	DAA4100018	1160
			Silicone	DAA4100178	1190
		Powder Coated	Neoprene	DAA4100056	1350
			Silicone	DAA4100199	1380
	125 x 80 x 57	Uncoated	Neoprene	DAA4100019	1480
			Silicone	DAA4100179	1510
		Powder Coated	Neoprene	DAA4100006	1750
			Silicone	DAA4100200	1780
	175 x 80 x 57	Uncoated	Neoprene	DAA4100036	2050
			Silicone	DAA4100180	2130
		Powder Coated	Neoprene	DAA4100032	2410
			Silicone	DAA4100493	2490
	250 x 80 x 54	Uncoated	Neoprene	DAA4100226	2630
			Silicone	DAA4100181	2690
		Powder Coated	Neoprene	DAA4100149	3100
			Silicone	DAA4100379	3160
	100 x 100 x 81	Uncoated	Neoprene	DAA4100073	2470
			Silicone	DAA4100182	2500
		Powder Coated	Neoprene	DAA4100057	2800
			Silicone	DAA4100543	2830
	160 x 100 x 81	Uncoated	Neoprene	DAA4100029	2910
			Silicone	DAA4100183	2930
		Powder Coated	Neoprene	DAA4100058	3380
			Silicone	DAA4100616	3400
	122 x 120 x 81	Uncoated	Neoprene	DAA4100068	3280
			Silicone	DAA4100184	3300
		Powder Coated	Neoprene	DAA4100011	3740
			Silicone	DAA4100205	3760
	220 x 120 x 90	Uncoated	Neoprene	DAA4100069	4930
			Silicone	DAA4100187	5020
		Powder Coated	Neoprene	DAA4100085	5660
			Silicone	DAA4100498	5750

ALUMINIUM ENCLOSURES

Model	Size (l x b x h)	Colour	Gasket	PCN	List Price (INR) Per Unit
AL	260 x 160 x 90	Uncoated	Neoprene	DAA4100037	6650
			Silicone	DAA4100189	6700
		Powder Coated	Neoprene	DAA4100041	7660
			Silicone	DAA4100495	7710
	360 x 160 x 90	Uncoated	Neoprene	DAA4100104	8840
			Silicone	DAA4100190	8890
		Powder Coated	Neoprene	DAA4100081	10200
			Silicone	DAA4100496	10250
	280 x 230 x 110	Uncoated	Neoprene	DAA4100071	8520
			Silicone	DAA4100191	8600
		Powder Coated	Neoprene	DAA4100047	10050
			Silicone	DAA4100212	10150
	330 x 230 x 110	Uncoated	Neoprene	DAA4100160	10800
			Silicone	DAA4100193	10900
		Powder Coated	Neoprene	DAA4100059	12550
			Silicone	DAA4100214	12650
	200 x 230 x 110	Uncoated	Neoprene	DAA4100079	7540
			Silicone	DAA4100192	7620
		Powder Coated	Neoprene	DAA4100086	8750
			Silicone	DAA4100213	8830
	330 x 230 x 180	Uncoated	Neoprene	DAA4100080	14600
			Silicone	DAA4100194	14700
		Powder Coated	Neoprene	DAA4100083	16850
			Silicone	DAA4100215	17000
	220 x 120 x 81	Uncoated	Neoprene	DAA4100153	4650
			Silicone	DAA4100186	4750
		Powder Coated	Neoprene	DAA4100045	5340
			Silicone	DAA4100207	5440
	122 x 120 x 91	Uncoated	Neoprene	DAA4100150	3440
			Silicone	DAA4100185	3460
		Powder Coated	Neoprene	DAA4100094	3930
			Silicone	DAA4100494	3950
	180 x 180 x 100	Uncoated	Neoprene	DAA4100330	6110
			Silicone	DAA4101449	6310
		Powder Coated	Neoprene	DAA4100279	7000
			Silicone	DAA4100634	7200
	280 x 180 x 100	Uncoated	Neoprene	DAA4100332	8260
			Silicone	DAA4101450	8470
		Powder Coated	Neoprene	DAA4100290	9490
			Silicone	DAA4101429	9700
	200 x 230 x 180	Uncoated	Neoprene	DAA4100224	11250
			Silicone	DAA4100312	11300
		Powder Coated	Neoprene	DAA4100252	12800
			Silicone	DAA4101451	14450
	400 x 310 x 110	Uncoated	Neoprene	DAA4100251	17400
			Silicone	DAA4101452	17800
		Powder Coated	Neoprene	DAA4100227	19950
			Silicone	DAA4101439	20400

ALUMINIUM ENCLOSURES

Model	Size (l x b x h)	Colour	Gasket	PCN	List Price (INR) Per Unit
AL	400 x 310 x 180	Uncoated	Neoprene	DAA4100287	33000
			Silicone	DAA4101454	33400
		Powder Coated	Neoprene	DAA4100223	36200
			Silicone	DAA4101453	36600
	600 x 310 x 110	Uncoated	Neoprene	DAA4100420	30450
			Silicone	DAA4101456	31000
		Powder Coated	Neoprene	DAA4100271	34050
			Silicone	DAA4101455	34600
	600 x 310 x 180	Uncoated	Neoprene	DAA4100436	42100
			Silicone	DAA4101458	42650
		Powder Coated	Neoprene	DAA4100270	46550
			Silicone	DAA4101457	47100
	400 x 230 x 110	Uncoated	Neoprene	DAA4100299	14250
			Silicone	DAA4100313	14650
		Powder Coated	Neoprene	DAA4100269	16300
			Silicone	DAA4100954	16700
	140 x 140 x 90	Uncoated	Neoprene	DAA4100479	4490
			Silicone	DAA4101459	4520
		Powder Coated	Neoprene	DAA4100406	5070
			Silicone	DAA4100593	5100
	200 x 140 x 90	Uncoated	Neoprene	DAA4100405	5300
			Silicone	DAA4101448	5350
		Powder Coated	Neoprene	DAA4100404	6040
			Silicone	DAA4101438	6090

ALUMINIUM ENCLOSURES

ATEX - Enclosures



- Material provide high impact strength and rigidity
- Superior working temperature of -40^0 C to 135^0 C stability and electrical properties
- Good resistance to chemical attack (painted)
- Good heat sinks properties

Technical Data	
Material	AlSi12, as per DIN EN 1706
Components	Fastening threads M4 / M6 in the enclosure bottom
Lid Screw	Stainless Steel, Captive Screw
Tightening Torque	5 Nm
Gasket	Silicone
Mechanical Strength	Accordance With EN/IEC 60079-0, Impact energy > 7 Nm
Protection Class	IEC/EN 60529, IP 66
Standard Color	Natural / Powder coated (RAL7001 - Structured)
Certified	CE UL IECEx Ex IEC

Raychem RPG



One Stop Solution for Enclosures

JnExT Range of Enclosure for different industries and applications

Aluminum | GRP | Stainless Steel | Mild Steel



Providing Safety and Reliability for protection system

Junction box is an earthed enclosure within which wires, cables and circuits can be safely connected.

Features:

- Flexible provision for Earthing, Din rail and Mounting plate
- Excellent dimensional stability and electrical properties
- Provides high resistance to corrosion and ensures performance of equipment
- Good resistance to chemical attack (painted)
- IP 66 and IP 67 & IP 68 on request

What's more,
Explore wide range of Jnext Junction box offered for circuit protection system

Why wait? Contact us now.

Follow us on:

ALUMINIUM ENCLOSURES

Model	Size (l x b x h)	Colour	Gasket	PCN	List Price (INR) Per Unit
AL - ATX	100 x 100 x 80	Uncoated	Silicone	DAA4200009	2960
		Powder Coated		DAA4200029	3320
	122 x 120 x 80	Uncoated		DAA4200011	3830
		Powder Coated		DAA4200031	4310
	122 x 120 x 90	Uncoated		DAA4200017	3990
		Powder Coated		DAA4200037	4510
	125 x 80 x 57	Uncoated		DAA4200006	1910
		Powder Coated		DAA4200026	2210
	140 x 140 x 90	Uncoated		DAA4200259	5190
		Powder Coated		DAA4100759	5800
	150 x 64 x 34	Uncoated		DAA4200004	1960
		Powder Coated		DAA4200024	2180
	160 x 100 x 80	Uncoated		DAA4200010	3440
		Powder Coated		DAA4200030	3930
	160 x 160 x 90	Uncoated		DAA4200016	5840
		Powder Coated		DAA4200036	6590
	175 x 80 x 57	Uncoated		DAA4200007	2580
		Powder Coated		DAA4200027	2950
	180 x 180 x 100	Uncoated		DAA4200251	7090
		Powder Coated		DAA4200158	8030
	200 x 140 x 90	Uncoated		DAA4200260	6060
		Powder Coated		DAA4200147	6850
	200 x 230 x 110	Uncoated		DAA4200019	8480
		Powder Coated		DAA4200039	9740
	200 x 230 x 180	Uncoated		DAA4200253	12400
		Powder Coated		DAA4200152	14050
	220 x 120 x 80	Uncoated		DAA4200012	5440
		Powder Coated		DAA4200032	6160
	220 x 120 x 90	Uncoated		DAA4200013	5720
		Powder Coated		DAA4200033	6500
	250 x 80 x 54	Uncoated		DAA4200008	3170
		Powder Coated		DAA4200028	3670
	260 x 160 x 90	Uncoated		DAA4200014	7510
		Powder Coated		DAA4200034	8580
	280 x 180 x 100	Uncoated		DAA4200252	9360
		Powder Coated		DAA4200151	10700
	280 x 230 x 110	Uncoated		DAA4200018	9530
		Powder Coated		DAA4200038	11150
	330 x 230 x 110	Uncoated		DAA4200020	11950
		Powder Coated		DAA4200040	13800
	330 x 230 x 180	Uncoated		DAA4200021	16000
		Powder Coated		DAA4200041	18350
	360 x 160 x 90	Uncoated		DAA4200015	9820
		Powder Coated		DAA4200035	11250
	400 x 230 x 110	Uncoated		DAA4200258	15950
		Powder Coated		DAA4200157	18100
	404 x 313 x 110	Uncoated		DAA4200254	19250
		Powder Coated		DAA4200153	21950
	404 x 313 x 180	Uncoated		DAA4200255	35700
		Powder Coated		DAA4200154	39100
	58 x 64 x 34	Uncoated		DAA4200002	1020
		Powder Coated		DAA4200022	1140
	600 x 310 x 110	Uncoated		DAA4200256	33200
		Powder Coated		DAA4200155	37000
	600 x 310 x 180	Uncoated		DAA4200257	45500
		Powder Coated		DAA4200156	50200
	75 x 80 x 57	Uncoated		DAA4200005	1550
		Powder Coated		DAA4200025	1750
	98 x 64 x 34	Uncoated		DAA4200003	1300
		Powder Coated		DAA4200023	1450

GRP ENCLOSURES

Industrial Enclosures



- Fibre Glass, a thermoset polyester material reinforced with fibre glass
- Superior working temperature of -60^0 C to 110^0 C
- Flexible provision for Earthing, Din rail and Mounting plate
- IP 66 and IP 67 & IP 68 on request

Technical Data	
Material	Glass reinforced polyester
Flammability	V0 / self-extinguishing, UL 94
Gasket	Silicone / Neoprene
Mechanical Strength	Accordance With EN/IEC 60079-0, Impact energy > 7 Nm
Protection Class	IP 66 to IEC/EN 60529
Standard Color	RAL 7000 / RAL9011
Certified	CE UL

GRP ENCLOSURES

Model	Size (l x b x h)	Colour	Gasket	PCN	List Price (INR) Per Unit
GR	80 X 75 X 55	Black	Neoprene	DAA4300032	1140
			Silicone	DAA4300049	1180
		Grey	Neoprene	DAA4300001	1030
			Silicone	DAA4300017	1060
	110 X 75 X 55	Black	Neoprene	DAA4300034	1500
			Silicone	DAA4300050	1560
		Grey	Neoprene	DAA4300002	1360
			Silicone	DAA4300018	1400
	122 X 120 X 90	Black	Neoprene	DAA4300035	2330
			Silicone	DAA4300051	2400
		Grey	Neoprene	DAA4300003	2060
			Silicone	DAA4300019	2110
	80 X 75 X 75	Black	Neoprene	DAA4300198	1310
			Silicone	DAA4300204	1360
		Grey	Neoprene	DAA4100881	1180
			Silicone	DAA4300476	1210
	160 X 75 X 55	Black	Neoprene	DAA4300037	1790
			Silicone	DAA4300053	1860
		Grey	Neoprene	DAA4300005	1610
			Silicone	DAA4300021	1670
	160 X 75 X 75	Black	Neoprene	DAA4300038	1920
			Silicone	DAA4300054	1990
		Grey	Neoprene	DAA4300006	1720
			Silicone	DAA4300022	1770
	160 X 160 X 90	Black	Neoprene	DAA4300039	3380
			Silicone	DAA4300055	3470
		Grey	Neoprene	DAA4300007	2920
			Silicone	DAA4300023	2980
	110 X 75 X 75	Black	Neoprene	DAA4300199	1660
			Silicone	DAA4300205	1710
		Grey	Neoprene	DAA4100882	1490
			Silicone	DAA4300477	1530
	190 X 75 X 55	Black	Neoprene	DAA4300041	1690
			Silicone	DAA4300057	1770
		Grey	Neoprene	DAA4300009	1490
			Silicone	DAA4300025	1550
	190 X 75 X 75	Black	Neoprene	DAA4300197	1950
			Silicone	DAA4300203	2030
		Grey	Neoprene	DAA4100883	1720
			Silicone	DAA4300478	1780
	220 X 120 X 90	Black	Neoprene	DAA4300043	3430
			Silicone	DAA4300059	3530
		Grey	Neoprene	DAA4300011	3010
			Silicone	DAA4300027	3100
	255 X 250 X 120	Black	Neoprene	DAA4300044	6750
			Silicone	DAA4300060	6900
		Grey	Neoprene	DAA4300012	5670
			Silicone	DAA4300033	5780

GRP ENCLOSURES

Model	Size (l x b x h)	Colour	Gasket	PCN	List Price (INR) Per Unit
GR	260 X 160 X 90	Black	Neoprene	DAA4300045	4760
			Silicone	DAA4300061	4890
		Grey	Neoprene	DAA4300013	4090
			Silicone	DAA4300028	4190
	360 X 160 X 90	Black	Neoprene	DAA4300046	5960
			Silicone	DAA4300062	6120
		Grey	Neoprene	DAA4300014	5120
			Silicone	DAA4300029	5250
	400 X 250 X 120	Black	Neoprene	DAA4300047	9650
			Silicone	DAA4300063	9850
		Grey	Neoprene	DAA4300015	8270
			Silicone	DAA4300030	8440
	400 X 405 X 120	Black	Neoprene	DAA4300048	13400
			Silicone	DAA4300064	13650
		Grey	Neoprene	DAA4300016	11350
			Silicone	DAA4300031	11550
	255 X 250 X 160	Black	Neoprene	DAA4300200	4990
			Silicone	DAA4300206	5130
		Grey	Neoprene	DAA4100884	6980
			Silicone	DAA4300479	7110
	400 X 250 X 161	Black	Neoprene	DAA4300201	11950
			Silicone	DAA4300207	12150
		Grey	Neoprene	DAA4100885	10250
			Silicone	DAA4300480	10400
	406 X 401 X 201	Black	Neoprene	DAA4101095	16700
			Silicone	DAA4300208	16950
		Grey	Neoprene	DAA4100886	14200
			Silicone	DAA4300481	14400
	600 X 250 X 120	Black	Neoprene	DAA4300196	14000
			Silicone	DAA4300209	14300
		Grey	Neoprene	DAA4100887	12000
			Silicone	DAA4300482	12250
	600 X 250 X 161	Black	Neoprene	DAA4300202	16100
			Silicone	DAA4300210	16350
		Grey	Neoprene	DAA4100888	13650
			Silicone	DAA4300483	13900

GRP ENCLOSURES

ATEX - Enclosures



- Fibre Glass, a thermoset polyester material reinforced with fibre glass
- Superior working temperature of -60° C to 110° C
- Flexible provision for Earthing, Din rail and Mounting plate
- IP 66 and IP 67 & IP 68 on request

Technical Data	
Material	Glass reinforced polyester, Graphite added
Flammability	Self Extinguishing, UL 94 V0
Gasket	Silicone
Mechanical Strength	Accordance With EN/IEC 60079-0, Impact energy > 7 Nm
Protection Class	IP 66 to IEC/EN 60529
Standard Color	RAL 9011 / Black
Certified	EAC IECEx Ex IEC

GRP ENCLOSURES

Model	Size (l x b x h)	Colour	Gasket	PCN	List Price (INR) Per Unit
GR - ATX	80 X 75 X 55	Black	Silicone	DAA4400001	840
	80 X 75 X 75			DAA4400046	960
	110 X 75 X 55			DAA4400002	1090
	110 X 75 X 75			DAA4400047	1190
	122 X 120 X 90			DAA4400003	1650
	160 X 75 X 55			DAA4400004	1300
	160 X 75 X 75			DAA4400005	1380
	160 X 160 X 90			DAA4400006	2360
	190 X 75 X 55			DAA4400007	1860
	190 X 75 X 75			DAA4400048	2130
	220 X 120 X 90			DAA4400008	3630
	255 X 250 X 120			DAA4400009	7000
	255 X 250 X 160			DAA4400049	5230
	260 X 160 X 90			DAA4400011	4980
	360 X 160 X 90			DAA4400012	6210
	400 X 250 X 120			DAA4400013	9940
	400 X 250 X 161			DAA4400050	12200
	400 X 405 X 120			DAA4400014	13750
	406 X 401 X 201			DAA4400051	17050
	600 X 250 X 120			DAA4400052	14400
	600 X 250 X 161			DAA4400053	16450

Raychem RPG

JnExT



Manufacturer of vast range of enclosures with designs for industrial and hazardous enclosures



Customised range of Stainless steel and Mild steel enclosures

Stainless steel and Mild steel enclosures

Features:

- Stainless steel's ability to resist corrosion comes from its chemical composition
- Superior working temperature of -20 degree Celsius to 80 degree Celsius
- Excellent dimensional stability and electrical properties
- Provides high resistance to corrosion and ensures performance of equipment

Why wait?
Kindly contact nearest branch for customized requirements

Why wait? Contact us now.

Follow us on:

ELECTRICAL SAFETY



Raychem RPG

Powering Safety, Protecting Lives

Elevate electrical safety, with our offerings



Why wait? Contact us now.

Follow us on:

ELECTRICAL SAFETY PRODUCTS

KL Series Electrical Insulating Gloves - Class 00 - **Model - KL-A**



- Conforms to EN 60903:2003, IEC 60903:2014, IEC 61482-1-2 and IS 13774:2021 standards
- The ergonomic design offers extended comfort for the wearer, while its thickness guarantees dexterity
- Made from natural rubber latex for maximum durability and flexibility, it offers an ultimate fit, comfort, and performance for the safety and protection of electrical workers
- Classification Type: Class 00, Maximum working voltage: 500 VAC and 750 VDC
- Withstand Voltage: 5 kVAC; Proof Test Voltage: 2.5 kVAC
- Color: Red, Category: AZC, Sizes: 7, 8, 9, 10, 11 & 12
- REACH compliant, Powder-free, **Arc Flash - Box Tested**

Classification	Length	Size	Straight Cuff				Rolled Edge			
			PCN	Product Code	List Price (INR) Per Pair	MOQ	PCN	Product Code	List Price (INR) Per Pair	MOQ
Class 00	280mm	7	**DEA0010506**	1128000-07	**3300**	**1 Pair**	**DEA0010541**	2128000-07	**3400**	**50 Pair**
		8	**DEA0010003**	1128000-08	**3300**	**1 Pair**	**DEA0010018**	2128000-08	**3400**	**50 Pair**
		9	**DEA0010004**	1128000-09	**3300**	**1 Pair**	**DEA0010019**	2128000-09	**3400**	**50 Pair**
		10	**DEA0010005**	1128000-10	**3300**	**1 Pair**	**DEA0010020**	2128000-10	**3400**	**50 Pair**
		11	**DEA0010006**	1128000-11	**3300**	**1 Pair**	**DEA0010021**	2128000-11	**3400**	**50 Pair**
		12	**DEA0010007**	1128000-12	**3300**	**1 Pair**	**DEA0010022**	2128000-12	**3400**	**50 Pair**
	360mm	7	**DEA0010507**	1136000-07	**3300**	**1 Pair**	**DEA0010542**	2136000-07	**3400**	**50 Pair**
		8	**DEA0010013**	1136000-08	**3300**	**1 Pair**	**DEA0010023**	2136000-08	**3400**	**50 Pair**
		9	**DEA0010014**	1136000-09	**3300**	**1 Pair**	**DEA0010024**	2136000-09	**3400**	**50 Pair**
		10	**DEA0010015**	1136000-10	**3300**	**1 Pair**	**DEA0010025**	2136000-10	**3400**	**50 Pair**
		11	**DEA0010016**	1136000-11	**3300**	**1 Pair**	**DEA0010026**	2136000-11	**3400**	**50 Pair**
		12	**DEA0010017**	1136000-12	**3300**	**1 Pair**	**DEA0010027**	2136000-12	**3400**	**50 Pair**

ELECTRICAL SAFETY PRODUCTS

KL Series Electrical Insulating Gloves - Class 0 - **Model - KL-B**



- Conforms to EN 60903:2003, IEC 60903:2014, IEC 61482-1-2 and IS 13774:2021 standards
- The ergonomic design offers extended comfort for the wearer, while its thickness guarantees dexterity
- Made from natural rubber latex for maximum durability and flexibility, it offers an ultimate fit, comfort, and performance for the safety and protection of electrical workers
- Classification Type: Class 0, Maximum working voltage: 1000 VAC and 1500 VDC
- Withstand Voltage: 10 kVAC; Proof Test Voltage: 5 kVAC
- Color: Red, Category: RC, Sizes: 7, 8, 9, 10, 11 & 12
- REACH compliant, Powder-free, **Arc Flash - Box Tested**

Classification	Length	Size	Straight Cuff				Rolled Edge			
			PCN	Product Code	List Price (INR) Per Pair	MOQ	PCN	Product Code	List Price (INR) Per Pair	MOQ
Class 0	280mm	7	**DEA0010508**	1128010-07	**3950**	**1 Pair**	**DEA0010543**	2128010-07	**4100**	**50 Pair**
		8	**DEA0010185**	1128010-08	**3950**	**1 Pair**	**DEA0010195**	2128010-08	**4100**	**50 Pair**
		9	**DEA0010186**	1128010-09	**3950**	**1 Pair**	**DEA0010196**	2128010-09	**4100**	**50 Pair**
		10	**DEA0010187**	1128010-10	**3950**	**1 Pair**	**DEA0010197**	2128010-10	**4100**	**50 Pair**
		11	**DEA0010188**	1128010-11	**3950**	**1 Pair**	**DEA0010198**	2128010-11	**4100**	**50 Pair**
		12	**DEA0010189**	1128010-12	**3950**	**1 Pair**	**DEA0010199**	2128010-12	**4100**	**50 Pair**
	360mm	7	**DEA0010509**	1136010-07	**3950**	**1 Pair**	**DEA0010544**	2136010-07	**4100**	**50 Pair**
		8	**DEA0010028**	1136010-08	**3950**	**1 Pair**	**DEA0010008**	2136010-08	**4100**	**50 Pair**
		9	**DEA0010029**	1136010-09	**3950**	**1 Pair**	**DEA0010009**	2136010-09	**4100**	**50 Pair**
		10	**DEA0010030**	1136010-10	**3950**	**1 Pair**	**DEA0010010**	2136010-10	**4100**	**50 Pair**
		11	**DEA0010031**	1136010-11	**3950**	**1 Pair**	**DEA0010011**	2136010-11	**4100**	**50 Pair**
		12	**DEA0010032**	1136010-12	**3950**	**1 Pair**	**DEA0010012**	2136010-12	**4100**	**50 Pair**
	410mm	7	**DEA0010510**	1141010-07	**3950**	**1 Pair**	**DEA0010545**	2141010-07	**4100**	**50 Pair**
		8	**DEA0010033**	1141010-08	**3950**	**1 Pair**	**DEA0010117**	2141010-08	**4100**	**50 Pair**
		9	**DEA0010034**	1141010-09	**3950**	**1 Pair**	**DEA0010118**	2141010-09	**4100**	**50 Pair**
		10	**DEA0010035**	1141010-10	**3950**	**1 Pair**	**DEA0010119**	2141010-10	**4100**	**50 Pair**
		11	**DEA0010036**	1141010-11	**3950**	**1 Pair**	**DEA0010120**	2141010-11	**4100**	**50 Pair**
		12	**DEA0010037**	1141010-12	**3950**	**1 Pair**	**DEA0010121**	2141010-12	**4100**	**50 Pair**

ELECTRICAL SAFETY PRODUCTS

KL Series Electrical Insulating Gloves - Class 1 - **Model - KL-C**



CE 2777 Arc Flash-Box Tested IEC-61482-1-2: 2014

- Conforms to EN 60903:2003, IEC 60903:2014, IEC 61482-1-2 and IS 13774:2021 standards
- The ergonomic design offers extended comfort for the wearer, while its thickness guarantees dexterity
- Made from natural rubber latex for maximum durability and flexibility, it offers an ultimate fit, comfort, and performance for the safety and protection of electrical workers
- Classification Type: Class 1, Maximum working voltage: 7500 VAC and 11250 VDC
- Withstand Voltage: 20 kVAC; Proof Test Voltage: 10 kVAC
- Color: Red, Category: RC, Sizes: 7, 8, 9, 10, 11 & 12
- REACH compliant, Powder-free, **Arc Flash - Box Tested**

Classification	Length	Size	Straight Cuff				Rolled Edge			
			PCN	Product Code	List Price (INR) Per Pair	MOQ	PCN	Product Code	List Price (INR) Per Pair	MOQ
Class 1	360mm	7	DEA0010511	1136011-07	5750	1 Pair	DEA0010546	2136011-07	5900	50 Pair
		8	DEA0010038	1136011-08	5750	1 Pair	DEA0010043	2136011-08	5900	50 Pair
		9	DEA0010039	1136011-09	5750	1 Pair	DEA0010044	2136011-09	5900	50 Pair
		10	DEA0010040	1136011-10	5750	1 Pair	DEA0010045	2136011-10	5900	50 Pair
		11	DEA0010041	1136011-11	5750	1 Pair	DEA0010046	2136011-11	5900	50 Pair
		12	DEA0010042	1136011-12	5750	1 Pair	DEA0010047	2136011-12	5900	50 Pair
	410mm	7	DEA0010512	1141011-07	5750	1 Pair	DEA0010547	2141011-07	5900	50 Pair
		8	DEA0010048	1141011-08	5750	1 Pair	DEA0010687	2141011-08	5900	50 Pair
		9	DEA0010049	1141011-09	5750	1 Pair	DEA0010054	2141011-09	5900	50 Pair
		10	DEA0010050	1141011-10	5750	1 Pair	DEA0010055	2141011-10	5900	50 Pair
		11	DEA0010051	1141011-11	5750	1 Pair	DEA0010056	2141011-11	5900	50 Pair
		12	DEA0010052	1141011-12	5750	1 Pair	DEA0010057	2141011-12	5900	50 Pair

KL Series Electrical Insulating Gloves - Class 2 - **Model - KL-D**



CE 2777 Arc Flash-Box Tested IEC-61482-1-2: 2014

- Conforms to EN 60903:2003, IEC 60903:2014, IEC 61482-1-2 and IS 13774:2021 standards
- The ergonomic design offers extended comfort for the wearer, while its thickness guarantees dexterity
- Made from natural rubber latex for maximum durability and flexibility, it offers an ultimate fit, comfort, and performance for the safety and protection of electrical workers
- Classification Type: Class 2, Maximum working voltage: 17000 VAC and 25500 VDC
- Withstand Voltage: 30 kVAC; Proof Test Voltage: 20 kVAC
- Color: Red, Category: RC, Sizes: 7, 8, 9, 10, 11 & 12
- REACH compliant, Powder-free, **Arc Flash - Box Tested**

Classification	Length	Size	Straight Cuff				Rolled Edge			
			PCN	Product Code	List Price (INR) Per Pair	MOQ	PCN	Product Code	List Price (INR) Per Pair	MOQ
Class 2	360mm	7	DEA0010513	1136012-07	7000	1 Pair	DEA0010548	2136012-07	7100	50 Pair
		8	DEA0010058	1136012-08	7000	1 Pair	DEA0010063	2136012-08	7100	50 Pair
		9	DEA0010059	1136012-09	7000	1 Pair	DEA0010064	2136012-09	7100	50 Pair
		10	DEA0010060	1136012-10	7000	1 Pair	DEA0010065	2136012-10	7100	50 Pair
		11	DEA0010061	1136012-11	7000	1 Pair	DEA0010066	2136012-11	7100	50 Pair
		12	DEA0010062	1136012-12	7000	1 Pair	DEA0010067	2136012-12	7100	50 Pair
	410mm	7	DEA0010503	1141012-07	7000	1 Pair	DEA0010549	2141012-07	7100	50 Pair
		8	DEA0010068	1141012-08	7000	1 Pair	DEA0010072	2141012-08	7100	50 Pair
		9	DEA0010069	1141012-09	7000	1 Pair	DEA0010073	2141012-09	7100	50 Pair
		10	DEA0010070	1141012-10	7000	1 Pair	DEA0010074	2141012-10	7100	50 Pair
		11	DEA0010071	1141012-11	7000	1 Pair	DEA0010075	2141012-11	7100	50 Pair
		12	DEA0020571	1141012-12	7000	1 Pair	DEA0010076	2141012-12	7100	50 Pair

ELECTRICAL SAFETY PRODUCTS

KL Series Electrical Insulating Gloves - Class 3 - **Model - KL-E**



CE 2777 Arc Flash-Box Tested
IEC-61482-1-2: 2014

IS 13774 : 2021
CML-7700236316

- Conforms to EN 60903:2003, IEC 60903:2014, IEC 61482-1-2 and IS 13774:2021 standards
- The ergonomic design offers extended comfort for the wearer, while its thickness guarantees dexterity
- Made from natural rubber latex for maximum durability and flexibility, it offers an ultimate fit, comfort, and performance for the safety and protection of electrical workers
- Classification Type: Class 3, Maximum working voltage: 26500 VAC and 39750 VDC
- Withstand Voltage: 40 kVAC; Proof Test Voltage: 30 kVAC
- Color: Red, Category: RC, Sizes: 8, 9, 10, 11 & 12
- REACH compliant, Powder-free, **Arc Flash - Box Tested**

Classification	Length	Size	Straight Cuff				Rolled Edge			
			PCN	Product Code	List Price (INR) Per Pair	MOQ	PCN	Product Code	List Price (INR) Per Pair	MOQ
Class 3	360mm	8	DEA0010077	1136013-08	9500	1 Pair	DEA0010082	2136013-08	9700	50 Pair
		9	DEA0010078	1136013-09	9500	1 Pair	DEA0010083	2136013-09	9700	50 Pair
		10	DEA0010079	1136013-10	9500	1 Pair	DEA0010084	2136013-10	9700	50 Pair
		11	DEA0010080	1136013-11	9500	1 Pair	DEA0010085	2136013-11	9700	50 Pair
		12	DEA0010081	1136013-12	9500	1 Pair	DEA0010086	2136013-12	9700	50 Pair
	410mm	8	DEA0010087	1141013-08	9500	1 Pair	DEA0010092	2136013-08	9700	50 Pair
		9	DEA0010088	1141013-09	9500	1 Pair	DEA0010093	2136013-09	9700	50 Pair
		10	DEA0010089	1141013-10	9500	1 Pair	DEA0010094	2136013-10	9700	50 Pair
		11	DEA0010090	1141013-11	9500	1 Pair	DEA0010095	2136013-11	9700	50 Pair
		12	DEA0010091	1141013-12	9500	1 Pair	DEA0010096	2136013-12	9700	50 Pair

KL Series Electrical Insulating Gloves - Class 4 - **Model - KL-F**



CE 2777 Arc Flash-Box Tested
IEC-61482-1-2: 2014

IS 13774 : 2021
CML-7700236316

- Conforms to EN 60903:2003, IEC 60903:2014, IEC 61482-1-2 and IS 13774:2021 standards
- The ergonomic design offers extended comfort for the wearer, while its thickness guarantees dexterity
- Made from natural rubber latex for maximum durability and flexibility, it offers an ultimate fit, comfort, and performance for the safety and protection of electrical workers
- Classification Type: Class 4, Maximum working voltage: 36000 VAC and 54500 VDC
- Withstand Voltage: 50 kVAC; Proof Test Voltage: 40 kVAC
- Color: Red, Category: RC, Sizes: 8, 9, 10, 11 & 12
- REACH compliant, Powder-free, **Arc Flash - Box Tested**

Classification	Length	Size	Straight Cuff				Rolled Edge			
			PCN	Product Code	List Price (INR) Per Pair	MOQ	PCN	Product Code	List Price (INR) Per Pair	MOQ
Class 4	410mm	8	DEA0010190	1141014-08	14000	1 Pair	DEA0010102	2141014-08	14300	50 Pair
		9	DEA0010191	1141014-09	14000	1 Pair	DEA0010103	2141014-09	14300	50 Pair
		10	DEA0010192	1141014-10	14000	1 Pair	DEA0010104	2141014-10	14300	50 Pair
		11	DEA0010193	1141014-11	14000	1 Pair	DEA0010105	2141014-11	14300	50 Pair
		12	DEA0010194	1141014-12	14000	1 Pair	DEA0010106	2141014-12	14300	50 Pair

Note : For mechanical protection from cut and abrasion, rubber gloves must be used along with leather Over gloves.

ELECTRICAL SAFETY PRODUCTS

KL-ARC Series Electrical Insulating Gloves with ARC Flash Protection - Class 00 - **Model - KL-A-ARC**



- Conforms to EN 60903:2003, IEC 60903:2014, ASTM F 2675 and IEC 61482-1-2 standards
- ASTM F2675 - ATPV / ARLim Rating: **8 cal/cm²** , IEC61482 **Box Tested - APC- 2**
- The ergonomic design offers extended comfort for the wearer, while its thickness guarantees dexterity
- Made from natural rubber latex for maximum durability and flexibility, it offers an ultimate fit, comfort, and performance for the safety and protection of electrical workers
- Classification Type: Class 00, Maximum working voltage: 500 VAC and 750 VDC
- Withstand Voltage: 10 kVAC; Proof Test Voltage: 2.5 kVAC
- Color: Red, Category: AZC, Sizes: 7, 8, 9, 10, 11 & 12
- REACH compliant, Powder-free, Arc Flash Tested

Classification	Length	Size	Straight Cuff				Rolled Edge			
			PCN	Product Code	List Price (INR) Per Pair	MOQ	PCN	Product Code	List Price (INR) Per Pair	MOQ
Class 00	280mm	7	**DEA0010516**	1228000-07	**4700**	**1 Pair**	**DEA0010553**	2228000-07	**4800**	**50 Pair**
		8	**DEA0010436**	1228000-08	**4700**	**1 Pair**	**DEA0010455**	2228000-08	**4800**	**50 Pair**
		9	**DEA0010353**	1228000-09	**4700**	**1 Pair**	**DEA0010356**	2228000-09	**4800**	**50 Pair**
		10	**DEA0010416**	1228000-10	**4700**	**1 Pair**	**DEA0010387**	2228000-10	**4800**	**50 Pair**
		11	**DEA0010371**	1228000-11	**4700**	**1 Pair**	**DEA0010430**	2228000-11	**4800**	**50 Pair**
		12	**DEA0010395**	1228000-12	**4700**	**1 Pair**	**DEA0010380**	2228000-12	**4800**	**50 Pair**
	360mm	7	**DEA0010517**	1236000-07	**4700**	**1 Pair**	**DEA0010554**	2236000-07	**4800**	**50 Pair**
		8	**DEA0010365**	1236000-08	**4700**	**1 Pair**	**DEA0010460**	2236000-08	**4800**	**50 Pair**
		9	**DEA0010438**	1236000-09	**4700**	**1 Pair**	**DEA0010375**	2236000-09	**4800**	**50 Pair**
		10	**DEA0010495**	1236000-10	**4700**	**1 Pair**	**DEA0010441**	2236000-10	**4800**	**50 Pair**
		11	**DEA0010440**	1236000-11	**4700**	**1 Pair**	**DEA0010355**	2236000-11	**4800**	**50 Pair**
		12	**DEA0010373**	1236000-12	**4700**	**1 Pair**	**DEA0010449**	2236000-12	**4800**	**50 Pair**

ELECTRICAL SAFETY PRODUCTS

KL-ARC Series Electrical Insulating Gloves with ARC Flash Protection - Class 0 - **Model - KL-B-ARC**



- Conforms to EN 60903:2003, IEC 60903:2014, ASTM F 2675 and IEC 61482-1-2 standards
- ASTM F2675 - ATPV / ARLim Rating: **14 cal/cm²**, IEC61482 **Box Tested - APC- 2**
- The ergonomic design offers extended comfort for the wearer, while its thickness guarantees dexterity
- Made from natural rubber latex for maximum durability and flexibility, it offers an ultimate fit, comfort, and performance for the safety and protection of electrical workers
- Classification Type: Class 0, Maximum working voltage: 1000 VAC and 1500 VDC
- Withstand Voltage: 10 kVAC; Proof Test Voltage: 5 kVAC
- Color: Red, Category: RC, Sizes: 7, 8, 9, 10, 11 & 12
- REACH compliant, Powder-free, Arc Flash Tested

Classification	Length	Size	Straight Cuff				Rolled Edge			
			PCN	Product Code	List Price (INR) Per Pair	MOQ	PCN	Product Code	List Price (INR) Per Pair	MOQ
Class 0	280mm	7	**DEA0010518**	1228010-07	**5500**	**1 Pair**	**DEA0010555**	2228010-07	**5650**	**50 Pair**
		8	**DEA0010362**	1228010-08	**5500**	**1 Pair**	**DEA0010360**	2228010-08	**5650**	**50 Pair**
		9	**DEA0010408**	1228010-09	**5500**	**1 Pair**	**DEA0010374**	2228010-09	**5650**	**50 Pair**
		10	**DEA0010369**	1228010-10	**5500**	**1 Pair**	**DEA0010370**	2228010-10	**5650**	**50 Pair**
		11	**DEA0010404**	1228010-11	**5500**	**1 Pair**	**DEA0010491**	2228010-11	**5650**	**50 Pair**
		12	**DEA0010314**	1228010-12	**5500**	**1 Pair**	**DEA0010424**	2228010-12	**5650**	**50 Pair**
	360mm	7	**DEA0010519**	1236010-07	**5500**	**1 Pair**	**DEA0010556**	2236010-07	**5650**	**50 Pair**
		8	**DEA0010394**	1236010-08	**5500**	**1 Pair**	**DEA0010450**	2236010-08	**5650**	**50 Pair**
		9	**DEA0010432**	1236010-09	**5500**	**1 Pair**	**DEA0010446**	2236010-09	**5650**	**50 Pair**
		10	**DEA0010350**	1236010-10	**5500**	**1 Pair**	**DEA0010433**	2236010-10	**5650**	**50 Pair**
		11	**DEA0010407**	1236010-11	**5500**	**1 Pair**	**DEA0010378**	2236010-11	**5650**	**50 Pair**
		12	**DEA0010402**	1236010-12	**5500**	**1 Pair**	**DEA0010447**	2236010-12	**5650**	**50 Pair**
	410mm	7	**DEA0010520**	1241010-07	**5500**	**1 Pair**	**DEA0010557**	2241010-07	**5650**	**50 Pair**
		8	**DEA0010451**	1241010-08	**5500**	**1 Pair**	**DEA0010498**	2241010-08	**5650**	**50 Pair**
		9	**DEA0010465**	1241010-09	**5500**	**1 Pair**	**DEA0010499**	2241010-09	**5650**	**50 Pair**
		10	**DEA0010467**	1241010-10	**5500**	**1 Pair**	**DEA0010500**	2241010-10	**5650**	**50 Pair**
		11	**DEA0010396**	1241010-11	**5500**	**1 Pair**	**DEA0010501**	2241010-11	**5650**	**50 Pair**
		12	**DEA0010461**	1241010-12	**5500**	**1 Pair**	**DEA0010502**	2241010-12	**5650**	**50 Pair**

ELECTRICAL SAFETY PRODUCTS

KL-ARC Series Electrical Insulating Gloves with ARC Flash Protection - Class 1 - **Model - KL-C-ARC**



- Conforms to EN 60903:2003, IEC 60903:2014, ASTM F 2675 and IEC 61482-1-2 standards
- ASTM F2675 - ATPV / ARLim Rating: **14 cal/cm²**, IEC61482 **Box Tested - APC- 2**
- The ergonomic design offers extended comfort for the wearer, while its thickness guarantees dexterity
- Made from natural rubber latex for maximum durability and flexibility, it offers an ultimate fit, comfort, and performance for the safety and protection of electrical workers
- Classification Type: Class 1, Maximum working voltage: 7500 VAC and 11250 VDC
- Withstand Voltage: 20 kVAC; Proof Test Voltage: 10 kVAC
- Color: Red, Category: RC, Sizes: 7, 8, 9, 10, 11 & 12
- REACH compliant, Powder-free, Arc Flash Tested

Classification	Length	Size	Straight Cuff				Rolled Edge			
			PCN	Product Code	List Price (INR) Per Pair	MOQ	PCN	Product Code	List Price (INR) Per Pair	MOQ
Class 1	360mm	7	**DEA0010521**	1236011-07	**8100**	**1 Pair**	**DEA0010558**	2236011-07	**8200**	**50 Pair**
		8	**DEA0010391**	1236011-08	**8100**	**1 Pair**	**DEA0010471**	2236011-08	**8200**	**50 Pair**
		9	**DEA0010462**	1236011-09	**8100**	**1 Pair**	**DEA0010456**	2236011-09	**8200**	**50 Pair**
		10	**DEA0010459**	1236011-10	**8100**	**1 Pair**	**DEA0010398**	2236011-10	**8200**	**50 Pair**
		11	**DEA0010401**	1236011-11	**8100**	**1 Pair**	**DEA0010457**	2236011-11	**8200**	**50 Pair**
		12	**DEA0010410**	1236011-12	**8100**	**1 Pair**	**DEA0010349**	2236011-12	**8200**	**50 Pair**
	410mm	7	**DEA0010522**	1241011-07	**8100**	**1 Pair**	**DEA0010559**	2241011-07	**8200**	**50 Pair**
		8	**DEA0010389**	1241011-08	**8100**	**1 Pair**	**DEA0010383**	2241011-08	**8200**	**50 Pair**
		9	**DEA0010458**	1241011-09	**8100**	**1 Pair**	**DEA0010415**	2241011-09	**8200**	**50 Pair**
		10	**DEA0010493**	1241011-10	**8100**	**1 Pair**	**DEA0010418**	2241011-10	**8200**	**50 Pair**
		11	**DEA0010381**	1241011-11	**8100**	**1 Pair**	**DEA0010463**	2241011-11	**8200**	**50 Pair**
		12	**DEA0010443**	1241011-12	**8100**	**1 Pair**	**DEA0010439**	2241011-12	**8200**	**50 Pair**

ELECTRICAL SAFETY PRODUCTS

KL-ARC Series Electrical Insulating Gloves with ARC Flash Protection - Class 2 - **Model - KL-D-ARC**



- Conforms to EN 60903:2003, IEC 60903:2014, ASTM F 2675 and IEC 61482-1-2 standards
- ASTM F2675 - ATPV / ARLim Rating: **16 cal/cm²**, IEC61482 **Box Tested - APC- 2**
- The ergonomic design offers extended comfort for the wearer, while its thickness guarantees dexterity
- Made from natural rubber latex for maximum durability and flexibility, it offers an ultimate fit, comfort, and performance for the safety and protection of electrical workers
- Classification Type: Class 2, Maximum working voltage: 17000 VAC and 25500 VDC
- Withstand Voltage: 30 kVAC; Proof Test Voltage: 20 kVAC
- Color: Red, Category: RC, Sizes: 7, 8, 9, 10, 11 & 12
- REACH compliant, Powder-free, Arc Flash Tested

Classification	Length	Size	Straight Cuff				Rolled Edge			
			PCN	Product Code	List Price (INR) Per Pair	MOQ	PCN	Product Code	List Price (INR) Per Pair	MOQ
Class 2	360mm	7	**DEA0010523**	1236012-07	**9850**	**1 Pair**	**DEA0010560**	2236012-07	**10000**	**50 Pair**
		8	**DEA0010453**	1236012-08	**9850**	**1 Pair**	**DEA0010400**	2236012-08	**10000**	**50 Pair**
		9	**DEA0010448**	1236012-09	**9850**	**1 Pair**	**DEA0010363**	2236012-09	**10000**	**50 Pair**
		10	**DEA0010392**	1236012-10	**9850**	**1 Pair**	**DEA0010468**	2236012-10	**10000**	**50 Pair**
		11	**DEA0010429**	1236012-11	**9850**	**1 Pair**	**DEA0010399**	2236012-11	**10000**	**50 Pair**
		12	**DEA0010357**	1236012-12	**9850**	**1 Pair**	**DEA0010359**	2236012-12	**10000**	**50 Pair**
	410mm	7	**DEA0010524**	1241012-07	**9850**	**1 Pair**	**DEA0010561**	2241012-07	**10000**	**50 Pair**
		8	**DEA0010475**	1241012-08	**9850**	**1 Pair**	**DEA0010386**	2241012-08	**10000**	**50 Pair**
		9	**DEA0010412**	1241012-09	**9850**	**1 Pair**	**DEA0010385**	2241012-09	**10000**	**50 Pair**
		10	**DEA0010406**	1241012-10	**9850**	**1 Pair**	**DEA0010388**	2241012-10	**10000**	**50 Pair**
		11	**DEA0010409**	1241012-11	**9850**	**1 Pair**	**DEA0010367**	2241012-11	**10000**	**50 Pair**
		12	**DEA0010477**	1241012-12	**9850**	**1 Pair**	**DEA0010423**	2241012-12	**10000**	**50 Pair**

ELECTRICAL SAFETY PRODUCTS

KL-ARC Series Electrical Insulating Gloves with ARC Flash Protection - Class 3 - **Model - KL-E-ARC**



- Conforms to EN 60903:2003, IEC 60903:2014, ASTM F 2675 and IEC 61482-1-2 standards
- ASTM F2675 - ATPV / ARLim Rating: **25 cal/cm²**, IEC61482 **Box Tested - APC- 2**
- The ergonomic design offers extended comfort for the wearer, while its thickness guarantees dexterity
- Made from natural rubber latex for maximum durability and flexibility, it offers an ultimate fit, comfort, and performance for the safety and protection of electrical workers
- Classification Type: Class 3, Maximum working voltage: 26500 VAC and 39750 VDC
- Withstand Voltage: 40 kVAC; Proof Test Voltage: 30 kVAC
- Color: Red, Category: RC, Sizes: 8, 9, 10, 11 & 12
- REACH compliant, Powder-free, Arc Flash Tested

Classification	Length	Size	Straight Cuff				Rolled Edge			
			PCN	Product Code	List Price (INR) Per Pair	MOQ	PCN	Product Code	List Price (INR) Per Pair	MOQ
Class 3	360mm	8	**DEA0010473**	1236013-08	**13500**	**1 Pair**	**DEA0010445**	2236013-08	**15000**	**50 Pair**
		9	**DEA0010494**	1236013-09	**13500**	**1 Pair**	**DEA0010426**	2236013-09	**15000**	**50 Pair**
		10	**DEA0010437**	1236013-10	**13500**	**1 Pair**	**DEA0010361**	2236013-10	**15000**	**50 Pair**
		11	**DEA0010366**	1236013-11	**13500**	**1 Pair**	**DEA0010478**	2236013-11	**15000**	**50 Pair**
		12	**DEA0010476**	1236013-12	**13500**	**1 Pair**	**DEA0010466**	2236013-12	**15000**	**50 Pair**
	410mm	8	**DEA0010492**	1241013-08	**13500**	**1 Pair**	**DEA0010384**	2241013-08	**15000**	**50 Pair**
		9	**DEA0010435**	1241013-09	**13500**	**1 Pair**	**DEA0010425**	2241013-09	**15000**	**50 Pair**
		10	**DEA0010377**	1241013-10	**13500**	**1 Pair**	**DEA0010382**	2241013-10	**15000**	**50 Pair**
		11	**DEA0010390**	1241013-11	**13500**	**1 Pair**	**DEA0010368**	2241013-11	**15000**	**50 Pair**
		12	**DEA0010414**	1241013-12	**13500**	**1 Pair**	**DEA0010354**	2241013-12	**15000**	**50 Pair**

ELECTRICAL SAFETY PRODUCTS

KL-ARC Series Electrical Insulating Gloves with ARC Flash Protection - Class 4 - **Model - KL-F-ARC**



- Conforms to EN 60903:2003, IEC 60903:2014, ASTM F 2675 and IEC 61482-1-2 standards
- ASTM F2675 - ATPV / ARLim Rating: **39 cal/cm²**, IEC61482 **Box Tested - APC- 2**
- The ergonomic design offers extended comfort for the wearer, while its thickness guarantees dexterity
- Made from natural rubber latex for maximum durability and flexibility, it offers an ultimate fit, comfort, and performance for the safety and protection of electrical workers
- Classification Type: Class 4, Maximum working voltage: 36000 VAC and 54500 VDC
- Withstand Voltage: 50 kVAC; Proof Test Voltage: 40 kVAC
- Color: Red, Category: RC, Sizes: 8, 9, 10, 11 & 12
- REACH compliant, Powder-free, Arc Flash Tested

Classification	Length	Size	Straight Cuff				Rolled Edge			
			PCN	Product Code	List Price (INR) Per Pair	MOQ	PCN	Product Code	List Price (INR) Per Pair	MOQ
Class 4	410mm	8	**DEA0010397**	1241014-08	**18000**	**1 Pair**	**DEA0010417**	2241014-08	**19500**	**50 Pair**
		9	**DEA0010352**	1241014-09	**18000**	**1 Pair**	**DEA0010442**	2241014-09	**19500**	**50 Pair**
		10	**DEA0010351**	1241014-10	**18000**	**1 Pair**	**DEA0010376**	2241014-10	**19500**	**50 Pair**
		11	**DEA0010470**	1241014-11	**18000**	**1 Pair**	**DEA0010421**	2241014-11	**19500**	**50 Pair**
		12	**DEA0010372**	1241014-12	**18000**	**1 Pair**	**DEA0010393**	2241014-12	**19500**	**50 Pair**

Note : For mechanical protection from cut and abrasion, rubber gloves must be used along with leather over gloves.

ELECTRICAL SAFETY PRODUCTS

KC-Composite Series Electrical Insulating Gloves with ARC Flash & Mechanical Protection - Class 00 - **Model - KC-A**





- Conforms to EN 60903:2003, IEC 60903:2014, ASTM F 2675 and IEC 61482-1-2 standards
- ASTM F2675 - ATPV / ARLim Rating: **14 cal/cm²**, IEC61482 **Box Tested - APC- 2**
- The ergonomic design offers extended comfort for the wearer, while its thickness guarantees dexterity
- Made from natural rubber latex for maximum durability and flexibility, it offers an ultimate fit, comfort, and performance for the safety and protection of electrical workers
- Classification Type: Class 00, Maximum working voltage: 500 VAC and 750 VDC
- Withstand Voltage: 5kVAC; Proof Test Voltage: 2.5 kVAC
- **Bi-Color - Red Inside & Black Outside**, Category: RC, Sizes: 7, 8, 9, 10, 11 & 12
- REACH compliant, Powder-free, Arc Flash Tested

Classification	Length	Size	Straight Cuff			
			PCN	Product Code	List Price (INR) Per Pair	MOQ
Class 00	280mm	7	**DEA0010528**	1328000-07	**6800**	**1 Pair**
		8	**DEA0010220**	1328000-08	**6800**	**1 Pair**
		9	**DEA0010222**	1328000-09	**6800**	**1 Pair**
		10	**DEA0010224**	1328000-10	**6800**	**1 Pair**
		11	**DEA0010226**	1328000-11	**6800**	**1 Pair**
		12	**DEA0010228**	1328000-12	**6800**	**1 Pair**
	360mm	7	**DEA0010529**	1336000-07	**6800**	**1 Pair**
		8	**DEA0010221**	1336000-08	**6800**	**1 Pair**
		9	**DEA0010223**	1336000-09	**6800**	**1 Pair**
		10	**DEA0010225**	1336000-10	**6800**	**1 Pair**
		11	**DEA0010227**	1336000-11	**6800**	**1 Pair**
		12	**DEA0010229**	1336000-12	**6800**	**1 Pair**

ELECTRICAL SAFETY PRODUCTS

KC-Composite Series Electrical Insulating Gloves with ARC Flash & Mechanical Protection - Class 0 - **Model - KC-B**





- Conforms to EN 60903:2003, IEC 60903:2014, ASTM F 2675 and IEC 61482-1-2 standards
- ASTM F2675 - ATPV / ARLim Rating: **25 cal/cm²**, IEC61482 **Box Tested - APC- 2**
- The ergonomic design offers extended comfort for the wearer, while its thickness guarantees dexterity
- Made from natural rubber latex for maximum durability and flexibility, it offers an ultimate fit, comfort, and performance for the safety and protection of electrical workers
- Classification Type: Class 0, Maximum working voltage: 1000 VAC and 1500 VDC
- Withstand Voltage: 10 kVAC; Proof Test Voltage: 5 kVAC
- **Bi-Color - Red Inside & Black Outside**, Category: RC, Sizes: 7, 8, 9, 10, 11 & 12
- REACH compliant, Powder-free, Arc Flash Tested

Classification	Length	Size	Straight Cuff			
			PCN	Product Code	List Price (INR) Per Pair	MOQ
Class 0	280mm	7	**DEA0010530**	1328010-07	**8500**	**1 Pair**
		8	**DEA0010245**	1328010-08	**8500**	**1 Pair**
		9	**DEA0010247**	1328010-09	**8500**	**1 Pair**
		10	**DEA0010249**	1328010-10	**8500**	**1 Pair**
		11	**DEA0010251**	1328010-11	**8500**	**1 Pair**
		12	**DEA0010253**	1328010-12	**8500**	**1 Pair**
	360mm	7	**DEA0010531**	1336010-07	**8500**	**1 Pair**
		8	**DEA0010203**	1336010-08	**8500**	**1 Pair**
		9	**DEA0010204**	1336010-09	**8500**	**1 Pair**
		10	**DEA0010205**	1336010-10	**8500**	**1 Pair**
		11	**DEA0010206**	1336010-11	**8500**	**1 Pair**
		12	**DEA0010207**	1336010-12	**8500**	**1 Pair**
	410mm	7	**DEA0010532**	1341010-07	**8500**	**1 Pair**
		8	**DEA0010246**	1341010-08	**8500**	**1 Pair**
		9	**DEA0010248**	1341010-09	**8500**	**1 Pair**
		10	**DEA0010250**	1341010-10	**8500**	**1 Pair**
		11	**DEA0010252**	1341010-11	**8500**	**1 Pair**
		12	**DEA0010254**	1341010-12	**8500**	**1 Pair**

ELECTRICAL SAFETY PRODUCTS

KC-Composite Series Electrical Insulating Gloves with ARC Flash & Mechanical Protection - Class 1 - **Model - KC-C**



ARC Tested - ASTM F2675 IEC - 61482-1-2 CE 2777

- Conforms to EN 60903:2003, IEC 60903:2014, ASTM F 2675 and IEC 61482-1-2 standards
- ASTM F2675 - ATPV / ARLim Rating: **45 cal/cm²**, IEC61482 **Box Tested - APC- 2**
- The ergonomic design offers extended comfort for the wearer, while its thickness guarantees dexterity
- Made from natural rubber latex for maximum durability and flexibility, it offers an ultimate fit, comfort, and performance for the safety and protection of electrical workers
- Classification Type: Class 1, Maximum working voltage: 7500 VAC and 11250 VDC
- Withstand Voltage: 20 kVAC; Proof Test Voltage: 10 kVAC
- **Bi-Color - Red Inside & Black Outside**, Category: RC, Sizes: 7, 8, 9, 10, 11 & 12
- REACH compliant, Powder-free, Arc Flash Tested

Classification	Length	Size	Straight Cuff			
			PCN	Product Code	List Price (INR) Per Pair	MOQ
Class 1	360mm	7	**DEA0010533**	1336011-07	**10500**	**1 Pair**
		8	**DEA0010255**	1336011-08	**10500**	**1 Pair**
		9	**DEA0010257**	1336011-09	**10500**	**1 Pair**
		10	**DEA0010259**	1336011-10	**10500**	**1 Pair**
		11	**DEA0010261**	1336011-11	**10500**	**1 Pair**
		12	**DEA0010263**	1336011-12	**10500**	**1 Pair**
	410mm	7	**DEA0010534**	1341011-07	**10500**	**1 Pair**
		8	**DEA0010256**	1341011-08	**10500**	**1 Pair**
		9	**DEA0010258**	1341011-09	**10500**	**1 Pair**
		10	**DEA0010260**	1341011-10	**10500**	**1 Pair**
		11	**DEA0010262**	1341011-11	**10500**	**1 Pair**
		12	**DEA0010264**	1341011-12	**10500**	**1 Pair**

ELECTRICAL SAFETY PRODUCTS

KC-Composite Series Electrical Insulating Gloves with ARC Flash & Mechanical Protection - Class 2 - **Model - KC-D**



- Conforms to EN 60903:2003, IEC 60903:2014, ASTM F 2675 and IEC 61482-1-2 standards
- ASTM F2675 - ATPV / ARLim Rating: **55 cal/cm²**, IEC61482 **Box Tested - APC- 2**
- The ergonomic design offers extended comfort for the wearer, while its thickness guarantees dexterity
- Made from natural rubber latex for maximum durability and flexibility, it offers an ultimate fit, comfort, and performance for the safety and protection of electrical workers
- Classification Type: Class 2, Maximum working voltage: 17000 VAC and 25500 VDC
- Withstand Voltage: 30 kVAC; Proof Test Voltage: 20 kVAC
- **Bi-Color - Red Inside & Black Outside**, Category: RC, Sizes: 7, 8, 9, 10, 11 & 12
- REACH compliant, Powder-free, Arc Flash Tested

Classification	Length	Size	Straight Cuff			
			PCN	Product Code	List Price (INR) Per Pair	MOQ
Class 2	360mm	7	**DEA0010535**	1336012-07	**14000**	**1 Pair**
		8	**DEA0010208**	1336012-08	**14000**	**1 Pair**
		9	**DEA0010210**	1336012-09	**14000**	**1 Pair**
		10	**DEA0010212**	1336012-10	**14000**	**1 Pair**
		11	**DEA0010214**	1336012-11	**14000**	**1 Pair**
		12	**DEA0010216**	1336012-12	**14000**	**1 Pair**
	410mm	7	**DEA0010536**	1341012-07	**14000**	**1 Pair**
		8	**DEA0010209**	1341012-08	**14000**	**1 Pair**
		9	**DEA0010211**	1341012-09	**14000**	**1 Pair**
		10	**DEA0010213**	1341012-10	**14000**	**1 Pair**
		11	**DEA0010215**	1341012-11	**14000**	**1 Pair**
		12	**DEA0010217**	1341012-12	**14000**	**1 Pair**

ELECTRICAL SAFETY PRODUCTS

KC-Composite Series Electrical Insulating Gloves with ARC Flash & Mechanical Protection - Class 3 - **Model - KC-E**





- Conforms to EN 60903:2003, IEC 60903:2014, ASTM F 2675 and IEC 61482-1-2 standards
- ASTM F2675 - ATPV / ARLim Rating: **35 cal/cm²**, IEC61482 **Box Tested - APC- 2**
- The ergonomic design offers extended comfort for the wearer, while its thickness guarantees dexterity
- Made from natural rubber latex for maximum durability and flexibility, it offers an ultimate fit, comfort, and performance for the safety and protection of electrical workers
- Classification Type: Class 3, Maximum working voltage: 26500 VAC and 39750 VDC
- Withstand Voltage: 40 kVAC; Proof Test Voltage: 30 kVAC
- **Bi-Color - Red Inside & Black Outside**, Category: RC, Sizes: 8, 9, 10, 11 & 12
- REACH compliant, Powder-free, Arc Flash Tested

Classification	Length	Size	Straight Cuff			
			PCN	Product Code	List Price (INR) Per Pair	MOQ
Class 3	360mm	8	**DEA0010269**	1336013-08	**16750**	**1 Pair**
		9	**DEA0010271**	1336013-09	**16750**	**1 Pair**
		10	**DEA0010273**	1336013-10	**16750**	**1 Pair**
		11	**DEA0010275**	1336013-11	**16750**	**1 Pair**
		12	**DEA0010277**	1336013-12	**16750**	**1 Pair**
	410mm	8	**DEA0010270**	1341013-08	**16750**	**1 Pair**
		9	**DEA0010272**	1341013-09	**16750**	**1 Pair**
		10	**DEA0010274**	1341013-10	**16750**	**1 Pair**
		11	**DEA0010276**	1341013-11	**16750**	**1 Pair**
		12	**DEA0010278**	1341013-12	**16750**	**1 Pair**

ELECTRICAL SAFETY PRODUCTS

KC-Composite Series Electrical Insulating Gloves with ARC Flash & Mechanical Protection - Class 4 - **Model - KC-F**





- Conforms to EN 60903:2003, IEC 60903:2014, ASTM F 2675 and IEC 61482-1-2 standards
- ASTM F2675 - ATPV / ARLim Rating: **25 cal/cm²**, IEC61482 **Box Tested - APC- 2**
- The ergonomic design offers extended comfort for the wearer, while its thickness guarantees dexterity
- Made from natural rubber latex for maximum durability and flexibility, it offers an ultimate fit, comfort, and performance for the safety and protection of electrical workers
- Classification Type: Class 4, Maximum working voltage: 36000 VAC and 54500 VDC
- Withstand Voltage: 50 kVAC; Proof Test Voltage: 40 kVAC
- **Bi-Color - Red Inside & Black Outside**, Category: RC, Sizes: 8, 9, 10, 11 & 12
- REACH compliant, Powder-free, Arc Flash Tested

Classification	Length	Size	Straight Cuff			
			PCN	Product Code	List Price (INR) Per Pair	MOQ
Class 4	410mm	8	**DEA0010279**	1341014-08	**23000**	**1 Pair**
		9	**DEA0010280**	1341014-09	**23000**	**1 Pair**
		10	**DEA0010281**	1341014-10	**23000**	**1 Pair**
		11	**DEA0010282**	1341014-11	**23000**	**1 Pair**
		12	**DEA0010283**	1341014-12	**23000**	**1 Pair**

ELECTRICAL SAFETY PRODUCTS

Leather Protector - Over Gloves for **Electrical Insulating Gloves**



- CE Category: II Intermediary risks, Conforms to EN388, EN ISO 21420
- Leather over Glove Water-repellent and silicone treatment Gunn cut, thumb in one piece, gauntlet Velcro adjustment strap on the back 150 mm split leather cuff sewed outside
- The Velcro fastening tab provides the glove with good support
- Silicone grain leather ensures good flexibility, water repellence as well as good
- Protects Electrical gloves against risks of cuts and tearing

Classification	Length	Size	PCN	Product Code	List Price (INR) Per Pair	MOQ
Suitable for Class 00 & 0 - Electrical Gloves	315mm	8	**DEA0010130**	9931000-08	**2710**	**1 Pair**
		9	**DEA0010131**	9931000-09	**2710**	**1 Pair**
		10	**DEA0010132**	9931000-10	**2710**	**1 Pair**
		11	**DEA0010133**	9931000-11	**2710**	**1 Pair**
		12	**DEA0010134**	9931000-12	**2710**	**1 Pair**
Suitable for Class 1 & 2 - Electrical Gloves		8	**DEA0010145**	9931012-08	**2760**	**1 Pair**
		9	**DEA0010146**	9931012-09	**2760**	**1 Pair**
		10	**DEA0010147**	9931012-10	**2760**	**1 Pair**
		11	**DEA0010148**	9931012-11	**2760**	**1 Pair**
		12	**DEA0010149**	9931012-12	**2760**	**1 Pair**
Suitable for Class 3 & 4 - Electrical Gloves		8	**DEA0010165**	9931034-08	**2850**	**1 Pair**
		9	**DEA0010166**	9931034-09	**2850**	**1 Pair**
		10	**DEA0010167**	9931034-10	**2850**	**1 Pair**
		11	**DEA0010168**	9931034-11	**2850**	**1 Pair**
		12	**DEA0010169**	9931034-12	**2850**	**1 Pair**

Kamfet - Inner Gloves for Electrical insulating Gloves



- Made up of knitted gloves/Hosiery
- Provides additional comfort from perspiration
- Available in universal size

Applications:

- Inner glove absorbs perspiration and provides comfort
- For cold regions, it helps in keeping the hands warm

PCN	Product Code	Description	List Price (INR) Per Pair
EBASGG1001	ESU	**Inner Cotton Glove Free Size**	**320**

ELECTRICAL SAFETY PRODUCTS

Accessories for Insulating Mat / Blanket Storage Bag for Outdoor Application



Customised for secure transporting and safeguarding insulating mats/Blankets during outdoor tasks. Enhanced with a comfortable shoulder strap for effortless carrying and added convenience.

Benefits

- Transparent pocket for user instruction and storage identification
- Hand carrying straps and shoulder carrying strap

PCN	Product Code	Use	⟷ m Dimensions	Weight	List Price (INR) Per Nos.
DEA0021642	ESCB1	CARRYING BAG-700X110-FOR 600MM WIDE MAT / BLANKET	1.1 Meter	0.5 Kg	**1750**
DEA0020332	ESCB2	CARRYING BAG-1100X110-FOR 1000MM WIDE MAT / BLANKET	1.1 Meter	0.6 Kg	**2700**

Kamfet - Storage Bag for Electrical Insulating Gloves



Our specialized storage bag for electrical insulating gloves combines safety, durability, and convenience, making it an essential accessory for professionals.

- Heavy-duty, water-resistant nylon or PVC-coated polyester ensures both durability and electrical insulation
- Internal padding and reinforced sections protect gloves from physical damage and wear
- Heavy-duty zippers with an optional lock keep the bag securely closed

PCN	Product Code	Description	List Price (INR) Per Nos.
DEA0010961	ESGB1	**GLOVE BAG-370MM-FOR 360MM LENGTH GLOVE**	**1400**
DEA0010749	ESGB2	**GLOVE BAG-420MM-FOR 410MM LENGTH GLOVE**	**2200**


ELECTRICAL SAFETY PRODUCTS

Insulating Mats - IS 15652:2006

Kamfet Electrical Insulating Matting is engineered to provide optimal safety and protection against electric shocks for operators and maintenance personnel working in low and high-voltage environments. Manufactured to comply with IS 15652:2006 standards, these mats deliver exceptional insulation performance, durability, and reliability.



- **Dual Colour Technology:** The dual-layer design features two colors, enabling easy detection of mechanical damage. Visible color changes on the surface indicate the need for replacement
- **High Dielectric Strength:** Designed to withstand high voltages, providing excellent insulation. Tested as per IS 15652:2006
- **Flame Retardant:** Fire will not propagate in case of a flammable liquid spill or spark. Complies with IS 15652:2006 Clause C-5.1
- **100% Virgin Material:** Ensures extended durability and reliable performance
- **UV Stabilized:** Resistant to degradation caused by sunlight exposure
- **Anti-Skid Surface:** Textured surface enhances grip, reducing slip risks

PCN	Product Code	Class	Thickness in mm	Color	Rolls Size		Image	List Price (INR) Per Roll	MOQ
					Width	Length			
EBASBJ1006	ESIMBLO-A-1X2	CLASS A	2	BLACK ON TOP AND ORANGE ON BOTTOM	1	2		**6400**	50 Roll
EBASBJ1001	ESIMBLO-A-1X10	CLASS A	2		1	10		**31900**	1 Roll
EBASBK1007	ESIMBLO-B-1X2	CLASS B	2.5		1	2		**7800**	50 Roll
EBASBK1002	ESIMBLO-B-1X10	CLASS B	2.5		1	10		**39000**	1 Roll
EBASBL1009	ESIMBLO-C-1X2	CLASS C	3		1	2		**9800**	50 Roll
EBASBL1003	ESIMBLO-C-1X10	CLASS C	3		1	10		**48900**	1 Roll
EBASBJ1007	ESIMBO-A-1X2	CLASS A	2	BLUE ON TOP AND ORANGE ON BOTTOM	1	2		**6400**	50 Roll
EBASBJ1004	ESIMBO-A-1X10	CLASS A	2		1	10		**31900**	1 Roll
EBASBK1006	ESIMBO-B-1X2	CLASS B	2.5		1	2		**7800**	50 Roll
EBASBK1005	ESIMBO-B-1X10	CLASS B	2.5		1	10		**39000**	1 Roll
EBASBL1010	ESIMBO-C-1X2	CLASS C	3		1	2		**9800**	50 Roll
EBASBL1007	ESIMBO-C-1X10	CLASS C	3		1	10		**48900**	1 Roll
EBASBL1008	ESIMGO-C-1X2	CLASS C	3	GREY ON TOP AND ORANGE ON BOTTOM	1	2		**9800**	50 Roll
EBASBL1005	ESIMGO-C-1X10	CLASS C	3		1	10		**48900**	1 Roll

ELECTRICAL SAFETY PRODUCTS

Electrical Insulating Matting Fabric Mat Finish - IEC61111 - Dark Grey Color

Electrical Insulating Rubber Matting, also known as electrical safety mats or switchboard matting, is a rubber mat designed to provide electrical insulation and protect workers from electric shocks in areas where electrical equipment is operated. These mats are commonly used in industrial, commercial, and utility environments with a risk of electrical hazards.

Kamfet - Electrical Insulating Rubber Matting: Unmatched Safety, Unrivalled Quality

Introducing **Kamfet** Range of Electrical Insulating Rubber Matting, your ultimate solution for ensuring unparalleled safety in electrical environments. Also known as dielectric or electrical safety matting, our mats are meticulously designed to protect individuals against electrical shock from equipment in switch rooms, in front of switchboards, transformers, and in various high or low-voltage workplaces.



- Fully tested to specification IEC 61111:2009
- High electrical resistance from 50 volts to 50,000 volts
- Suitable for both AC and DC applications
- Provides enhanced safety for operators against electrical shock
- Features an anti-slip surface finish, conforming to slip-resistant test
- Resistant to acid, oil, and low temperatures, ensuring durability
- Permanent marking-durable and un-erasable for clear Identification
- Supplied with full traceability for quality assurance
- Requires minimal maintenance, ensuring long-lasting usability
- Constructed with highly durable and quality rubber compound
- Designed with highly flexible mats featuring a self-gripping design
- Anti-fatigue type, providing comfort during prolonged standing
- Operating temperature range: -40°C to +55°C, suitable for various environments
- Repetitive marking, with three markings every 1 meter
- Halogen-free, RoHS2, and REACH compliant, meeting environmental standards
- Color - **Dark Grey - Mat Fabric Finish**

Class 0 Maximum Working Voltage 1000 VAC and 1500 VDC

PCN	Product Code	Thickness (mm)	Width	Length	Weight (kg)	List Price (INR) Per Roll	MOQ
DEA0021451	ESOFIG-0.6X1-G	2.2 mm	0.6 Meter	1 Meter	2.02 kg	**2300**	25 Roll
DEA0021453	ESOFIG-0.6X2-G			2 Meter	4.04 kg	**4500**	25 Roll
DEA0021455	ESOFIG-0.6X5-G			5 Meter	10.1 kg	**11300**	25 Roll
DEA0021458	ESOFIG-0.6X10-G			10 Meter	20.2 kg	**22600**	25 Roll
DEA0021459	ESOFIG-1X1-G		1.0 Meter	1 Meter	3.37 kg	**3800**	1 Roll
DEA0021460	ESOFIG-1X2-G			2 Meter	6.73 kg	**7500**	1 Roll
DEA0021463	ESOFIG-1X5-G			5 Meter	16.83 kg	**18800**	1 Roll
DEA0021464	ESOFIG-1X10-G			10 Meter	33.66 kg	**37600**	1 Roll
DEA0021466	ESOFIG-1.2X1-G		1.2 Meter	1 Meter	4.04 kg	**4600**	25 Roll
DEA0021467	ESOFIG-1.2X2-G			2 Meter	8.08 kg	**9100**	25 Roll
DEA0021468	ESOFIG-1.2X5-G			5 Meter	20.2 kg	**22700**	25 Roll
DEA0021469	ESOFIG-1.2X10-G			10 Meter	40.39 kg	**45500**	25 Roll

ELECTRICAL SAFETY PRODUCTS

Class 1 Maximum Working Voltage **7500 VAC** and **11250 VDC**

PCN	Product Code	Thickness (mm)	Width	Length	Weight (kg)	List Price (INR) Per Roll	MOQ
DEA0021470	ES1FIG-0.6X1-G	2.2 mm	0.6 Meter	1 Meter	2.02 kg	**2300**	25 Roll
DEA0021472	ES1FIG-0.6X2-G			2 Meter	4.04 kg	**4500**	25 Roll
DEA0021474	ES1FIG-0.6X5-G			5 Meter	10.1 kg	**11300**	25 Roll
DEA0021476	ES1FIG-0.6X10-G			10 Meter	20.2 kg	**22600**	25 Roll
DEA0021477	ES1FIG-1X1-G		1.0 Meter	1 Meter	3.37 kg	**3800**	1 Roll
DEA0021478	ES1FIG-1X2-G			2 Meter	6.73 kg	**7500**	1 Roll
DEA0021479	ES1FIG-1X5-G			5 Meter	16.83 kg	**18800**	1 Roll
DEA0021481	ES1FIG-1X10-G			10 Meter	33.66 kg	**37600**	1 Roll
DEA0021482	ES1FIG-1.2X1-G		1.2 Meter	1 Meter	4.04 kg	**4600**	25 Roll
DEA0021483	ES1FIG-1.2X2-G			2 Meter	8.08 kg	**9100**	25 Roll
DEA0021484	ES1FIG-1.2X5-G			5 Meter	20.2 kg	**22700**	25 Roll
DEA0021485	ES1FIG-1.2X10-G			10 Meter	40.39 kg	**45500**	25 Roll

Class 2 Maximum Working Voltage 17000 VAC and 25500 VDC

PCN	Product Code	Thickness (mm)	Width	Length	Weight (kg)	List Price (INR) Per Roll	MOQ
DEA0021486	ES2FIG-0.6X1-G	2.6 mm	0.6 Meter	1 Meter	2.39 kg	**2700**	25 Roll
DEA0021487	ES2FIG-0.6X2-G			2 Meter	4.77 kg	**5400**	25 Roll
DEA0021488	ES2FIG-0.6X5-G			5 Meter	11.93 kg	**13400**	25 Roll
DEA0021489	ES2FIG-0.6X10-G			10 Meter	23.87 kg	**26900**	25 Roll
DEA0021490	ES2FIG-1X1-G		1.0 Meter	1 Meter	3.98 kg	**4500**	1 Roll
DEA0021491	ES2FIG-1X2-G			2 Meter	7.96 kg	**9000**	1 Roll
DEA0021492	ES2FIG-1X5-G			5 Meter	19.89 kg	**22400**	1 Roll
DEA0021493	ES2FIG-1X10-G			10 Meter	39.78 kg	**44800**	1 Roll
DEA0021494	ES2FIG-1.2X1-G		1.2 Meter	1 Meter	4.77 kg	**5400**	25 Roll
DEA0021495	ES2FIG-1.2X2-G			2 Meter	9.55 kg	**10700**	25 Roll
DEA0021496	ES2FIG-1.2X5-G			5 Meter	23.87 kg	**26900**	25 Roll
DEA0021497	ES2FIG-1.2X10-G			10 Meter	47.74 kg	**53700**	25 Roll

Class 3 Maximum Working Voltage 26500 VAC and 39750 VDC

PCN	Product Code	Thickness (mm)	Width	Length	Weight (kg)	List Price (INR) Per Roll	MOQ
DEA0021498	ES3FIG-0.6X1-G	3.2 mm	0.6 Meter	1 Meter	2.94 kg	**3300**	25 Roll
DEA0021499	ES3FIG-0.6X2-G			2 Meter	5.88 kg	**6600**	25 Roll
DEA0021500	ES3FIG-0.6X5-G			5 Meter	14.69 kg	**16500**	25 Roll
DEA0021501	ES3FIG-0.6X10-G			10 Meter	29.38 kg	**32900**	25 Roll
DEA0021502	ES3FIG-1X1-G		1.0 Meter	1 Meter	4.9 kg	**5500**	1 Roll
DEA0021503	ES3FIG-1X2-G			2 Meter	9.79 kg	**11000**	1 Roll
DEA0021505	ES3FIG-1X5-G			5 Meter	24.48 kg	**27400**	1 Roll
DEA0021507	ES3FIG-1X10-G			10 Meter	48.96 kg	**54800**	1 Roll
DEA0021509	ES3FIG-1.2X1-G		1.2 Meter	1 Meter	5.88 kg	**6600**	25 Roll
DEA0021512	ES3FIG-1.2X2-G			2 Meter	11.75 kg	**13200**	25 Roll
DEA0021514	ES3FIG-1.2X5-G			5 Meter	29.38 kg	**32900**	25 Roll
DEA0021515	ES3FIG-1.2X10-G			10 Meter	58.75 kg	**65900**	25 Roll

Class 4 Maximum Working Voltage 36000 VAC and 54000 VDC

PCN	Product Code	Thickness (mm)	Width	Length	Weight (kg)	List Price (INR) Per Roll	MOQ
DEA0021516	ES4FIG-0.6X1-G	5.2 mm	0.6 Meter	1 Meter	4.77 kg	**5400**	25 Roll
DEA0021517	ES4FIG-0.6X2-G			2 Meter	9.55 kg	**10700**	25 Roll
DEA0021519	ES4FIG-0.6X5-G			5 Meter	23.87 kg	**26900**	25 Roll
DEA0021520	ES4FIG-0.6X10-G			10 Meter	47.74 kg	**53700**	25 Roll
DEA0021521	ES4FIG-1X1-G		1.0 Meter	1 Meter	7.96 kg	**8900**	1 Roll
DEA0021524	ES4FIG-1X2-G			2 Meter	15.91 kg	**17800**	1 Roll
DEA0021526	ES4FIG-1X5-G			5 Meter	39.78 kg	**44600**	1 Roll
DEA0021527	ES4FIG-1X10-G			10 Meter	79.56 kg	**89200**	1 Roll
DEA0021528	ES4FIG-1.2X1-G		1.2 Meter	1 Meter	9.55 kg	**10700**	25 Roll
DEA0021529	ES4FIG-1.2X2-G			2 Meter	19.09 kg	**21400**	25 Roll
DEA0021530	ES4FIG-1.2X5-G			5 Meter	47.74 kg	**53600**	25 Roll
DEA0021531	ES4FIG-1.2X10-G			10 Meter	95.47 kg	**107100**	25 Roll

ELECTRICAL SAFETY PRODUCTS

Electrical Insulating Matting Fabric Finish - IEC61111 - Dual Color - Black / Orange


The insulating mats offer both individual and collective protection to operators. Crafted from high-quality elastomeric materials, these mats are specifically designed to cover the ground, ensuring the electrical safety of workers during repairs to electrical installations. By providing a reliable insulating barrier, these mats play a vital role in safeguarding operators from the risk of electric shocks, making them an indispensable safety measure in various industrial and commercial settings.

Kamfet Matting - Empowered by Dual-Color Technology

Incorporating **Dual-Color technology**, our insulating mats are meticulously engineered to elevate safety standards. This innovative design enables effortless **damage detection** to the top layer, facilitating prompt assessment and mat replacement decisions.

Kamfet insulation matting consistently showcases exceptional dielectric strength, rigorously tested in accordance with the stringent IEC 61111:2009 standards. Our unwavering commitment to quality ensures that our mats deliver reliable electrical insulation, meeting the highest industry benchmarks for safety and performance.

The **two colors** of the mat serve the purpose of mechanical damage indication and provide a visual cue to replace the mat when the color change becomes visible on the surface. This innovative feature helps users quickly identify wear and tear, ensuring timely replacement for optimal performance and safety.

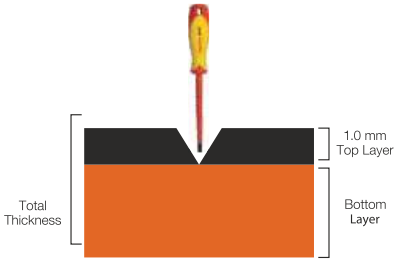

IEC 61111 : 2009
Bi-Colour Matting



- Fully tested to specification IEC 61111:2009
- **Dual-Color (Life Indicator) Technology**: Black on top and Orange on bottom
- High electrical resistance from 50 volts to 50,000 volts
- Suitable for both AC and DC applications
- Provides enhanced safety for operators against electrical shock
- Features an anti-slip surface finish, conforming to slip-resistant test
- Resistant to acid, oil, and low temperatures, ensuring durability
- Permanent marking-durable and un-erasable for clear identification
- Supplied with full traceability for quality assurance
- Requires minimal maintenance, ensuring long-lasting usability
- Constructed with highly durable and quality rubber compound
- Designed with highly flexible mats featuring a self-gripping design
- Anti-fatigue type, providing comfort during prolonged standing
- Operating temperature range: -40°C to +55°C, suitable for various environments
- Repetitive marking, with three markings every 1 meter
- Halogen-free, RoHS2, and REACH compliant, meeting environmental standards

Class 0 Maximum Working Voltage 1000 VAC and 1500 VDC

PCN	Product Code	Thickness (mm)	Width	Length	Weight (kg)	List Price (INR) Per Roll	MOQ
DEA0021339	ES0FIBO-1X1-M	2.2 mm	1.0 Meter	1 Meter	3.3 kg	**4920**	1 Roll
DEA0021340	ES0FIBO-1X2-M			2 Meter	6.6 kg	**9820**	1 Roll
DEA0021341	ES0FIBO-1X5-M			5 Meter	16.5 kg	**24550**	1 Roll
DEA0021342	ES0FIBO-1X10-M			10 Meter	33 kg	**49100**	1 Roll
DEA0021343	ES0FIBO-1.2X1-M		1.2 Meter	1 Meter	3.96 kg	**5890**	25 Roll
DEA0021344	ES0FIBO-1.2X2-M			2 Meter	7.92 kg	**11800**	25 Roll
DEA0021345	ES0FIBO-1.2X5-M			5 Meter	19.8 kg	**29450**	25 Roll
DEA0021346	ES0FIBO-1.2X10-M			10 Meter	39.6 kg	**58900**	25 Roll

ELECTRICAL SAFETY PRODUCTS

Class 1 Maximum Working Voltage 7500 VAC and 11250 VDC

PCN	Product Code	Thickness (mm)	Width	Length	Weight (kg)	List Price (INR) Per Roll	MOQ
DEA0021347	ES1FIBO-1X1-M	2.2 mm	1.0 Meter	1 Meter	3.3 kg	**4920**	1 Roll
DEA0021348	ES1FIBO-1X2-M			2 Meter	6.6 kg	**9830**	1 Roll
DEA0021349	ES1FIBO-1X5-M			5 Meter	16.5 kg	**24550**	1 Roll
DEA0021350	ES1FIBO-1X10-M			10 Meter	33 kg	**49100**	1 Roll
DEA0021351	ES1FIBO-1.2X1-M		1.2 Meter	1 Meter	3.96 kg	**5890**	25 Roll
DEA0021352	ES1FIBO-1.2X2-M			2 Meter	7.92 kg	**11800**	25 Roll
DEA0021353	ES1FIBO-1.2X5-M			5 Meter	19.8 kg	**29450**	25 Roll
DEA0021354	ES1FIBO-1.2X10-M			10 Meter	39.6 kg	**58900**	25 Roll

Class 2 Maximum Working Voltage 17000 VAC and 25500 VDC

PCN	Product Code	Thickness (mm)	Width	Length	Weight (kg)	List Price (INR) Per Roll	MOQ
DEA0021355	ES2FIBO-1X1-M	2.6 mm	1.0 Meter	1 Meter	3.9 kg	**6150**	1 Roll
DEA0021356	ES2FIBO-1X2-M			2 Meter	7.8 kg	**12300**	1 Roll
DEA0021357	ES2FIBO-1X5-M			5 Meter	19.5 kg	**30750**	1 Roll
DEA0021358	ES2FIBO-1X10-M			10 Meter	39 kg	**61450**	1 Roll
DEA0021359	ES2FIBO-1.2X1-M		1.2 Meter	1 Meter	4.68 kg	**7380**	25 Roll
DEA0021360	ES2FIBO-1.2X2-M			2 Meter	9.36 kg	**14750**	25 Roll
DEA0021361	ES2FIBO-1.2X5-M			5 Meter	23.4 kg	**36900**	25 Roll
DEA0021362	ES2FIBO-1.2X10-M			10 Meter	46.8 kg	**73750**	25 Roll

Class 3 Maximum Working Voltage 26500 VAC and 39750 VDC

PCN	Product Code	Thickness (mm)	Width	Length	Weight (kg)	List Price (INR) Per Roll	MOQ
DEA0021363	ES3FIBO-1X1-M	3.2 mm	1.0 Meter	1 Meter	4.8 kg	**7010**	1 Roll
DEA0021364	ES3FIBO-1X2-M			2 Meter	9.6 kg	**14050**	1 Roll
DEA0021365	ES3FIBO-1X5-M			5 Meter	24 kg	**35100**	1 Roll
DEA0021366	ES3FIBO-1X10-M			10 Meter	48 kg	**70150**	1 Roll
DEA0021367	ES3FIBO-1.2X1-M		1.2 Meter	1 Meter	5.76 kg	**8420**	25 Roll
DEA0021368	ES3FIBO-1.2X2-M			2 Meter	11.52 kg	**16850**	25 Roll
DEA0021369	ES3FIBO-1.2X5-M			5 Meter	28.8 kg	**42100**	25 Roll
DEA0021370	ES3FIBO-1.2X10-M			10 Meter	57.6 kg	**84200**	25 Roll

Class 4 Maximum Working Voltage 36000 VAC and 54000 VDC

PCN	Product Code	Thickness (mm)	Width	Length	Weight (kg)	List Price (INR) Per Roll	MOQ
DEA0021371	ES4FIBO-1X1-M	5.2 mm	1.0 Meter	1 Meter	7.8 kg	**11950**	1 Roll
DEA0021372	ES4FIBO-1X2-M			2 Meter	15.6 kg	**23900**	1 Roll
DEA0021373	ES4FIBO-1X5-M			5 Meter	39 kg	**59700**	1 Roll
DEA0021374	ES4FIBO-1X10-M			10 Meter	78 kg	**119350**	1 Roll
DEA0021375	ES4FIBO-1.2X1-M		1.2 Meter	1 Meter	9.36 kg	**14350**	25 Roll
DEA0021376	ES4FIBO-1.2X2-M			2 Meter	18.72 kg	**28650**	25 Roll
DEA0021377	ES4FIBO-1.2X5-M			5 Meter	46.8 kg	**71600**	25 Roll
DEA0021378	ES4FIBO-1.2X10-M			10 Meter	93.6 kg	**143200**	25 Roll

ELECTRICAL SAFETY PRODUCTS

ARC Flash Protection Products - 8 cal/cm²



- **Inherent Flame-Retardant material**
- Fabric Composition: 49% Modacrylic, 45% Cellulose, 5% Para-Aramid, 1% Anti -Static
- The fibre's inherent arc thermal performance value is decided by its molecular structure. The fibre will not be burned inherently. Its flame resistance comes from the fibre itself instead of the chemicals on the surface. Thus, the permanent flame-resistant performance will not be washed out or worn away.
- Durable. with a long life, its inherent permanent protection will not degrade by washing or wearing.
- More breathable & comfortable
- Tested: ASTM F2621/F2621M-22
- ATPV Rating: 8 cal/cm²
- Meets the NFPA70E- HRC 2
- Lightweight: 240 g/m²
- Daily workwear designed for intensive use is essential for electricians to protect against ARC Flash hazards encountered during the Installation, Operation, and maintenance of electrical equipment

Arc Flash Clothing-IFR-8 cal/cm² -Jacket -Bi-Colour Orange And Blue With Reflective

PCN	Product Code	Color	Size	List Price (INR) Per Nos.
DEA0031010	ESAFC8J-OB-R-S	Orange & Blue With Reflective	S	10650
DEA0031011	ESAFC8J-OB-R-M		M	10650
DEA0031012	ESAFC8J-OB-R-L		L	10650
DEA0031013	ESAFC8J-OB-R-XL		XL	10650
DEA0031014	ESAFC8J-OB-R-XXL		XXL	10650
DEA0031033	ESAFC8J-OB-R-3XL		3XL	10650

Arc Flash Clothing-IFR-8 cal/cm² -Jacket -Blue With Reflective

PCN	Product Code	Color	Size	List Price (INR) Per Nos.
DEA0031028	ESAFC8J-B-R-S	Blue With Reflective	S	10350
DEA0031029	ESAFC8J-B-R-M		M	10350
DEA0031030	ESAFC8J-B-R-L		L	10350
DEA0031031	ESAFC8J-B-R-XL		XL	10350
DEA0031032	ESAFC8J-B-R-XXL		XXL	10350
DEA0031048	ESAFC8J-B-R-3XL		3XL	10350

Arc Flash Clothing-IFR-8 cal/cm² -Shirt-Blue

PCN	Product Code	Color	Size	List Price (INR) Per Nos.
DEA0031061	ESAFC8S-B-S	Blue	S	8650
DEA0031062	ESAFC8S-B-M		M	8650
DEA0031063	ESAFC8S-B-L		L	8650
DEA0031064	ESAFC8S-B-XL		XL	8650
DEA0031065	ESAFC8S-B-XXL		XXL	8650
DEA0031066	ESAFC8S-B-3XL		3XL	8650

ELECTRICAL SAFETY PRODUCTS

Arc Flash Clothing-IFR-8 cal/cm² -Pant -Blue With Reflective

PCN	Product Code	Color	Size	List Price (INR) Per Nos.
DEA0031015	ESAFC8P-B-R-S	Blue With Reflective	S	6540
DEA0031016	ESAFC8P-B-R-M		M	6540
DEA0031017	ESAFC8P-B-R-L		L	6540
DEA0031018	ESAFC8P-B-R-XL		XL	6540
DEA0031019	ESAFC8P-B-R-XXL		XXL	6540
DEA0031034	ESAFC8P-B-R-3XL		3XL	6540

Arc Flash Clothing-IFR-8 cal/cm² -Pant -Blue

PCN	Product Code	Color	Size	List Price (INR) Per Nos.
DEA0031067	ESAFC8P-B-S	Blue	S	6080
DEA0031068	ESAFC8P-B-M		M	6080
DEA0031069	ESAFC8P-B-L		L	6080
DEA0031070	ESAFC8P-B-XL		XL	6080
DEA0031071	ESAFC8P-B-XXL		XXL	6080
DEA0031072	ESAFC8P-B-3XL		3XL	6080



Arc Flash Kit -IFR-8 cal/cm² - HRC 2-Jacket, Pant, Hood With Helmet, Safety Glass, And Storage Bag - Colour - Blue

PCN	Product Code	Color	Size	List Price (INR) Per Nos.
DEA0031093	ESKJP8-S	Blue	S	50000
DEA0031094	ESKJP8-M		M	50000
DEA0031095	ESKJP8-L		L	50000
DEA0031096	ESKJP8-XL		XL	50000
DEA0031097	ESKJP8-XXL		XXL	50000
DEA0031098	ESKJP8-3XL		3XL	50000



Arc Flash Kit -IFR-8 cal/cm² - HRC 2-Shirt, Pant, Hood With Helmet, Safety Glass, And Storage Bag - Colour - Blue

PCN	Product Code	Color	Size	List Price (INR) Per Nos.
DEA0031114	ESKSP8-S	Blue	S	47600
DEA0031115	ESKSP8-M		M	47600
DEA0031116	ESKSP8-L		L	47600
DEA0031117	ESKSP8-XL		XL	47600
DEA0031118	ESKSP8-XXL		XXL	47600
DEA0031119	ESKSP8-3XL		3XL	47600



Arc Flash Protection Face Shield - 16 cal/cm²

PCN	Product Code	Description	List Price (INR) Per Nos.
EBASAE1002	ESFS16C	ESFS16C ARC FLASH FACE SHIELD-16 cal/cm² -WITH CLIP	20000
EBASAE1003	ESFS16C-HAT	ESFS16C-HAT ARC FLASH FACE SHIELD-16 cal/cm² -WITH CLIP + CLASS E HELMET	23500
DEA0031112	ESFK12	ARC FLASH FACE SHIELD-12 cal/cm² -WITH CLIP + CLASS E HELMET + BALACLAVA	30500
DEA0031111	ESAFH10	BALACLAVA 12 cal/cm²	6000

ELECTRICAL SAFETY PRODUCTS

ARC Flash Protection Products - IFR - 12 cal/cm²



- **Inherent Flame-Retardant material**
- Fabric Composition: 49% Modacrylic, 45% Cellulose, 5% Para-Aramid,1% Anti -Static
- The fibre's inherent arc thermal performance value is decided by its molecular structure. The fibre will not be burned inherently
- Its flame resistance comes from the fibre itself instead of the chemicals on the surface. Thus, the permanent flame-resistant performance will not be washed out or worn away.
- Durable with a long life, its inherent permanent protection will not degrade by washing or wearing
- More breathable & comfortable
- Tested: ASTM F2621/F2621M-22
- ATPV Rating: 12 cal/cm²
- Meets the NFPA70E- HRC 2
- Lightweight: 268 g/m²
- Daily workwear designed for intensive use is essential for electricians to protect against ARC Flash hazards encountered during the Installation, Operation, and maintenance of electrical equipment

Arc Flash Clothing-IFR-12 cal/cm² -Jacket -Bi-Colour - Orange And Blue With Reflective

PCN	Product Code	Color	Size	List Price (INR) Per Nos.
DEA0031038	ESAFC12J-OB-R-S	Orange & Blue With Reflective	S	10800
DEA0031039	ESAFC12J-OB-R-M		M	10800
DEA0031040	ESAFC12J-OB-R-L		L	10800
DEA0031041	ESAFC12J-OB-R-XL		XL	10800
DEA0031042	ESAFC12J-OB-R-XXL		XXL	10800
DEA0031121	ESAFC12J-OB-R-3XL		3XL	10800

Arc Flash Clothing-IFR-12 cal/cm² -Jacket -Blue With Reflective

PCN	Product Code	Color	Size	List Price (INR) Per Nos.
DEA0031132	ESAFC12J-B-R-S	Blue With Reflective	S	10650
DEA0031133	ESAFC12J-B-R-M		M	10650
DEA0031134	ESAFC12J-B-R-L		L	10650
DEA0031135	ESAFC12J-B-R-XL		XL	10650
DEA0031136	ESAFC12J-B-R-XXL		XXL	10650
DEA0031137	ESAFC12J-B-R-3XL		3XL	10650

Arc Flash Clothing-IFR-12 cal/cm² -Pant -Blue With Reflective

PCN	Product Code	Color	Size	List Price (INR) Per Nos.
DEA0031043	ESAFC12P-B-R-S	Blue With Reflective	S	7200
DEA0031044	ESAFC12P-B-R-M		M	7200
DEA0031045	ESAFC12P-B-R-L		L	7200
DEA0031046	ESAFC12P-B-R-XL		XL	7200
DEA0031047	ESAFC12P-B-R-XXL		XXL	7200
DEA0031122	ESAFC12P-B-R-3XL		3XL	7200

ELECTRICAL SAFETY PRODUCTS



Arc Flash Kit -IFR-12 cal/cm² - HRC 2-Shirt, Pant, Hood With Helmet, Safety Glass, And Storage Bag -Colour - Blue

PCN	Product Code	Color	Size	List Price (INR) Per Nos.
EBASAD1002	ESKJP12-S	**Blue**	**S**	**51200**
EBASAD1003	ESKJP12-M		**M**	**51200**
EBASAD1004	ESKJP12-L		**L**	**51200**
EBASAD1005	ESKJP12-XL		**XL**	**51200**
EBASAD1006	ESKJP12-XXL		**XXL**	**51200**
EBASAD1007	ESKJP12-3XL		**3XL**	**51200**



Arc Flash Kit -IFR-12 cal/cm² - HRC 2-Shirt, Pant, Hood With Helmet, Safety Glass, And Storage Bag -Colour - Blue

PCN	Product Code	Description	List Price (INR) Per Pair
DEA0031123	ESAFG12	**Arc Flash Glove**	**4510**

ELECTRICAL SAFETY PRODUCTS

ARC Flash Protection Products - 25 cal/cm²

The Kamfet ESK-25 Arc Flash Protection Kit is engineered to deliver maximum protection, comfort, and mobility for electrical professionals working in high-energy environments. It is rated at 25 cal/cm², meets Category 3 PPE requirements, and exceeds international safety standards.



Superior Protection:
- Arc Thermal Performance Value (ATPV): 25 cal/cm² – Category 3 PPE
- 100% Inherent FR Fabric: Engineered blend of Modacrylic, Meta-Aramid, Para-Aramid, Anti-static fibres, and Lenzing FR

Ergonomic Design & Comfort :
- Lightweight and breathable construction
- Optimised for a tailored fit, mobility, and all-day comfort
- Adjustable suspenders, elastic waist, and contoured cuts
- Covered zippers and storm flaps for added protection
- Flame-resistant Velcro® and high-durability closures
- Modernised sporty design for a professional appearance

High-Visibility Arc Flash Face Hood :
- Next-gen clear lens technology for enhanced colour perception and reduced eye fatigue
- 25 cal/cm² - rated anti-fog, anti-scratch face shield
- Ergonomic hood with integrated hard hat compatibility

Certifications and compliance:
- NFPA 70E – Electrical Safety in the Workplace
- ASTM F1506 – Flame Resistant and Arc-Rated Protective Clothing
- ASTM F2178 – Arc Rating for Face and Eye Protection
- ASTM F2621 – Evaluation of Finished Product Arc Response
- IEC 61482-2 – Protective Clothing Against the Thermal Hazards of an Electric ARC

25 cal/cm² ARC Flash Protection Kit

PCN	Product Code	Size	Product Description	Image	List Price (INR) Per Nos.
DEA0031085	ESK25-S	S	25 cal/cm² ARC Flash Protection Kit Contains • Jacket • BIB Overalls • ARC Flash Hood • Class E Helmet • Safety Eyewear • Storage Bag		85100
DEA0031086	ESK25-M	M			85100
DEA0031087	ESK25-L	L			85100
DEA0031088	ESK25-XL	XL			85100
DEA0031089	ESK25-XXL	XXL			85100
DEA0031090	ESK25-3XL	3XL			85100

25 cal/cm² ARC Flash Protection - Jacket

PCN	Product Code	Size	Product Description	Image	List Price (INR) Per Nos.
DEA0031073	ESAFC25J-B-S	S	• Next Gen Collar Design:Enhances fit and adds a touch of modern style • Durable Zip with Snap Button Closure: Ensures secure fastening and long-lasting wear • Knitted Cuffs:Provide a snug fit around the wrists to keep out dust and wind. • Fold-Over Hem:Creates a neat and professional bottom finish. • Concealed Inner Seams:Deliver a smooth and tidy interior, reducing irritation. • Set-In Sleeves:Allow natural arm movement for all-day comfort. • Dark Fabric Color:Effectively conceals stains, maintaining a cleaner appearance. • Available Sizes :S to 3XL for a broad and inclusive fit range.		24950
DEA0031074	ESAFC25J-B-M	M			24950
DEA0031075	ESAFC25J-B-L	L			24950
DEA0031076	ESAFC25J-B-XL	XL			24950
DEA0031077	ESAFC25J-B-XXL	XXL			24950
DEA0031078	ESAFC25J-B-3XL	3XL			24950

ELECTRICAL SAFETY PRODUCTS

25 cal/cm² ARC Flash Protection - Pant

PCN	Product Code	Size	Product Description	Image	List Price (INR) Per Nos.
DEA0031079	ESAFC25P-B-S	**S**	• Neat Finish: Concealed seams for a clean, professional look inside and out • Easy Donning: Closed suspenders without buckles allow single-person use • Waist Adjustment: Waist gore with tab ensures a flexible and secure fit • Bottom Extension: Gore with two tabs allows donning over shoes • Smooth Interior: Inside finish with hidden seams for comfort and appearance • Dark Color: Minimizes visible stains, stays presentable longer • Size Range: Available from S to 3XL for optimal fit		**20400**
DEA0031080	ESAFC25P-B-M	**M**			**20400**
DEA0031081	ESAFC25P-B-L	**L**			**20400**
DEA0031082	ESAFC25P-B-XL	**XL**			**20400**
DEA0031083	ESAFC25P-B-XXL	**XXL**			**20400**
DEA0031084	ESAFC25P-B-3XL	**3XL**			**20400**

25 cal/cm² ARC Flash Protection- ARC Flash Hood

PCN	Product Code	Size	Product Description	Image	List Price (INR) Per Nos.
EBASAI1001	ESAFC25H-0	**Universal**	• High Arc Flash Protection: Visor rated for 25 cal/cm^2 are flash protection • Ergonomic Design: Round cut U-shape at shoulders for enhanced shoulder mobility • Wide Field of View: Clear visor offering maximum peripheral visibility • Universal Fit: Designed to suit a wide range of users and applications		**47900**

25 cal/cm² ARC Flash Protection - Hand Gloves

PCN	Product Code	Size	Product Description	Image	List Price (INR) Per Pair
DEA0031124	ESAFG25	**Universal**	• High Arc Flash Protection: Provides up to 25 cal/cm^2, ideal for high-risk environments • Inherent Flame Resistance: Crafted from durable, flame-resistant materials • Ergonomic Design: Ensures comfort and flexibility for unrestricted movement. • Universal Fit: Designed to fit most sizes • Safety Compliance: Tested to meet ASTM F2675 / F2675M-19 standards		**7730**

ELECTRICAL SAFETY PRODUCTS

ARC Flash Protection Products - 40 cal/cm²

The Kamfet ESK-40 Arc Flash Protection Kit is engineered to deliver maximum protection, comfort, and mobility for electrical professionals working in high-energy environments. It is rated at 40 cal/cm², meets Category 4 PPE requirements, and exceeds international safety standards.

With Raychem RPG's long-standing expertise in arc flash protection and a deep understanding of on-ground needs, this next-generation arc flash kit redefines comfort, style, and performance. The breathable fabric, optimal fit, and advanced protection system create a professional solution.

Feel the difference. Wear the future of arc flash protection.



Superior Protection:

- Arc Thermal Performance Value (ATPV): 40 cal/cm² – Category 4 PPE
- 100% Inherent FR Fabric: Engineered blend of Modacrylic, Meta-Aramid, Para-Aramid, Anti-static fibres, and Lenzing FR

Ergonomic Design & Comfort :

- Lightweight and breathable construction
- Optimised for a tailored fit, mobility, and all-day comfort
- Adjustable suspenders, elastic waist, and contoured cuts
- Covered zippers and storm flaps for added protection
- Flame-resistant Velcro® and high-durability closures
- Modernised sporty design for a professional appearance

High-Visibility Arc Flash Face Hood :

- Next-gen clear lens technology for enhanced color perception and reduced eye fatigue
- 40 cal/cm² - rated anti-fog, anti-scratch face shield
- Ergonomic hood with integrated hard hat compatibility

Certifications and compliance:

- NFPA 70E – Electrical Safety in the Workplace
- ASTM F1506 – Flame Resistant and Arc-Rated Protective Clothing
- ASTM F2178 – Arc Rating for Face and Eye Protection
- ASTM F2621 – Evaluation of Finished Product Arc Response
- IEC 61482-2 – Protective Clothing Against the Thermal Hazards of an Electric ARC

40 cal/cm² ARC Flash Protection Kit

PCN	Product Code	Size	Product Description	Image	List Price (INR) Per Nos.
DEA0031049	ESK40-S	S	40 cal/cm² ARC Flash Protection Kit Contains • Jacket • BIB Overalls • ARC Flash Hood • Class E Helmet • Safety Eyewear • Storage Bag		105600
DEA0031050	ESK40-M	M			105600
DEA0031051	ESK40-L	L			105600
DEA0031052	ESK40-XL	XL			105600
DEA0031053	ESK40-XXL	XXL			105600
DEA0031054	ESK40-3XL	3XL			105600

40 cal/cm² ARC Flash Protection - Jacket

PCN	Product Code	Size	Product Description	Image	List Price (INR) Per Nos.
DEA0031099	ESAFC40J-B-S	S	• Next Gen Collar Design - Enhances fit and adds a touch of modern style • Durable Zip with Snap Button Closure- Ensures secure fastening and long-lasting wear • Knitted Cuffs - Provide a snug fit around the wrists to keep out dust and wind • Self-Folded Placket - Offers a clean, structured look without extra stitching • Fold-Over Hem - Creates a neat and professional bottom finish • Concealed Inner Seams - Deliver a smooth and tidy interior, reducing irritation • Set-In Sleeves - Allow natural arm movement for all-day comfort • Dark Fabric Color - Effectively conceals stains, maintaining a cleaner appearance • Available Sizes - S to XXL for a broad and inclusive fit range		32850
DEA0031100	ESAFC40J-B-M	M			32850
DEA0031101	ESAFC40J-B-L	L			32850
DEA0031102	ESAFC40J-B-XL	XL			32850
DEA0031103	ESAFC40J-B-XXL	XXL			32850
DEA0031104	ESAFC40J-B-3XL	3XL			32850

ELECTRICAL SAFETY PRODUCTS

40 cal/cm² ARC Flash Protection - BIB Overall

PCN	Product Code	Size	Product Description	Image	List Price (INR) Per Nos.
DEA0031105	ESAFC40B-B-S	**S**	• **Neat Finish:** Concealed seams for a clean, professional look inside and out • **Easy Donning:** Closed suspenders without buckles allow single-person use • **Waist Adjustment:** Waist gore with tab ensures a flexible and secure fit • **Bottom Extension:** Gore with two tabs allows donning over shoes • **Smooth Interior:** Inside finish with hidden seams for comfort and appearance • **Dark Color:** Minimizes visible stains, stays presentable longer • **Size Range:** Available from S to 3XL for optimal fit		**27500**
DEA0031106	ESAFC40B-B-M	**M**			**27500**
DEA0031107	ESAFC40B-B-L	**L**			**27500**
DEA0031108	ESAFC40B-B-XL	**XL**			**27500**
DEA0031109	ESAFC40B-B-XXL	**XXL**			**27500**
DEA0031110	ESAFC40B-B-3XL	**3XL**			**27500**

40 cal/cm² ARC Flash Protection - ARC Flash Hood

PCN	Product Code	Size	Product Description	Image	List Price (INR) Per Nos.
DEA0031035	ESAFC40H-O	**Universal**	• **High Arc Flash Protection:** Visor rated for 40 cal/cm² arc flash protection • **Ergonomic Design:** Round cut U-shape at shoulders for enhanced shoulder mobility • **Wide Field of View:** Clear visor offering maximum peripheral visibility • **Universal Fit:** Designed to suit a wide range of users and applications		**49500**

40 cal/cm² ARC Flash Protection - Hand Gloves

PCN	Product Code	Size	Product Description	Image	List Price (INR) Per Pair
DEA0031125	ESAFG40	**Universal**	• **High Arc Flash Protection:** Provides up to 40 cal/cm², ideal for high-risk environments • **Inherent Flame Resistance:** Crafted from durable, flame-resistant materials • **Ergonomic Design:** Ensures comfort and flexibility for unrestricted movement. • **Universal Fit:** Designed to fit most sizes • **Safety Compliance**: Tested to meet ASTM F2675 / F2675M-19 standards		**11000**

ELECTRICAL SAFETY PRODUCTS

Insulated Rescue Hook




Kamfet Insulated Rescue Hook is a critical safety tool designed to rescue personnel from electrically hazardous areas without endangering the rescuer. Constructed with high-dielectric, non-conductive materials, it is suitable for use in electrical substations, industrial environments, utility services, and confined spaces. The robust hook and insulated shaft ensure quick and safe withdrawal of victims from arc flash or electric shock zones.

Kamfet Insulated Rescue Hook features a foam-filled, fibreglass-reinforced handle for superior electrical insulation and a coated, epoxy coated hook with an 18" opening.

Kamfet Insulated Rescue Hook protects the rescuer from electrical hazards while maintaining a safe distance when positioning the rescue hook around the torso or under the arms to remove the injured worker.

- **Insulated Design:** Prevents direct contact with the victim, protecting the rescuer from electrical hazards
- **High Voltage Rating:** Insulation tested up to 100 kv
- **Non-Conductive Shaft:** Foam-filled fibreglass-reinforced plastic (FRP) handle offers superior insulation
- **Robust Hook Design:** Epoxy-coated Hook with 18" opening
- **Curved Hook:** Designed for a secure grip on the victim's body, clothing, or safety harness
- **Lightweight & Durable:** Weighs approximately 2.1 kg, ensuring easy handling and deployment
- **Lengths Available:** Standard 6 ft (1.65 m), Optional 3 ft & 8 ft models

Ordering Code	Product Code	Length in feet	Weight in KG	List Price (INR) Per Nos.	MOQ
EBAISR1001	ESRH-3	3	1.6	**16000**	2 Nos. in (1 Box)
EBAISR1002	ESRH-6	6	2.1	**22500**	2 Nos. in (1 Box)
EBAISR1003	ESRH-8	8	2.6	**28250**	2 Nos. in (1 Box)

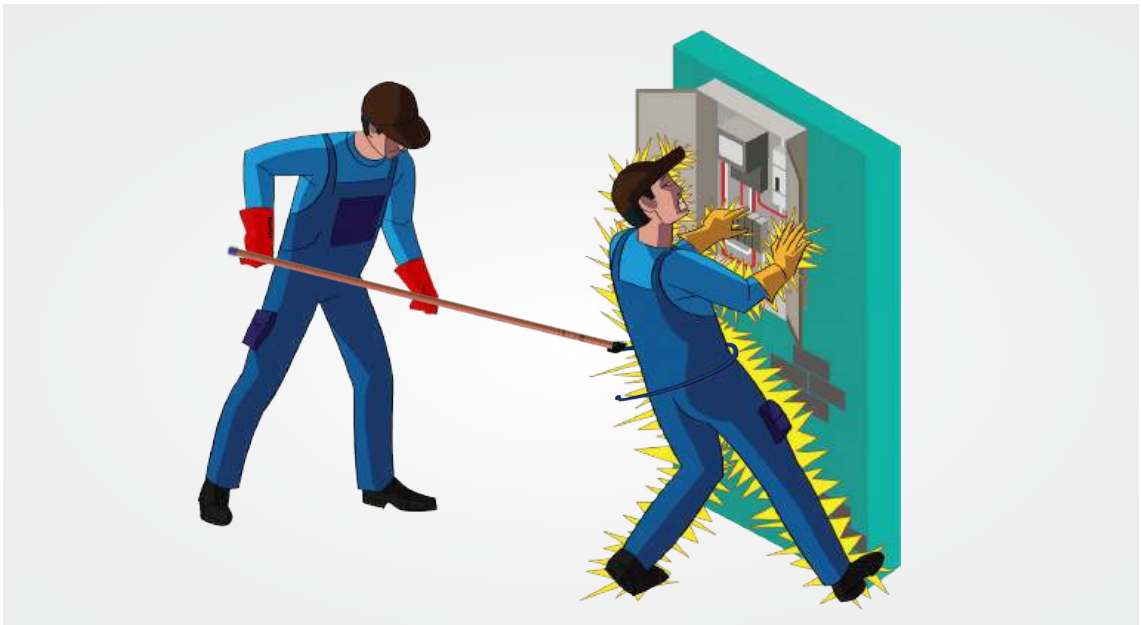

ELECTRICAL SAFETY PRODUCTS

Static Discharge Stick



A Static Discharge Stick is a safety tool designed to safely release residual electrical energy from de-energised high and medium-voltage equipment. This includes systems such as capacitors and switchgear, which can retain hazardous charges even after the power is turned off. The primary purpose of the discharge stick is to protect maintenance personnel from electrical shocks by safely redirecting any remaining charge to the ground before work begins.

These sticks are typically made from high-dielectric insulating materials, like fibreglass, to ensure maximum safety. One end of the stick features a metal hook or clamp for attaching to the charged equipment, while the other end is connected to a grounding cable that links to a secure earth point. The discharge stick ensures the equipment is safe to handle during servicing or inspection by providing a controlled route for the static charge to dissipate.

- Foam-filled FRP stick for superior electrical insulation
- Electrolytic-grade copper hook for high conductivity
- TPE-coated copper cable
- Textured finish for better grip
- Cross-dimensional yarn for enhanced mechanical strength and durability
- Heavy-duty grounding clamp
- Insulation tested up to ^{3}100 kv
- Bright orange colour for high visibility

Ordering Code	Product Code	Stick Length in feet	Cable Length in Meter	Stick Weight in KG	List Price (INR) Per Nos.
EBAISG1001	ESDS-62S	6	2.5	3.6	**33000**
EBAISG1002	ESDS-65S	6	5	3.6	**39900**
EBAISG1003	ESDS-67S	6	7	3.6	**47900**
EBAISG1004	ESDS-610S	6	10	3.6	**57500**



Service Offering and Installation

Your Trusted Partner



SERVICE OFFERINGS & INSTALLATION

Low Voltage Cable Accessories - Cold Applied Joint Kit

Straight Through Joint

Model	Connector Type	Aluminium Crimping Type	
	No. of Cable Core	3.5 Core	4 Core
	Cable Size (Sq. mm)	Installation Charge	
RVSJ-C1 - C6	25 - 400	2450	3210
	Connector Type	Mechanical Type	
RVSJ-M1 - M4	25 - 400	2450	3210

Model	Earthing Braid Material	Aluminium	Tin Plated Copper
	No. of Cable Core	3.5 Core	4 Core
	Cable Size (Sq. mm)	Installation Charge	
RLVJ - S0 - S6	6 - 400	2450	3210

Low Voltage Cable Accessories - Heat Shrinkable Joint Kit

Straight Through Joint

Model	No. of Cable Core	3.5 Core	4 Core
	Cable Size (Sq. mm)	Installation Charge	
EPKJ	2.5 - 630	2450	3210
SFKJ	4 - 500	2450	3210
ECKJ	2 to 75	4120	4120

Medium Voltage Cable Accessories - Indoor and Outdoor Heat Shrinkable Termination Kit

Indoor and Outdoor 11kV Termination Kit

Model	No. of Cable Core Cable Size (Sq. mm)	No. of Cable Core Cable Size (Sq. mm)	1 Core Cable		3 Core Cable	
			Service PCN	Installation Charge	Service PCN	Installation Charge
Indoor Termination	EPKT-S	35 to 1000	SI995469AT	3670	SI995469AW	6120
	EPKT-C					
	HVT-M					
	HST-L					
Outdoor Termination	EPKT-S	35 to 1000	SI995469AT	3670	SI995469AW	6120
	EPKT-C					
	HVT-M					
	HST-L					

Indoor / Outdoor 22kV Termination Kit

Termination Type	Model	Cable Size (Sq. mm)	1 Core Cable		3 Core Cable	
			Service PCN	Installation Charge	Service PCN	Installation Charge
Indoor Termination	EPKT-S	35 to 1000	SI995461AAS	3670	SI995461AAT	6120
	EPKT-C					
	HVT-M					
Outdoor Termination	EPKT-S	35 to 1000	SI995469AAS	3670	SI995469AAT	6120
	EPKT-C					
	HVT-M					

(*) Installation Charges - Kindly refer to Terms & Conditions and Inclusion & Exclusion applicable for Installation Charges

SERVICE OFFERINGS & INSTALLATION

Medium Voltage Cable Accessories - Indoor and Outdoor Heat Shrinkable Termination Kit

Indoor / Outdoor 33kV Termination Kit

Termination Type	Model	Cable Size (Sq. mm)	1 Core Cable		3 Core Cable	
			Service PCN	Installation Charge	Service PCN	Installation Charge
Indoor Termination	EPKT-S	35 to 1000	SI995461AAU	7760	SI995469AAC	10700
	EPKT-C					
	HVT-M					
Outdoor Termination	EPKT-S	35 to 1000	SI995469AZ	7760	SI995469AAC	10700
	EPKT-C					
	HVT-M					

Medium Voltage Cable Accessories - Straight Through Heat Shrinkable Joint Kit

11kV Straight Through Joint Kit

Joint Type	Model	Cable Size (Sq. mm)	1 Core Cable		3 Core Cable	
			Service PCN	Installation Charge	Service PCN	Installation Charge
Straight through Joint	EPKJ-S	35 to 1000	SI995469AS	3670	SI995469AV	6120
	EPKJ-C	35 to 1000				
	HVS-X-M	35 to 1000				
	HSJ-L	35 to 1000				
	MXSW	25 to 1000				

22kV Straight Through Joint Kit

Joint Type	Model	Cable Size (Sq. mm)	1 Core Cable		3 Core Cable	
			Service PCN	Installation Charge	Service PCN	Installation Charge
Straight through Joint	EPKJ-S	35 to 1000	SI995469AAU	3670	SI995469AAV	6120
	EPKJ-C					
	HVCJ-M					
	MXSW					

33kV Straight Through Joint Kit

Joint Type	Model	Cable Size (Sq. mm)	1 Core Cable		3 Core Cable	
			Service PCN	Installation Charge	Service PCN	Installation Charge
Straight through Joint	EPKJ-S	35 to 1000	SI995469AY	7770	SI995469AAB	13750
	EPKJ-C					
	HVCJ-M					
	MXSW					

(*) Installation Charges - Kindly refer to Terms & Conditions and Inclusion & Exclusion applicable for Installation Charges

SERVICE OFFERINGS & INSTALLATION

Medium Voltage Cable Accessories - Switchgear Plug-in Termination

11 KV Switchgear Outer Cone Termination

Connector Type	Model	Cable Size (Sq. mm)	Max. Current (Amp)	Cable Insulation Diameter Range (in mm)	1 Core Cable Installation Charge	3 Core Cable Installation Charge
Front Connectors Type C Bushing	**ELBC**	35- 400	**800A**	**13.5-37.5**	**4530**	**13850**
Front Connectors Type C Bushing	**RSTI**	35- 800	**800A - 1250A**	**13.5-37.5**	**5490**	**13850**
Rear (Coupling) Connectors Type C Bushing	**ELBC**	35- 400	**800A**	**13.5-37.5**	**4530**	**13850**
Rear (Coupling) Connectors Type C Bushing	**RSTI**	35- 800	**800A - 1250A**	**13.5-37.5**	**5490**	**13850**

22 KV Switchgear Outer Cone Termination

Connector Type	Model	Cable Size (Sq. mm)	Max. Current (Amp)	Cable Insulation Diameter Range (in mm)	1 Core Cable Installation Charge	3 Core Cable Installation Charge
Front Connectors Type C Bushing	**ELBC**	35- 800	**800A - 1250A**	**17.0-37.5**	**4530**	**13850**
Front Connectors Type C Bushing	**RSTI**	35- 800	**800A - 1250A**	**12.7-59.0**	**5490**	**13850**
Rear (Coupling) Connectors Type C Bushing	**ELBC**	35- 800	**800A - 1250A**	**17.0-52.0**	**4530**	**13850**
Rear (Coupling) Connectors Type C Bushing	**RSTI**	35- 800	**800A - 1250A**	**12.7-59.0**	**5490**	**13850**

33 KV Switchgear Outer Cone Termination

Connector Type	Model	Cable Size (Sq. mm)	Max. Current (Amp)	Cable Insulation Diameter Range (in mm)	1 Core Cable Installation Charge	3 Core Cable Installation Charge
Front Connectors Type C Bushing	**ELBC**	35- 800	**800A - 1250A**	**24.5-59.0**	**4900**	**12250**
Front Connectors Type C Bushing	**RSTI**	35- 800	**800A - 1250A**	**22.4-59**	**8230**	**18350**
Rear (Coupling) Connectors Type C Bushing	**ELBC**	35- 800	**800A**	**24.5-59.0**	**4900**	**12250**
Rear (Coupling) Connectors Type C Bushing	**RSTI**	35- 800	**800A - 1250A**	**24.5-59.0**	**8230**	**18350**

Switchgear Inner Cone Termination

Connector Type	System Voltage (kV)	Size of Bushing	Current (Amp)	Insulation Diameter Range (in mm)	Installation Charge
RPIT	**up to 36kV**	**Size - 2**	**800**	**19.5 - 42**	**Available on request**
	up to 42kV	**Size - 3**	**1250**	**26 - 50**	**Available on request**
Trifurcation Kit	**up to 42kV**	**Size - 2/3**	**-**	**-**	**Available on request**

(*) Installation Charges - Kindly refer to Terms & Conditions and Inclusion & Exclusion applicable for Installation Charges

SERVICE OFFERINGS & INSTALLATION

66KV Cable Accessories - **Single Core Cable**

Model	Type	Cable Size in Sq.mm.	Service PCN	Installation Charge
IHVT	Indoor Termination	Upto 1200	**SI995469AAF**	**19550**
OHVT	Outdoor Termination		**SI995469AAF**	**19550**
EHVS	Straight Joint		**SI995469AAE**	**19550**
PHVS/PHVT	GIS Termination		**SI995469AAG**	**45850**
OHVT-C	Oil Fill Outdoor Termination		**SI995469AAL**	**97800**

66KV Cable Accessories - **Three Core Cable**

Model	Type	Cable Size in Sq.mm.	Service PCN	Installation Charge
IHVT	Indoor Termination	Upto 3 Core X 300	**SI995469AAI**	**61450**
OHVT	Outdoor Termination		**SI995469AAI**	**61450**
EHVS	Straight Joint		**SI995469AAH**	**61450**
PHVS/PHVT	GIS Termination		**SI995469AAJ**	**61450**
OHVT-C	Oil Fill Outdoor Termination		**SI995461AAX**	**245400**

110KV / 132KV Extra High Voltage Cable Accessories - **Single Core Cable**

Model	Type	Cable Size in Sq.mm.	Service PCN	Installation Charge
OHVT-C	Oil Fill Outdoor Termination	Upto 3 Core X 300	**SI995469AAL**	**97800**
PHVS/PHVT	GIS Termination		**SI995469AAM**	
EHVS	Straight Joint		**SI995469AAK**	

220KV Extra High Voltage Cable Accessories - **Single Core Cable**

Model	Type	Cable Size in Sq.mm.	Service PCN	Installation Charge
OHVT-C	Oil Fill Outdoor Termination	Upto 2500	**SI995469AAO**	**160450**
PHVS/PHVT	GIS Termination		**SI995469AAP**	
EHVS	Straight Joint		**SI995469AAN**	

(*) Installation Charges - Kindly refer to Terms & Conditions and Inclusion & Exclusion applicable for Installation Charges.

INSTALLATION CHARGES – INCLUSION & EXCLUSION

INCLUSIONS

- Deputation of skilled manpower for installation
- Travelling charges for technical installation personnel (Single Visit)
- Tools & Tackles required for installation
- Transportation of Tools & Tackles and associated items required for installation
- Warranty 12 Months from the date of Installation

EXCLUSIONS

- Local Transportation for technical installation personnel at site
- Boarding & Lodging charges of technical installation personnel (Executive Grade)
- Providing AC Tent for installation of Straight Joint/ Scaffolding for Termination
- Arrangement of Local Manpower for support during installation
- Arrangement of LPG Gas, Adequate Lighting and Drinking Water
- Arrangement of uninterrupted power supply at site
- Obtaining necessary local permissions, if required
- Lifting arrangement such as crane etc. should be provided at site
- Cleaning Consumable required for installation
- Providing Safety barricading at project site (barrier boards / caution tape)
- Testing & Commissioning - All Testing & Commissioning activities including Cable Sheath test etc.
- Disposal of Cut length of cable and scrap materials

Civil Work:

- Construction of Jointing Bay
- Digging and Back filling Joint Bay
- All fabrication work for supporting cable for installation of termination

Link Box:

- Civil work required for Installation of Link Box
- Mounting of Link Boxes
- Cable and connectors for link box connection to be provided at site

GIS Termination:

- Dismantling the switchgear casing for the cable termination to enable mounting of the GIS Cable terminations
- Filling of SF6 gas in switchgear
- Performing DC test (including arrangement of DC test set)
- Proper sealing of Cable ends to be provided by customer
- Duly covered Scaffolding for carrying out installation

Outdoor Termination:

- Cable must be laid properly upto the Outdoor structure
- Cable must be properly fixed by cleats onto the Outdoor structure
- Cable ends to be properly sealed
- Duly covered Scaffolding for carrying out installation
- Mounting/Lifting of termination


Straight Joint:

- Laying of Cable inside the jointing bay – cable should be laid straight without any bend inside the jointing bay
- Cable ends should be properly sealed to prevent ingress of moisture and foreign particles inside the cable
- Phase sequencing of cables to be done and identification of phases with proper marking to be done

INSTALLATION CHARGES – TERMS & CONDITIONS

1	Price	Installation Charges mentioned is Net value excluding of all taxes and duties applicable in India
2	MOQ	LVCA - 100 nos.; MVCA-50 nos.; HVCA-24 nos., EHVCA- 6 nos.
3	Service Payment Terms	100% as interest free advance along with Purchase Order
4	Idling Charges	In the event work front (project site) is not made available to RRL team for carrying out installation services, Idling charges at the rate of Rs. 10000 per man-day will be charged.
5	Installation/ Mobilization	Installation schedule for the installation work to be provided 30 days prior to the actual commencement of work.1
6	Variations	The prices quoted by RRL is considering the entire quantity of cable accessories to be installed as per quantity mentioned in this contract. Should there be any changes/ variations in the quantity/ specification, our offer shall be subject to revision.
7	Warranty	We warrant against any defects on account of improper installation for a period of 12 months from the date of installation. In the event of any failure due to improper installation / bad workmanship and reasons solely attributable to RRL scope of work, RRL shall undertake to repair / re-install the defective cable joint/termination on Free of Cost basis. However, the liability to be limited to only installation of the defective cable joint and any associated civil work shall not be part of RRL.
8	Consequential Damage	Unless otherwise specified, RRL shall not be responsible for and nor shall be liable for indirect/consequential losses and damages, suffered by client, including for loss of use, loss of profit whether such liability or claims are based upon any negligence on the part of the client or its employees in connection with the performance of the Service Order.
9	Offer Validity	30 days from the date of offer submission
10	Price Validity	One year from the date of Work Order

Raychem RPG

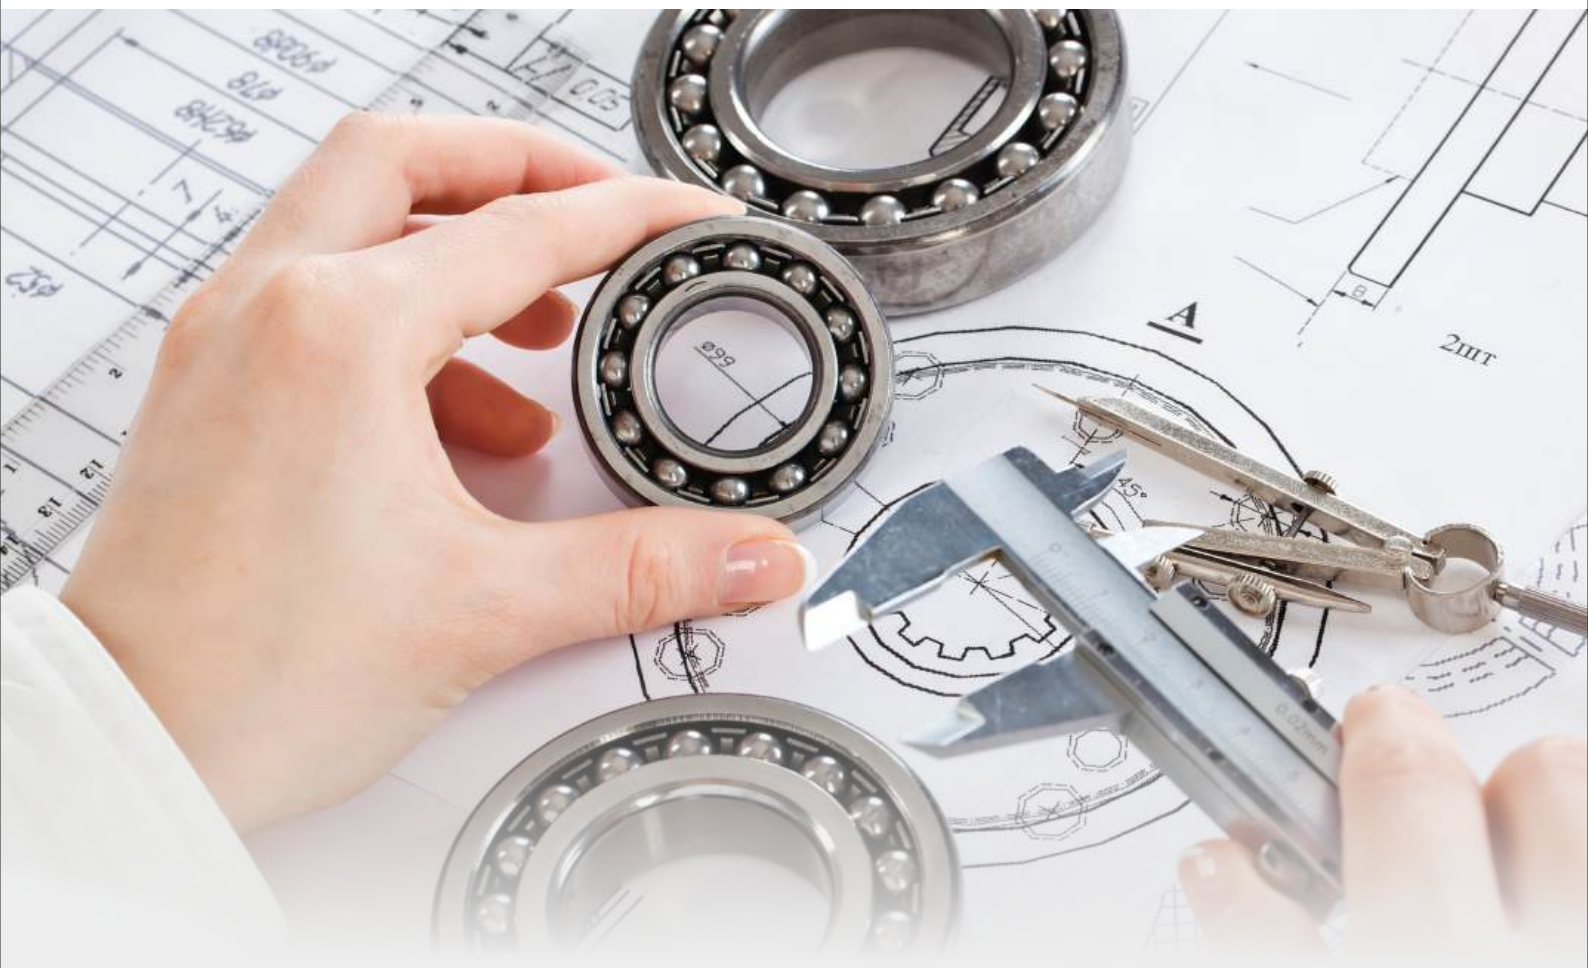

Build to Print (Customization)

Your reliable partner with expertise in manufacturing

Simple Machining | Precision Machining | Casting | Sheet Metal | Fabrication



"We offer one stop solution platform for all your customized parts requirement with our expertise in various segments of capabilities like precision machining, forging, casting, sheet-metal, fabrication, heat treatment, surface treatment and other process.

Our range covers components from the areas of mechanical, hydraulic, precision measurement, Sensor technology, electrical drive system and control technology.

Combining manufacturing with leading technology

Why wait? Contact us now.

Follow us on:

GENERAL TERMS

All List Prices are exclusive of GST & other taxes as applicable.
Prices are subject to revision without notice.

WARRANTY POLICY

All the products listed in the price list carry a warranty, For a period of eighteen (18) months from the date of dispatch, or twelve (12) months from the date of Installation, whichever is earlier, Raychem RPG, in its sole discretion, will repair or supply a replacement or accept a return of any product that Raychem RPG and Buyer mutually agree contains a defect in material and workmanship.

Raychem RPG's warranty obligations shall be subject to and contingent upon the following:

1. The product shall be installed in accordance with Raychem RPG's instructions, in accordance with any other applicable instructions (to the extent not in conflict with Raychem RPG's instructions), and in accordance with good industry practice, and;

2. In event of any claim pursuant to this warranty, Raychem RPG shall be promptly notified and provided an opportunity to inspect such product as installed, and Raychem RPG shall have the right to retain for its own use and testing and product replaced.

Except as provided in the preceding paragraphs, Raychem RPG makes no warranties of any kind whatsoever, either express or implied, including without purpose. Raychem RPG's sole liability to buyer shall be for a repair or replacement of product, or to credit buyer's account, as set forth above, and in no event will Raychem RPG be liable for expenses, liabilities or losses associated with the Installation or removal of product, or the Installation for loss of profits, loss of use, or incidental, interest, consequential or special damages of any kind.

The warranty is however subject to the provision of proper usage, efficient maintenance and does not cover defects arising out of fire, accident, inefficient maintenance, faulty operation and wilful or accidental damage. The user needs to take adequate precautions to eliminate these conditions. The manufacturer shall not be liable for any consequential loss, injury, or damages attributable to defect or failure of its products.

NOTE

NOTE

NOTE

Raychem RPG

OFFICE

HEAD OFFICE
Raychem RPG (P) Ltd.
A-1401, 14th Floor, ThaneOne,
DIL Complex, Majiwada,
Thane (West) 400610

REGIONAL CONTACTS

New Delhi
C/O Innov8, 2nd Floor, Regal Building
44, Connaught Circle,
Hanuman Road Area,
Connaught Place, New Delhi 110001
(Opposite: Palika Parking/Above CCD)

Karnataka
MSR North Tower-16th Floor,
Dr. Puneeth Raj Kumar Road,
MS Ramaiah North City,
Nagavara, Bengaluru,
Karnataka 560045

Tamil Nadu
Olympia Platina 9th Floor,
Plot No. 33-B, South Phase,
Guindy Industrial Estate,
Chennai 600 032

West Bengal
Urban Wrk- Techno Polis,
8th, BP Block, Sector V,
Bidhannagar, Kolkata,
West Bengal 700091

To learn more about Raychem RPG solutions and offering visit **www.raychemrpg.com**
Or reach our Customer Interaction Cell
Contact: **022-45745060**
Email: **cic@raychemrpg.com**

Follow us on :

Disclaimer

- Product improvement is a continuous process.
  For the latest information and special application, please contact any of our offices listed here.
- Product photographs shown for representative purpose only.

01102026/EPD/PL/HK_V0_3009